



ProTools 60 Linear Perimeter Recessed



A continuous linear system that delivers even illumination to a wall from above the finished ceiling to illuminate a space and define vertical surfaces.

Housing	Precision extruded aluminum for true dimensions and tolerances Toolless component assembly from below Perfect fit with inserts, louvers and lenses Standard and tailored lengths including corner configurations <i>Soft Graze</i> adds 1" - 3" additional set-off for less dramatic graze Recessed snap-in cover for non-illuminated section Finishes: white, black, silver and custom
Integration	Fixation into gypsum, hard ceilings and all grid ceiling types Finished wall continues past the ceiling line
Distribution	Evenly illuminated regressed, recessed lens or <i>Soft Graze</i>
LED	Static White, 2700K - 4000K, 3 W - 15 W/ft, constant current, >90 CRI, 3-Step MacAdam Tunable White, 1800K - 4000K / 2700K - 6500K, 3 W - 15 W/ft, constant current, >90 CRI L70 (TM21 Projected 85°C) Static White / Tunable White = 50,000 hours
Optic	RML - recessed micro-prismatic lens diffusion with maximum efficiency RSL - recessed satin opal lens diffused illumination with a clean, flush appearance ROL - Regressed opal lens diffused light with reduced glare FOL - Flush opal lens diffused illumination even the ceiling RLW/RLB - recessed louver white (W) or black (B) extreme cutoff REO - Recessed elliptical optic - high efficiency graze
Reflector	White: high efficiency (standard with RLW) Black: no brightness (standard with RLB) Silver: low brightness All 15% gloss Custom finish available
Driver	Compatible with quality constant current drivers
Connectivity	Lutron Athena Wireless Node RF Casambi BlueTooth
Weight	4lbs per foot
Operating Temp	Suitable for operation in maximum ambient temperature of 35C (95F)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Chicago plenum
Voltages	120-277VAC

technical
information

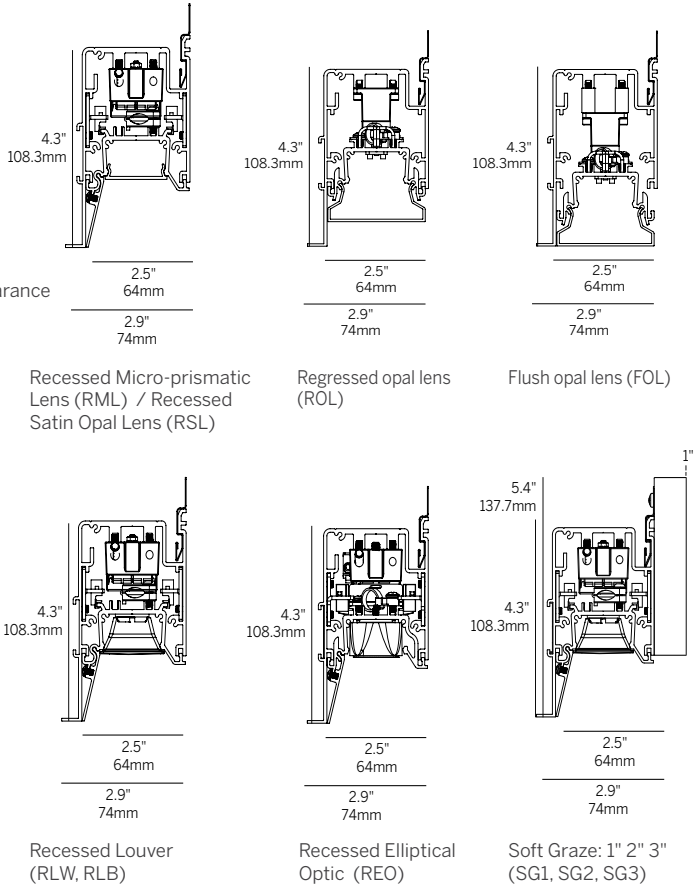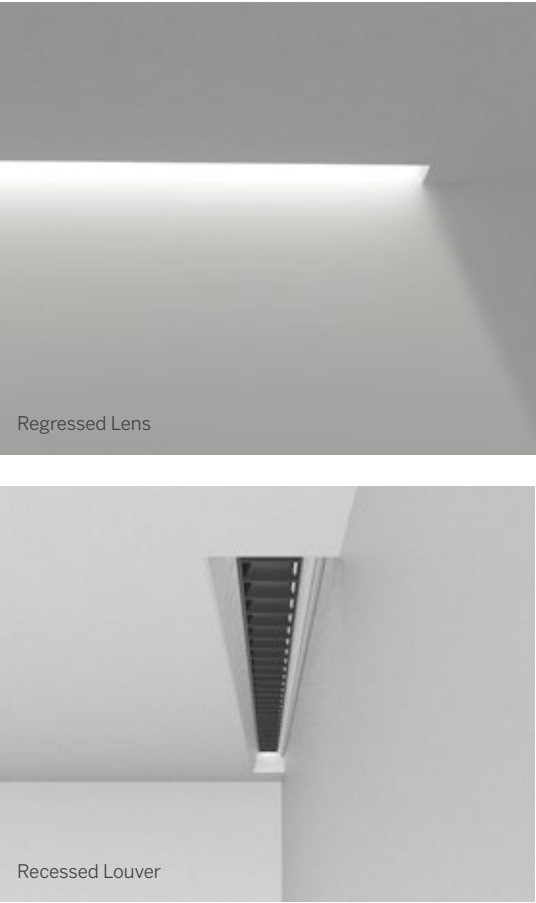

ProTools 60 Linear Perimeter Recessed

Model	Fixation	Pattern	Length ²	CRI/CCT	Optic	Beam	Power ⁵	Driver ⁶	Housing Finish	Reflector Finish	Options
WG-60PTLP	RPT	S	24	927	RML	80	P1	E1	W (std)	W (std)	AWNRF
WG-60PTLPSG1	RBT	PI ¹	48	930	RSL		P2	L1	B	B	BT
WG-60PTLPSG2	RGT9	PO ¹	96	935	ROL	105	P3	D2DT6	S	S	CP
WG-60PTLPSG3	RGT15		XX ³	940	FOL		P4	D2DT8	F	F	EM
				TW1840 ⁴	RLW	35					NYC
				TW2765 ⁴	RLB	50					TF
					REO	20x40					

- Model**
- WG-60PTLP = ProTools 60 Linear Perimeter
 - WG-60PTLPSG1 = ProTools 60 Linear Perimeter Soft Graze 1" extension
 - WG-60PTLPSG2 = ProTools 60 Linear Perimeter Soft Graze 2" extension
 - WG-60PTLPSG3 = ProTools 60 Linear Perimeter Soft Graze 3" extension
- Fixation**
- RPT = Recessed plaster trim
 - RBT = Recessed trim for hard ceiling
 - RGT9 = Recessed trim for 9/16" grid
 - RGT15 = Recessed trim for 15/16" grid

- Pattern**
- S = Straight run
 - PI = Standard patterns 2, 3 or 4 sided with 90° inside corners on the same plane¹
 - PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane¹

- Length²**
- 24 = 24"
 - 48 = 48"
 - 96 = 96"
 - XX = Specify inches to the nearest 0.25"³

- CRI / CCT** (90+ CRI minimum)
- 927 = 2700K
 - 930 = 3000K
 - 935 = 3500K
 - 940 = 4000K
 - TW1840 = Tunable white 1800K - 4000K⁴
 - TW2765 = Tunable white 2700K - 6500K⁴

- Optic**
- RML = Recessed micro-prismatic lens
 - RSL = Recessed satin opal lens
 - ROL = Regressed opal lens (N/A with *Soft Graze*)
 - FOL = Flush opal lens (N/A with *Soft Graze*)
 - RLW = Recessed louver white (supplied with white reflectors standard)
 - RLB = Recessed louver black (supplied with black reflectors standard)
 - REO = Recessed elliptical optic

- Beam**
- 80 = 80° (RML, RSL)
 - 105 = 105° (ROL, FOL)
 - 35 = 35° (RLW, RLB)
 - 50 = 50° (RLW, RLB)
 - 20x40 = 20x40° (REO)

- Power⁵**
- P1 = 3 W/ft
 - P2 = 6 W/ft
 - P3 = 10 W/ft
 - P4 = 15 W/ft

- Driver (integral)⁶**
- E1 = eldoLED 0.1% dimming, 0-10V (120-277V)
 - L1 = Lutron 1% dimming, Ecosystem (120-277V)
 - D2DT6 = DALI-2 (DT6) for Static White, 0.1% dimming (120-277V)
 - D2DT8 = DALI-2 (DT8) for Tunable White 0.1% dimming (120-277V) [TW only]

- Housing / Trim Finish**
- W = White, 15% gloss, RAL 9003 (standard)
 - B = Black, 15% gloss, RAL 9005
 - S = Silver, 15% gloss, RAL 9006
 - F = Custom finished trim, specify RAL

- Reflector Finish**
- W = White, 15% gloss, RAL 9003 (standard)
 - B = Black, 15% gloss, RAL 9005
 - S = Silver, 15% gloss, RAL 9006
 - F = Custom finished trim, specify RAL

- Options**
- AWNRF = Lutron Athena Wireless Node RF (specify with E1, D2DT6 or D2DT8)
 - BT = Wireless CAS – Casambi (remote only, specify with E1, D2DT6 or D2DT8)
 - EM = Emergency LED driver (remote)
 - NYC = 6' whip per run
 - TF = Top feed

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- See pattern spec sheet.
 - Individual fixture lengths less than 2' may require remote driver.
 - Specify Lensed products to nearest 0.25". Specify Louvered and Tuneable White products in 12" increments for continuous light. Louver supplied in 12" increments, balance of the run will have recessed blank covers on ends.
 - TW only available with RML, RSL, ROL and FOL.
 - Refer to specsheet for delivered lumen data for all product configurations.
 - See power supply page for details.

