


Skin Wall Washer Surface / Recessed



Contents	
2	product configurator
2	diagrams / drivers
3	flexibility
4	photometry

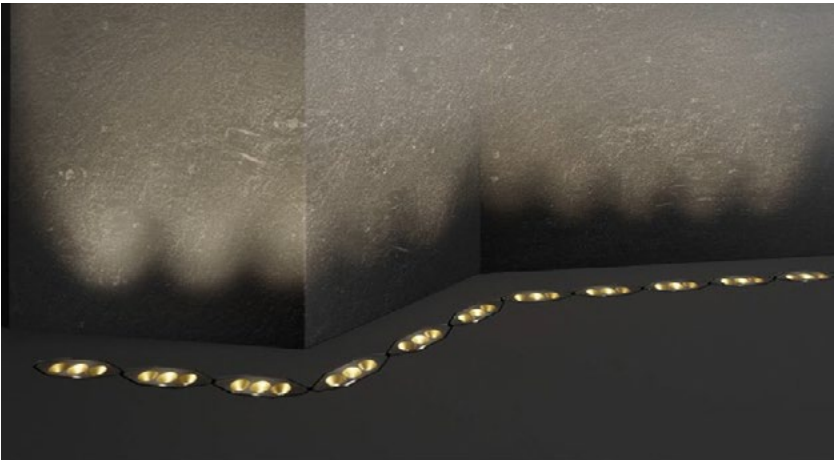

8.7" (13W)

General: The Skin family of lighting fixtures is aimed to provide flexibility in illuminating most applications. From wall washing to evenly illuminating architectural curves like columns and curved walls, you will find a Skin for any need. Available as Ceiling, Wall and In-ground, with possibility to Surface, Recessed or Semi-Recessed mounting. With multiple beam spreads and an attention to how optical elements interact with the surrounding environment, Skin will draw attention to what matters the most while fully blending into the space.

Fixture Body: Open pore Anodized and Powder Coated Die-Cast Aluminum, Black finish.

Diffuser: Extra-clear tempered glass with silk screening.

Mounting: Stainless Steel bracket for Surface mount or ABS Housing for Recessed installations.

Walk-over: Walk-over.

Dimensions/Weight: 8.66" (3.53 lbs)

Driver: Constant Current, Remote. 120-277V Dimmable 0-10V or Non-Dim.

CC features: Less susceptible to voltage drop (exceeding 32' distance); Allows for dimming down to 0.1%; Fixtures need to be wired in series.

Wattages: 12.8W (8.66").

Cable: Fixture comes with 3.28' of power cable.

Safety features: Fixture is equipped with Electrostatic discharge protection and Surge Protection. Built-in Aquastop® (anti-wicking) system.

IP rating: IP67 for temporary flooding up to 3.28' depth for up to a maximum of 30 mins.

IK rating: IK 10 (6.54") – IK08 (8.66")

ETL Certification: ETL, wet location


Optics: Fixed, Wall Washer.

Color temperatures: 2700K – 3000K – 4000K.

CRI: 92+

Lumen Maintenance: L70 projections tested at Tj 65° C and Ta 25°.

Warranty: 5-year Limited Warranty on fixtures. 1-year Limited Warranty on Remote Drivers.

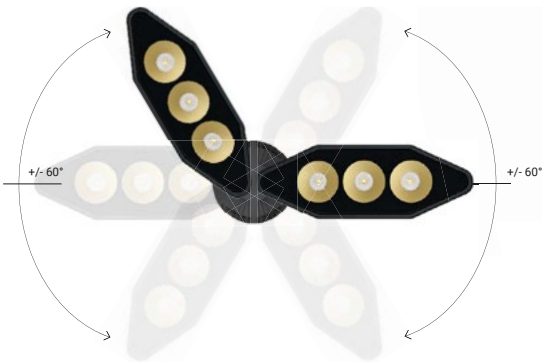


SKIN CONTINUOUS INSTALLATION OF THE INDIVIDUAL MODULES POSITIONED AT PRECISELY ANGLED STEP (ONE EVERY 10°).

Delivered Lumens*	8.7"
AS	561

*Values shown for 3000K

Ordering Information								
SKI	SRBLBL	WW	9	13 - CC		AS		
Product	Trim/Finish	Type	Length	Wattage/Operation	Color Temp	Optic	+	Recessed Housing (Optional)
SKI = Skin	SRBLBL = Surface/ Recessed Black Body, Black Cone	WW = Wall Washer	9 = 8.7"	13 CC = 12.6W / Constant Current (350mA)	27 = 2700K 30 = 3000K 40 = 4000K	AS = Asymmetric		ECO30W-350 SOLO50W-350 SOLO100W-350

8.7" 12.6W CC



DRIVER OPTIONS (pick one)

C.C. Power supply options (remote only)

ECO30W-350

0-10V EldoLED
ECOdrive 30W
for 1 fixture

SOLO50W-350


0-10V EldoLED
SOLOdrive 50W
for 1-2 fixtures

SOLO100W-350

0-10V EldoLED
SOLOdrive 100W
for 1-4 fixtures


Recessed Housings

For installation: uplight on poured concrete, downlight on existing concrete ceiling.



PVC E83124 / L 9"
suitable for: 8.7" Skin

For installation: downlight on false ceiling, downlight on poured concrete ceiling.



PVC E83126 / L 9"
suitable for: 8.7" Skin