

Tour Pendant Round Direct-Indirect



General: Tour is a comprehensive family of large pendants created to become integral part of any architectural design. Tour is available in Round, Square or Rectangular shape, with multiple sizes to choose from, and several distributions (Direct, Indirect, Direct/Indirect, Inside). Lobby spaces, conference rooms, retail stores are just some of the many applications Tour could be the perfect fit for.

Fixture Body: Powder Coated Aluminum 6060 (superior corrosion resistance).

Diffuser: Opaline UV resistant Polycarbonate.

Mounting: Suspension.

Dimensions/Weight: 29.2" (13.23 lbs) – 35.9" (16.31 lbs) – 56.3" (25.57 lbs) – 96.5" (43.87 lbs)

Driver: 120-277V. Integral inside canopy (0-10V Dimming), or Remote (0-10V Dimming or Non-Dim).

Operation: Constant Voltage, 24V DC (CV). Dual circuit provided to turn on down and up separately.

Wattages Down/Up: 37.5W/7.5W (29.1") – 45W/9W (35.9") – 70W/14W (56.3") – 114W/23W (96.5").

Power Over Suspension Cable: Max 196.9" length.

IP rating: IP40. Fixture is protected against solid objects greater than 0.04".

ETL Certification: ETL, dry location


Optics: Fixed, Direct/Indirect (Down/Up Emission with a 5:1 ratio).
General Illumination.

Color temperatures: 2700K – 3000K – 3500K – 4000K.

CRI: 90CRI


Lumen Maintenance: L70 projections tested at Tj 65° C and Ta 25°.

Warranty: 5-year Limited Warranty on fixtures. 1-year Limited Warranty on Remote Drivers.

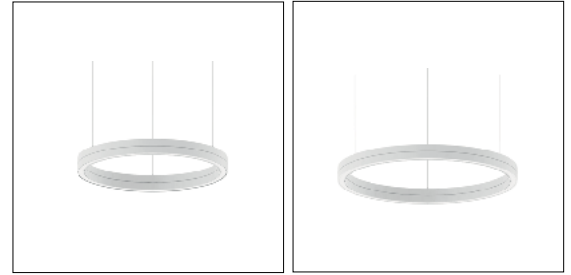

29.2" (45W)

35.9" (54W)

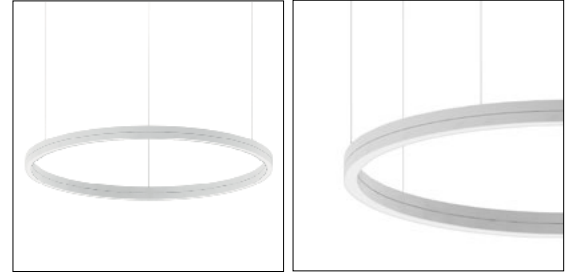

56.3" (84W)

96.5" (137W)

Delivered Lumens*	29.2"	35.9"	56.3"	96.5"
GE	2622 + 524	3181 + 636	4951 + 990	8357 + 1671

*Values shown for 3000K


Ordering Information							
TOU		DIIN			GE		
Product	Trim/Finish	Type	Diameter/Size	Wattage/Operation	Color Temp	Optic	+ Remote Driver (Required) ¹
TOU = Tour	ROWH = Round White	DIIN = Direct + Indirect Distribution	29 = 29.2"	45 CV = 37.5W+7.5W / Remote Constant Voltage 24VDC	27 = 2700K	GE = General Illumination	Remote Driver:² E64575+OT96-D010 E64670+OT96-D010 E64189+OT96-D010 E64179+OT96-D010 Driver in Canopy: E64578 E-F300011 E65142 E-F300012 E64039 E65336 E64038 E65338 E65324 E-F300021 E65326 E-F300022
	ROBL = Round Black		36 = 35.9"	54 CV = 45W+9W / Remote Constant Voltage 24VDC	30 = 3000K		
	ROBG = Round Brushed Gold		56 = 56.3"	84 CV = 70W+14W / Remote Constant Voltage 24VDC	35 = 3500K		
	ROBC = Round Brushed Copper		97 = 96.5"	137 CV = 114W+23W / Remote Constant Voltage 24VDC	40 = 4000K		

¹ See page 2


² 96.5" fixture requires two 3-cone kits

Emissions range

Tour comes with four different emissions: direct, indirect, inside and direct-indirect. Four lighting effects that can be combined with each other in countless combinations to transform the environments with a minimal and contemporary light.

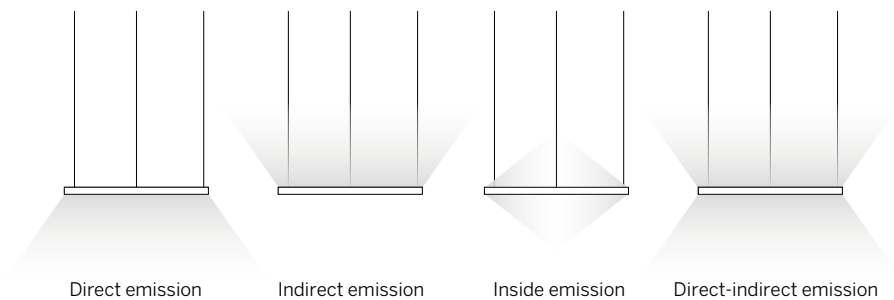

3-cone fixing kit (Remote Driver)




type

White	E64575	Gold	E64189
Black	E64670	Copper	E64179



Note: 96.5"Ø requires two fixing kits with 3-cones each

OT96-D010
Osram, 10% 0-10V dim,
96W, 24VDC, 120-277VAC,
supplied in a Dry location
enclosure

Number of drivers required		
Diameter	Single Control	Daul Control
29.2"	1 driver	2 drivers
35.9"	1 driver	2 drivers
56.3"	1 driver	2 drivers
96.5"	2 drivers	3 drivers

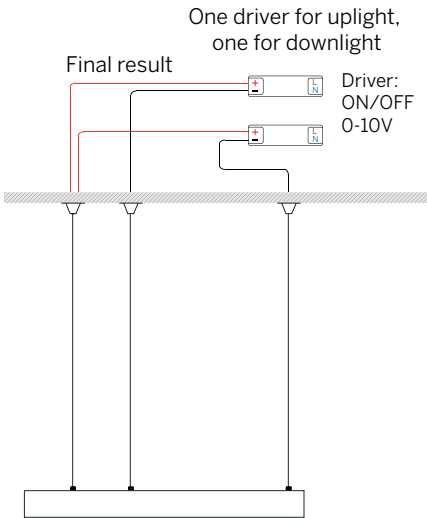


3-coupling point ceiling canopy for single control (Integral 0-10V dimming driver in canopy)

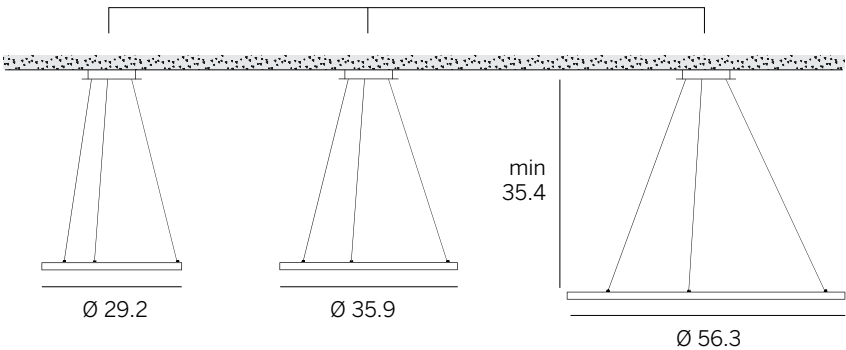


White	E64578
Black	E65142
Gold	E64039
Copper	E64038


3-coupling point ceiling canopy for dual control (Integral 0-10V dimming driver in canopy)

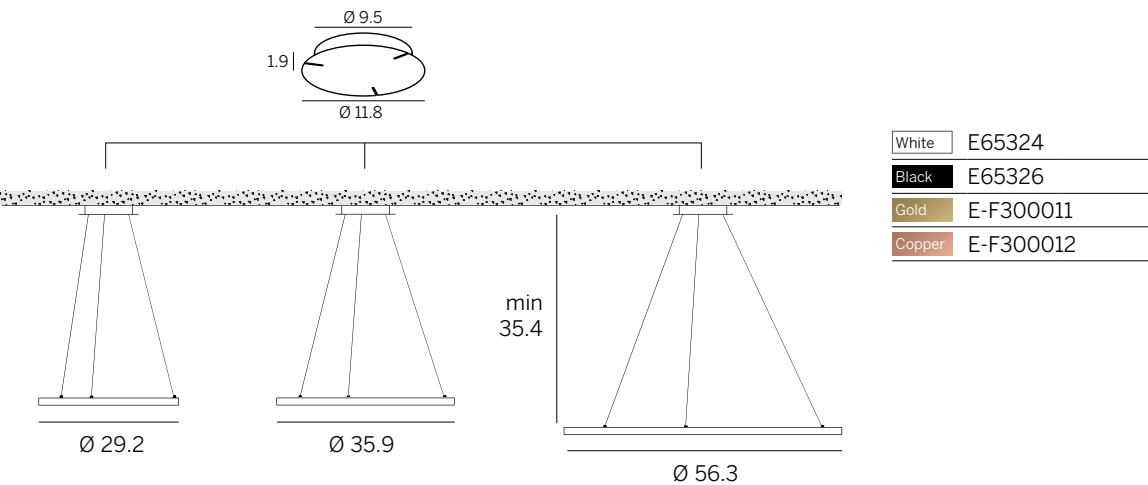


6-point coupling ceiling canopy for 96.5 inch diam. for single or dual control (Integral 0-10V dimming driver in canopy)

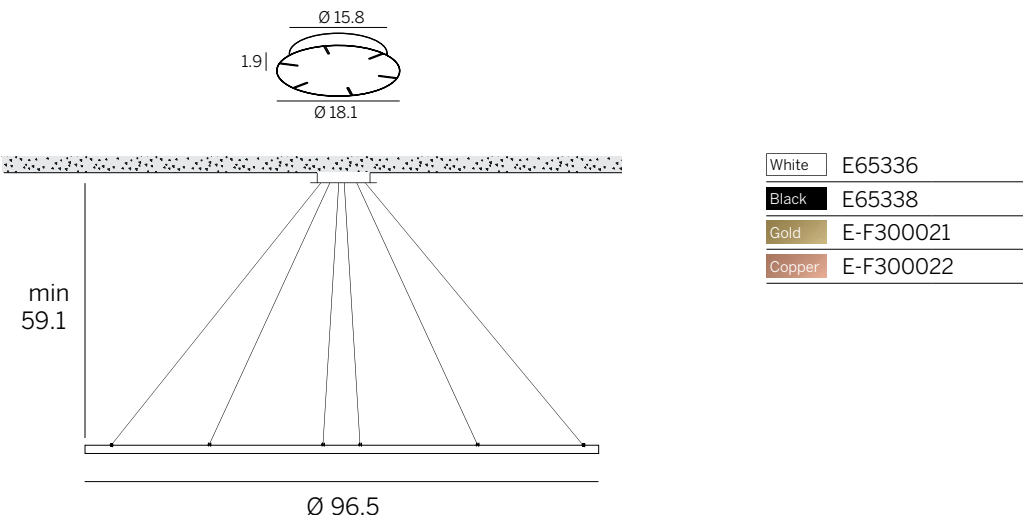


29.2" (45W)



35.9" (54W)



56.3" (84W)



96.5" (137W)

