

Tour Pendant Round Indirect



General: Tour is a comprehensive family of large pendants created to become integral part of any architectural design. Tour is available in Round, Square or Rectangular shape, with multiple sizes to choose from, and several distributions (Direct, Indirect, Direct/Indirect, Inside). Lobby spaces, conference rooms, retail stores are just some of the many applications Tour could be the perfect fit for.

Fixture Body: Powder Coated Aluminum 6060 (superior corrosion resistance).

Diffuser: Opaline UV resistant Polycarbonate.

Mounting: Suspension.

Dimensions/Weight: 29.2" (9.26 lbs) – 35.9" (11.46 lbs) – 56.3" (15.43 lbs) – 96.5" (24.25 lbs)

Driver: 120-277V. Integral inside canopy (0-10V Dimming), or Remote (0-10V Dimming or Non-Dim).

Operation: Constant Voltage, 24V DC (CV).

Wattages: 37.5W (29.1") – 45W (35.9") – 70W (56.3") – 114W (96.5").

Power Over Suspension Cable: Max 196.9" length.

IP rating: IP40. Fixture is protected against solid objects greater than 0.04".

ETL Certification: ETL, dry location


Optics: Fixed, Indirect (Up Emission). General Illumination.

Color temperatures: 2700K – 3000K – 3500K – 4000K.

CRI: 9CRI


Lumen Maintenance: L70 projections tested at Tj 65° C and Ta 25°.

Warranty: 5-year Limited Warranty on fixtures. 1-year Limited Warranty on Remote Drivers.

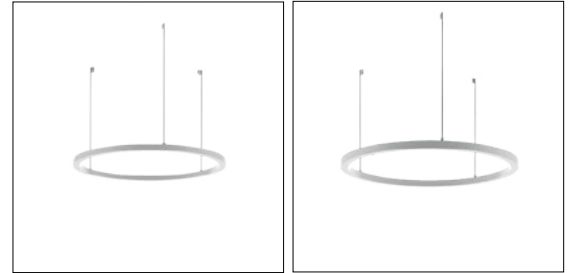

29.2" (37.5W)

35.9" (45W)

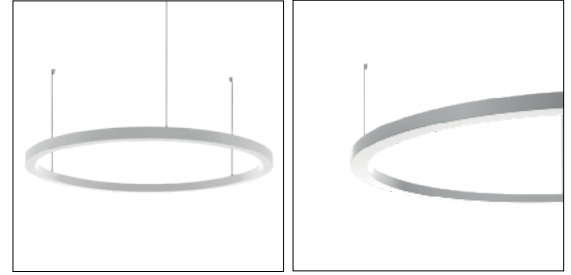

56.3" (70W)

96.5" (114W)

Delivered Lumens*	35.9"	29.1"	56.3"	96.5"
GE	2624	3181	4951	8357

*Values shown for 3000K

Ordering Information								
TOU		IND				GE		
Product	Trim/Finish	Type	Diameter/Size	Wattage/Operation	Color Temp	Optic	+	Remote Driver (Required) ¹
TOU = Tour	ROWH = Round White ROBL = Round Black ROBG = Round Brushed Gold ROBC = Round Brushed Copper	IND = Indirect Distribution (Up)	29 = 29.2"	38 CV = 37.5W / Remote Constant Voltage 24VDC	27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K	GE = General Illumination		Remote Driver:² E64575+OT96-D010 E64670+OT96-D010 E64189+OT96-D010 E64179+OT96-D010 Driver in Canopy: E64578 E65142 E64039 E64038 E64066 E64067 E64069 E64068
			36 = 35.9"	45 CV = 45W / Remote Constant Voltage 24VDC				
			56 = 56.3"	70 CV = 70W / Remote Constant Voltage 24VDC				
			97 = 96.5"	114 CV = 114W / Remote Constant Voltage 24VDC				


¹ See page 2

² 96.5" fixture requires two 3-cone kits and two remote drivers


Tour Pendant Round Indirect

Emissions range

Tour comes with four different emissions: direct, indirect, inside and direct-indirect. Four lighting effects that can be combined with each other in countless combinations to transform the environments with a minimal and contemporary light.

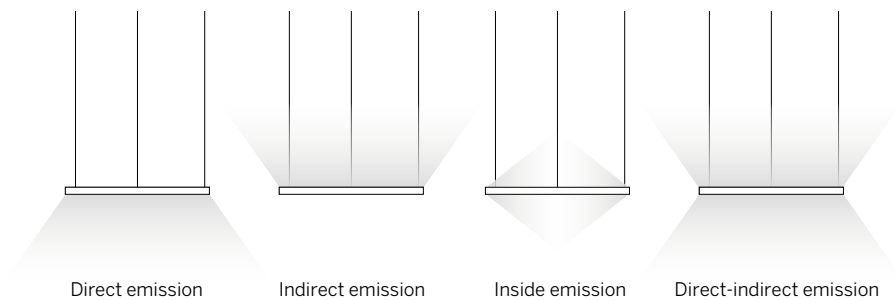

3-cone fixing kit (Remote Driver)



type

White	E64575
Black	E64670

Gold	E64189
Copper	E64179


Note: 96.5"Ø requires two fixing kits with 3-cones each

OT96-D010



Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

Note: 96.5"Ø requires two drivers

Final result

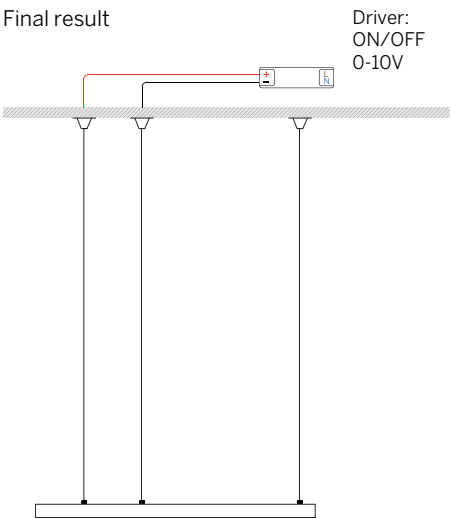


3-coupling point ceiling canopy for one-side emission (Integral 0-10V dimming driver in canopy)

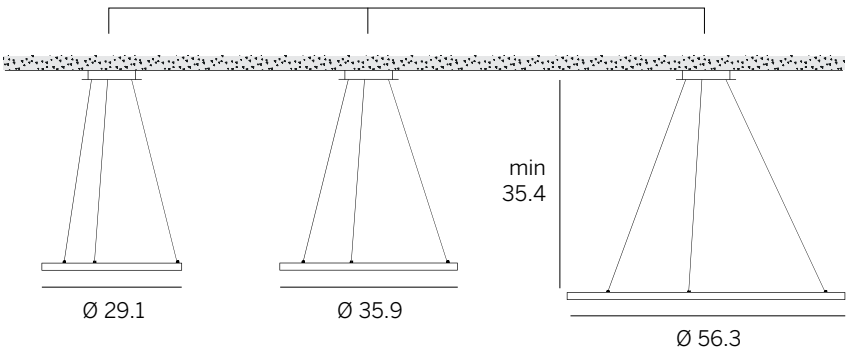

White	E64578
Black	E65142
Gold	E64039
Copper	E64038


Tour Pendant Round Indirect

6-point coupling ceiling canopy for 96.5 inch diam. one-side emission (Integral 0-10V dimming driver in canopy)

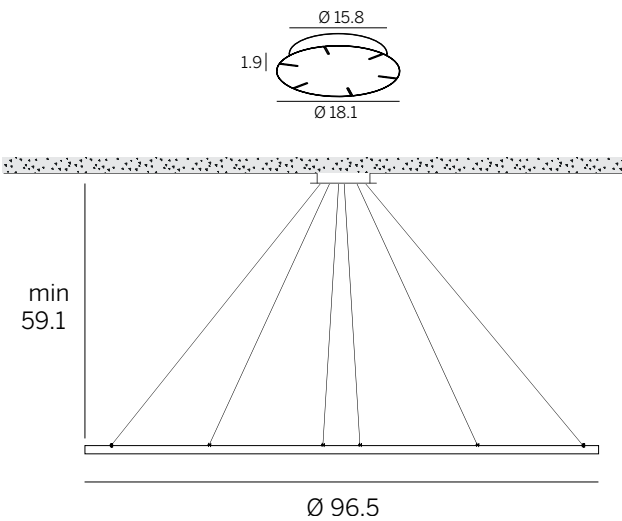


White	E64066
Black	E64067
Gold	E64069
Copper	E64068


29.2" (37.5W)



35.9" (45W)



56.3" (70W)



96.5" (114W)

