


ProTools 60 Linear Direct-Indirect Wall – Mullion Mount




INSIDE CORNER (PI) WG-60PTLDI-SW-PI-...-RML

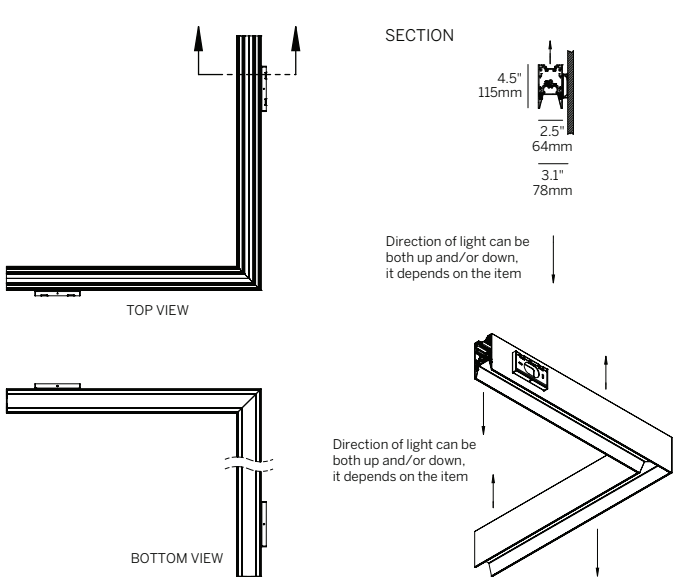


Minimum Angle 45°
Maximum Angle 180°

OUTSIDE CORNER (PO) WG-60PTLDI-SW-PO-...-RML

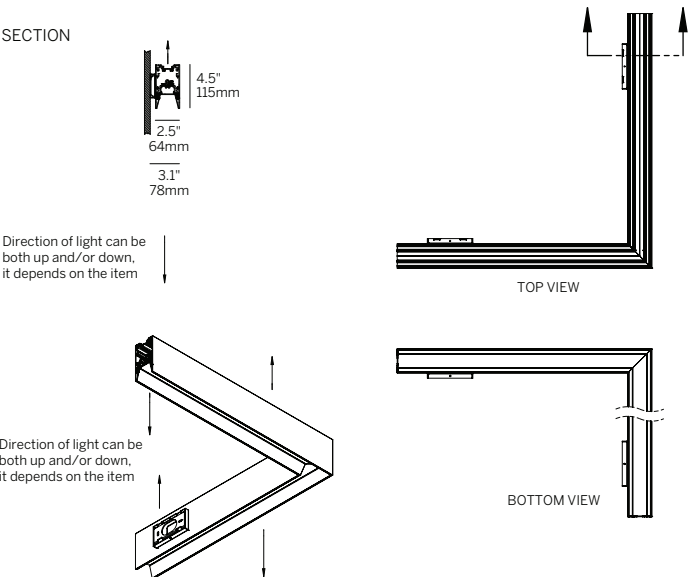


INSIDE CORNER (PI) WG-60PTLDI-SW-PI-...-ROL

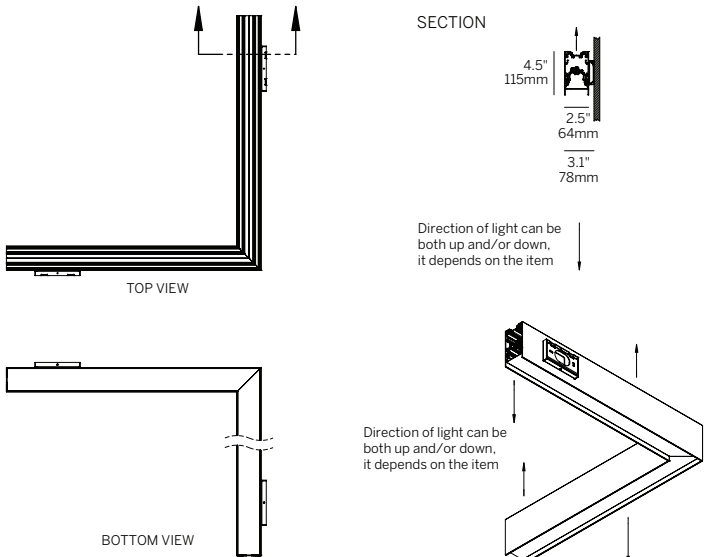

Minimum Angle 45°
Maximum Angle 180°

OUTSIDE CORNER (PO) WG-60PTLDI-SW-PO-...-ROL

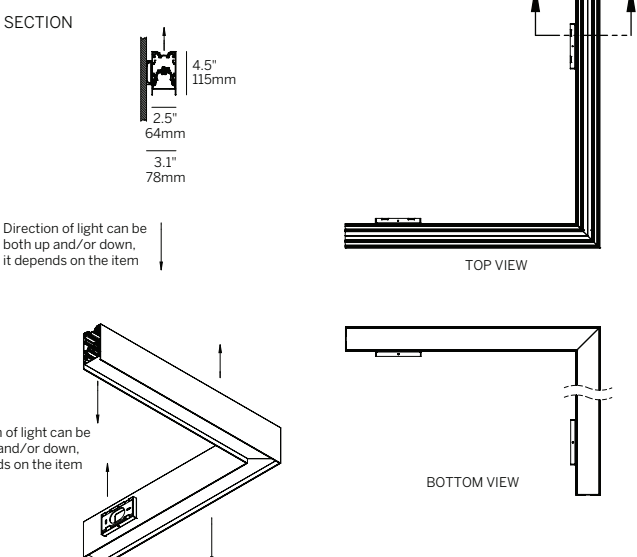


ProTools 60 Linear Direct-Indirect Wall – Mullion Mount



INSIDE CORNER (PI)


WG-60PTLDI-SW-PI-...-RLW/RLB

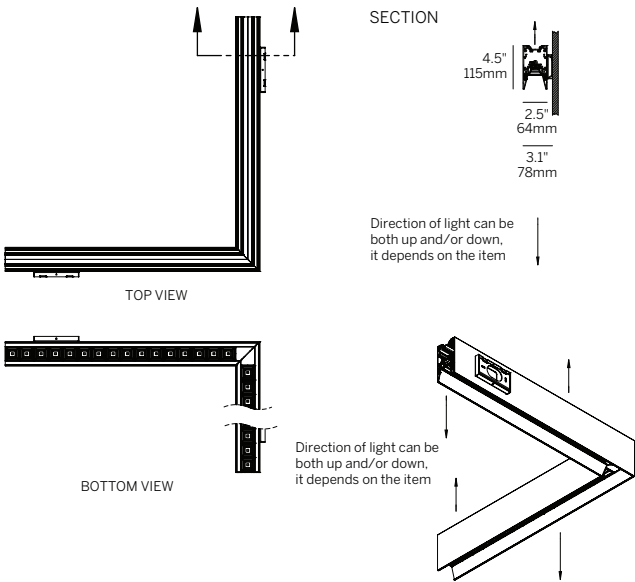

Minimum Angle 45°
Maximum Angle 180°


OUTSIDE CORNER (PO)

WG-60PTLDI-SW-PO-...-RLW/RLB

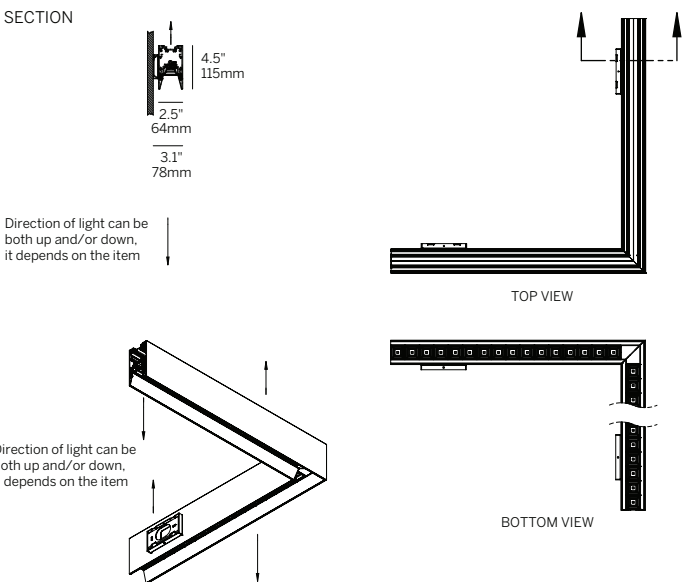

INSIDE CORNER (PI)


WG-60PTLDI-SW-PI-...-REO

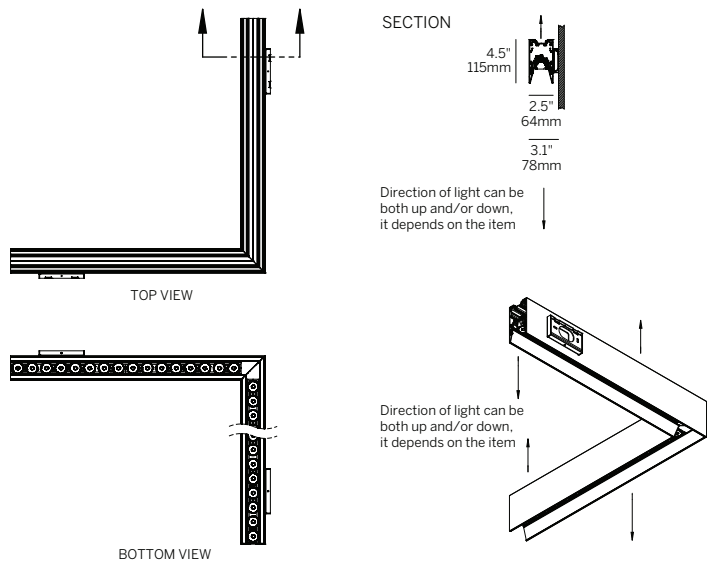

Minimum Angle 45°
Maximum Angle 180°

OUTSIDE CORNER (PO)


WG-60PTLDI-SW-PO-...-REO

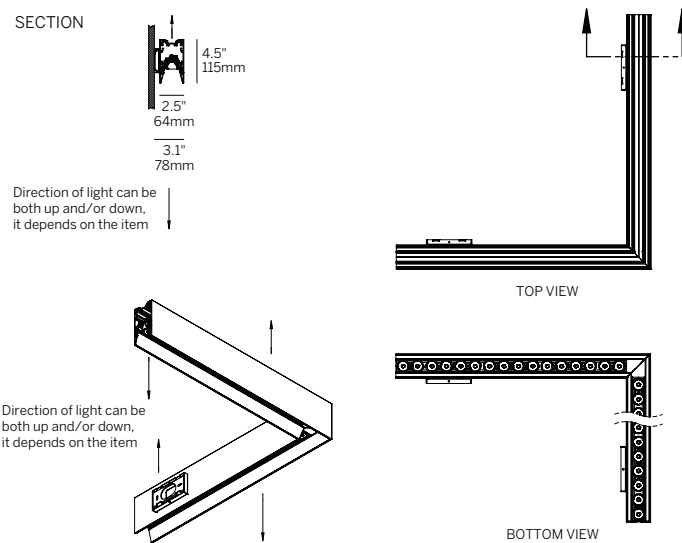


ProTools 60 Linear Direct-Indirect Wall – Mullion Mount



CORNER + STRAIGHT RUN CONNECTIONS

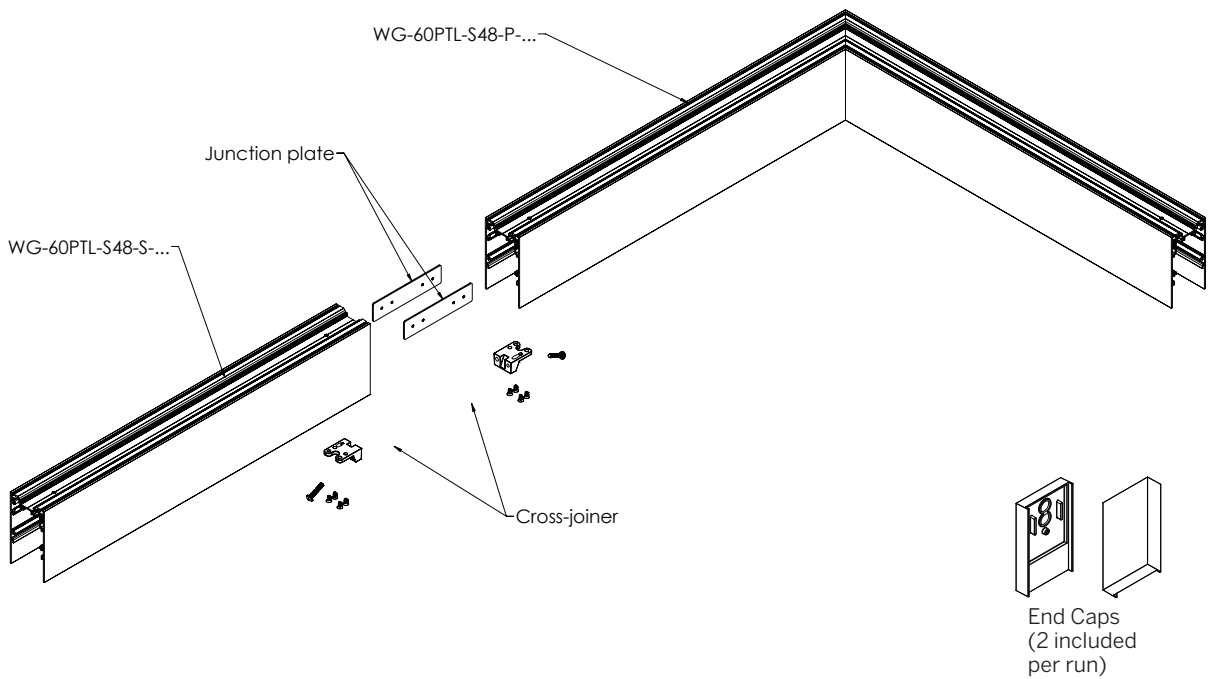


END WALL BRACKET

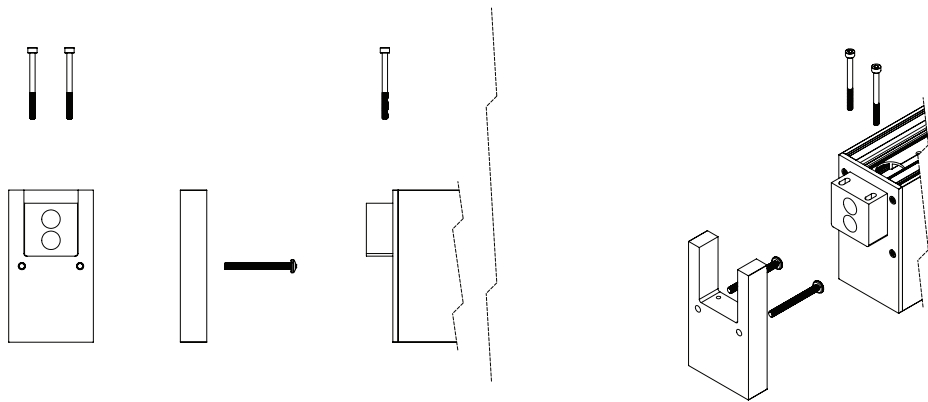


ProTools 60 Linear Direct-Indirect Wall – Mullion Mount




PROFILE DIMENSIONS

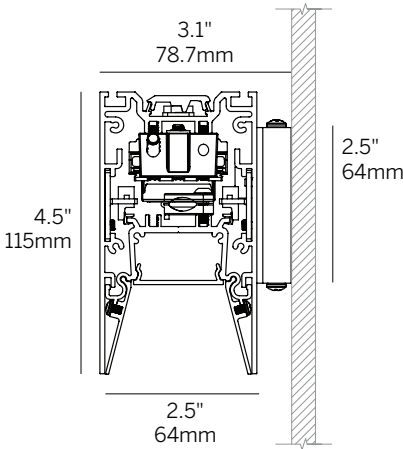


LENS / LOUVER DIMENSIONS




Recessed Micro-prismatic Lens (RML)



Recessed Louver (RLW, RLB)



Regressed Opal Lens (ROL)




Recessed Elliptical Optic (REO)

ProTools 60 Linear Direct-Indirect Wall – Mullion Mount




FILLER PLATE STRAIGHT RUN / LOUVER

- RLW, RLB, RNO and REO Optics are available in 6" increments. If the required fixture length should exceed that increment, the over length will be taken up by a Filler Plate in equal lengths on both ends of the fixture run.
- The Filler Plate is recessed and finished to match the louver and minimize visual impact.

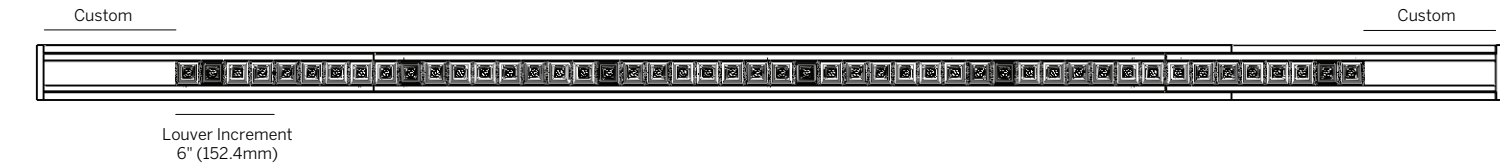

FILLER PLATE CORNER CONFIGURATION / LOUVER

- Corners will have a 2.5"x2.5" Corner Filler Plate, recessed and finished to match the louver.
- RLW, RLB, RNO and REO Optics are available in 6" increments. If the required fixture length should exceed that increment, the over length will be taken up by a Filler Plate in equal lengths on both ends of the fixture run.
- The Filler Plate has a maximum length of 3" and is recessed and finished to match the louver and minimize visual impact.

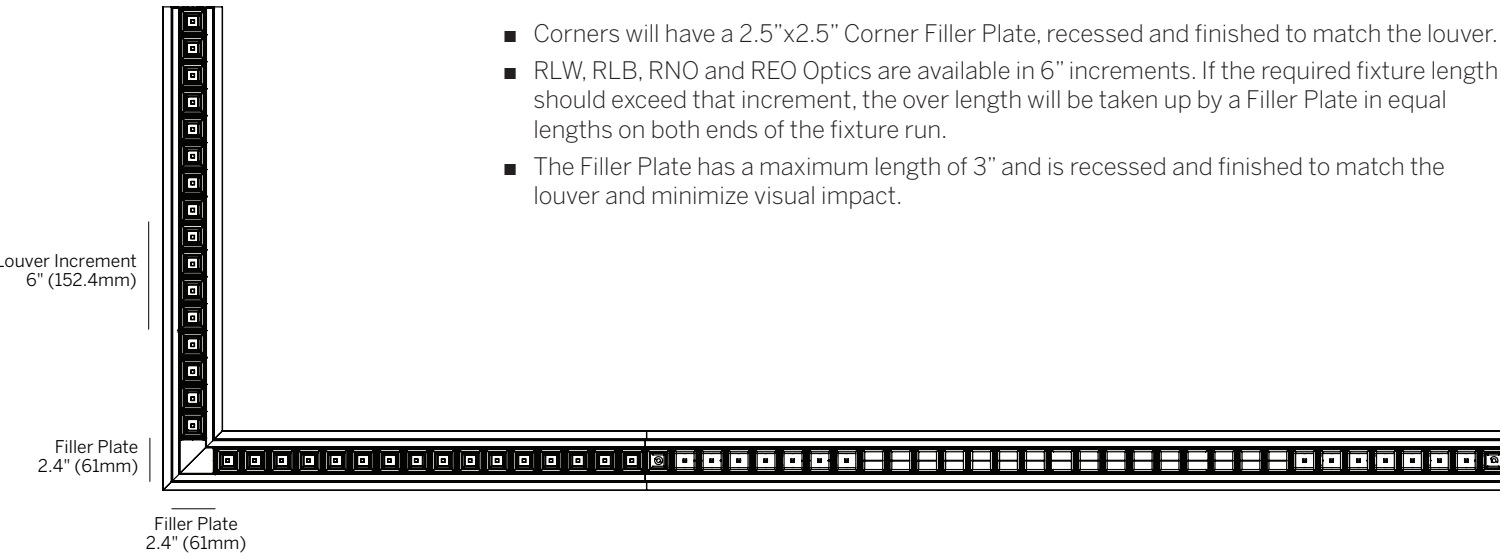

ProTools 60 Linear Direct-Indirect Wall – Mullion Mount

inter•lux

FILLER PLATE MULTI-CORNER / LOUVER

