
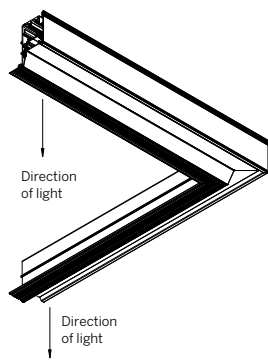




PLASTER TRIM

INSIDE CORNER (PI)





WG-60PTLP-RPT-PI-RML

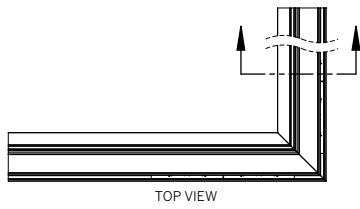

Minimum Angle 45°
Maximum Angle 180°





OUTSIDE CORNER (PO)

WG-60PTLP-RPT-PO-RML

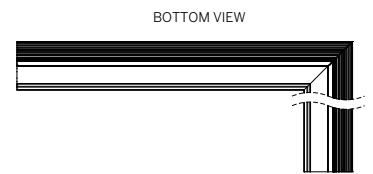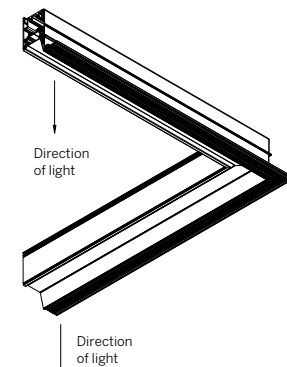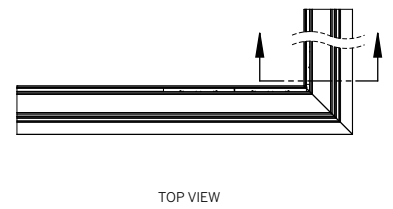

INSIDE CORNER (PI)





WG-60PTLP-RPT-PI-ROL

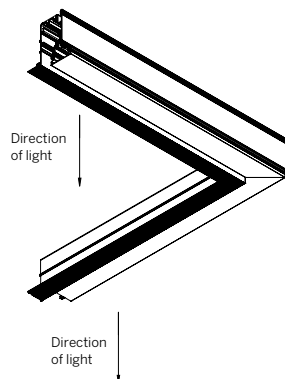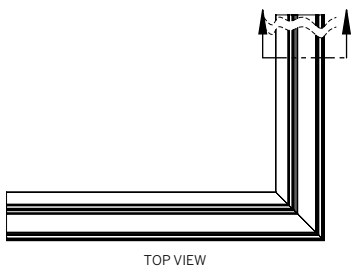

Minimum Angle 45°
Maximum Angle 180°

OUTSIDE CORNER (PO)

WG-60PTLP-RPT-PO-ROL

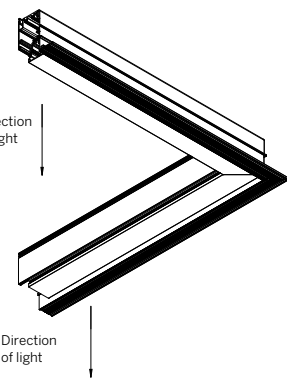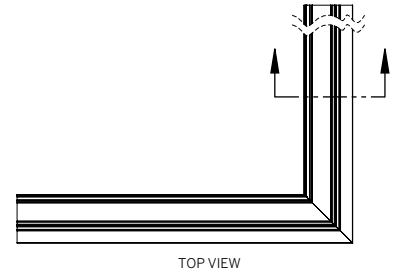

ProTools 60 Linear Perimeter




PLASTER TRIM

INSIDE CORNER (PI)



WG-60PTLP-RPT-PI-RLW/RLB



TOP VIEW



BOTTOM VIEW






Minimum Angle 45°
Maximum Angle 180°

OUTSIDE CORNER (PO)



WG-60PTLP-RPT-PO-RLW/RLB



TOP VIEW

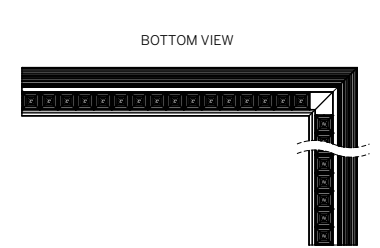


BOTTOM VIEW






INSIDE CORNER (PI)



WG-60PTLP-RPT-PI-REO



TOP VIEW



BOTTOM VIEW






Minimum Angle 45°
Maximum Angle 180°

OUTSIDE CORNER (PO)



WG-60PTLP-RPT-PO-REO



TOP VIEW

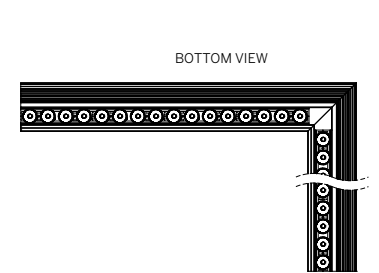





BOTTOM VIEW



BEZEL TRIM / GRID TRIM





INSIDE CORNER (PI)

WG-60PTLP-[RBT / RGT9 / RGT15]-PI-RML

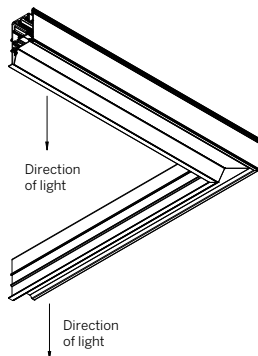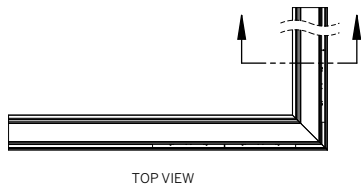

OUTSIDE CORNER (PO)





WG-60PTLP-[RBT / RGT9 / RGT15]-PO-RML

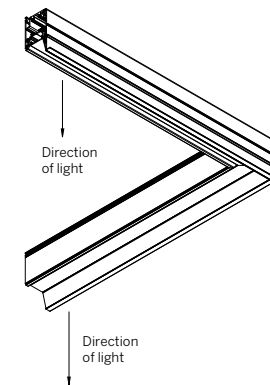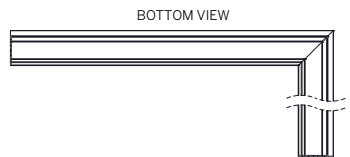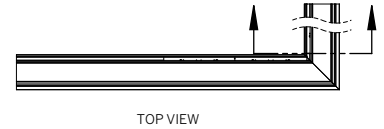

Minimum Angle 45°
Maximum Angle 180°





INSIDE CORNER (PI)

WG-60PTLP-[RBT / RGT9 / RGT15]-PI-ROL

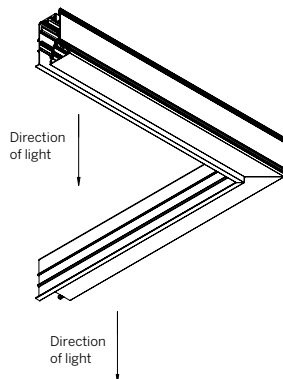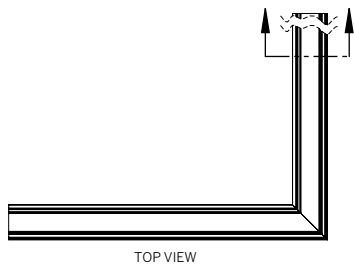

OUTSIDE CORNER (PO)

WG-60PTLWG-[RBT / RGT9 / RGT15]-PO-ROL

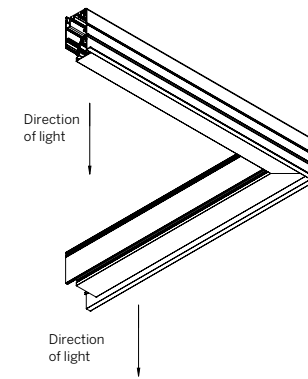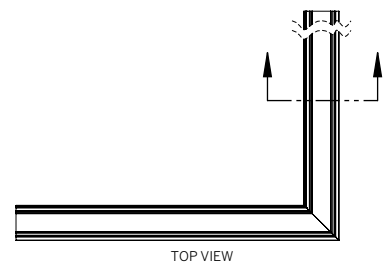

Minimum Angle 45°
Maximum Angle 180°









BEZEL TRIM / GRID TRIM

INSIDE CORNER (PI)

WG-60PTLP-[RBT / RGT9 / RGT15]-PI-RLW/RLB

OUTSIDE CORNER (PO)

WG-60PTLWG-[RBT / RGT9 / RGT15]-PO-RLW/RLB

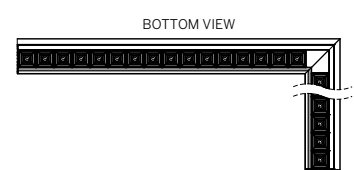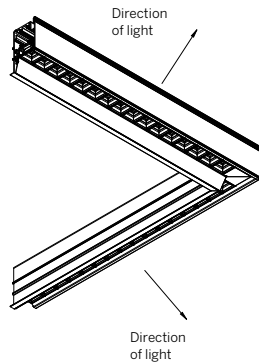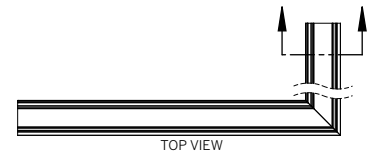









Minimum Angle 45°
Maximum Angle 180°

INSIDE CORNER (PI)

WG-60PTLP-[RBT / RGT9 / RGT15]-PI-REO


OUTSIDE CORNER (PO)

WG-60PTLP-[RBT / RGT9 / RGT15]-PO-REO

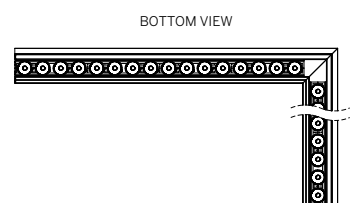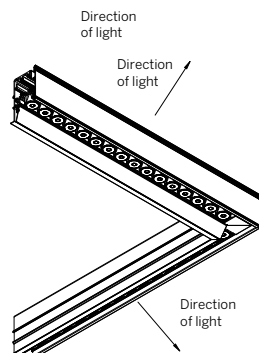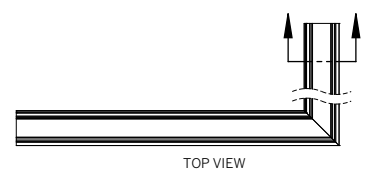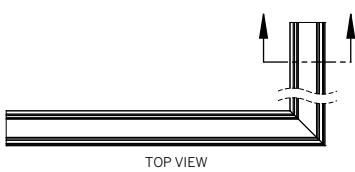


Minimum Angle 45°
Maximum Angle 180°


CORNER + STRAIGHT RUN CONNECTIONS

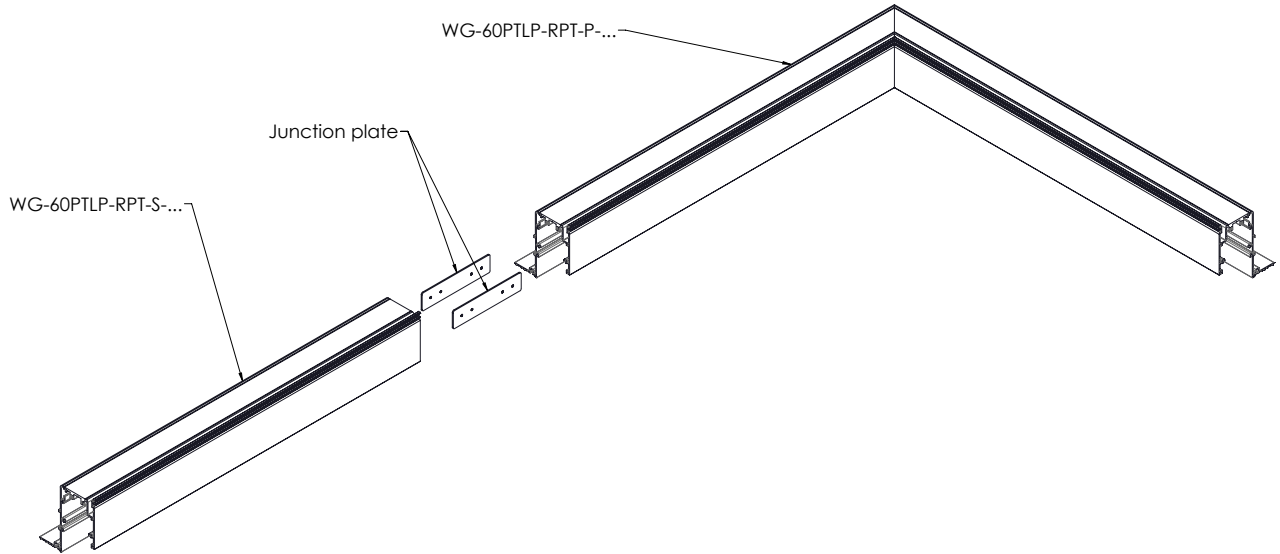


PROFILE DIMENSIONS

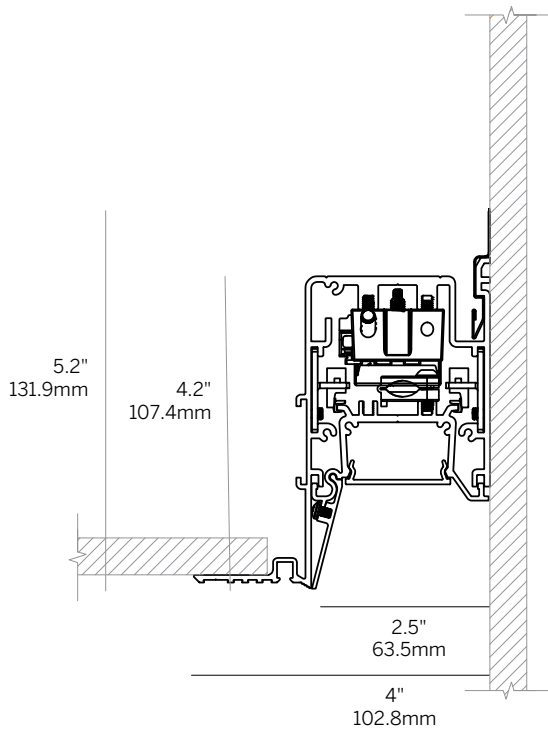


Recessed Plaster Trim (RPT)

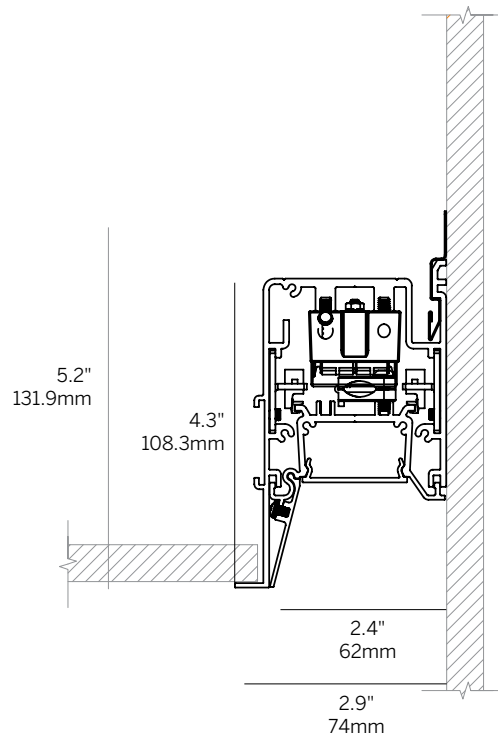

Recessed Bezel Trim (RBT)

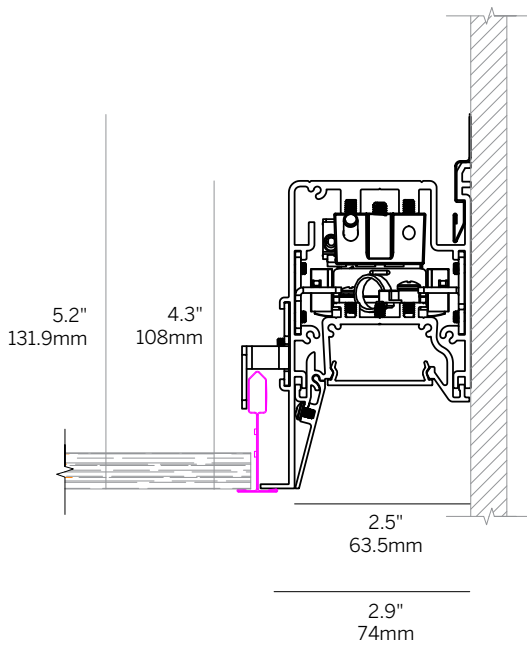


Recessed Grid Trim 9/16 (RGT9) / 15/16 (RGT15)

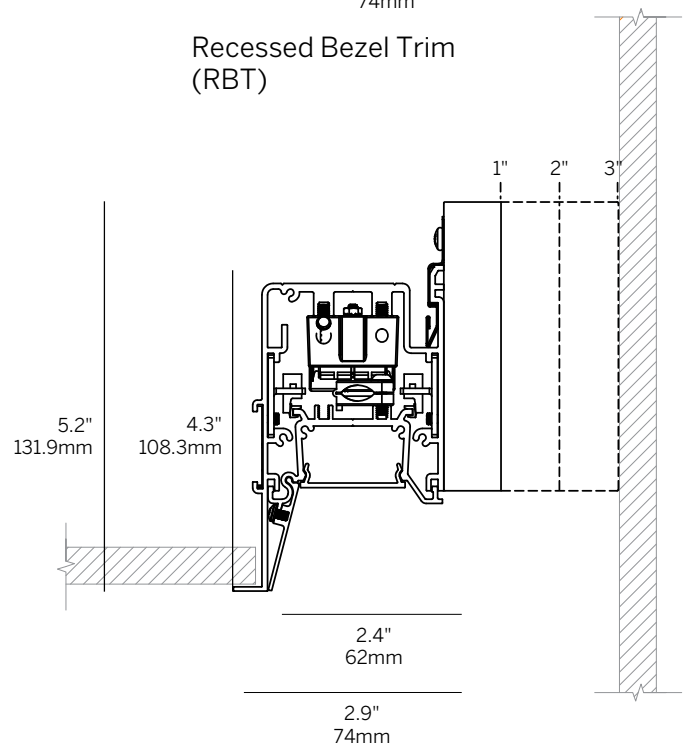


Soft Graze: 1" 2" 3" (SG1, SG2, SG3)


LENS / LOUVER DIMENSIONS

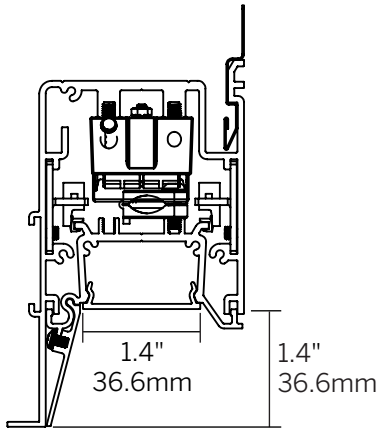


Recessed Micro-Prismatic Lens (RML)

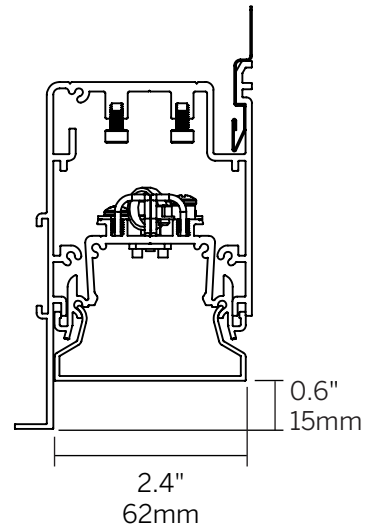

Regressed Opal Lens (ROL)
(NA with Soft Graze)

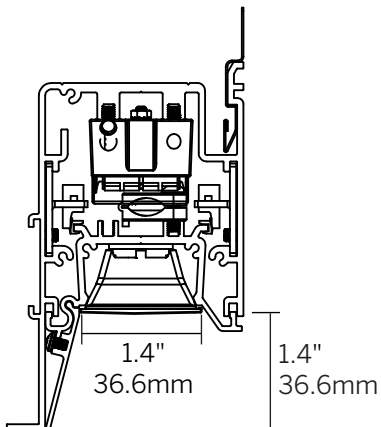


Recessed Louver Black (RLB)
Recessed Louver White (RLW)

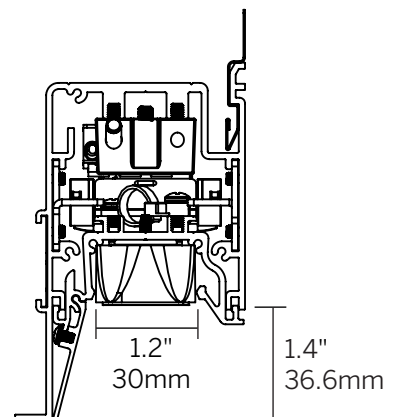

Recessed Elliptical Optic (REO)


FILLER PLATE STRAIGHT RUN / LOUVER

- RLW, RLB, RNO and REO Optics are available in 6" increments. If the required fixture length should exceed that increment, the over length will be taken up by a Filler Plate in equal lengths on both ends of the fixture run.
- The Filler Plate is recessed and finished to match the louver and minimize visual impact.

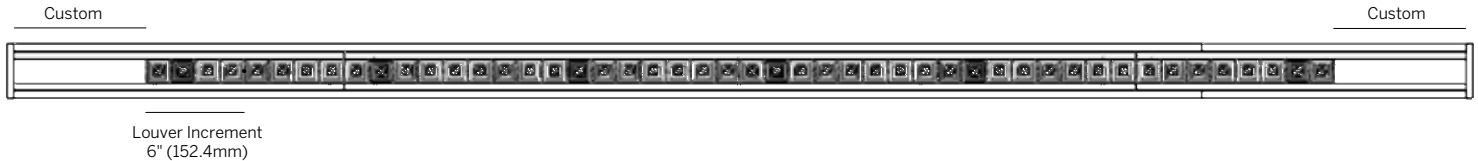

FILLER PLATE CORNER CONFIGURATION / LOUVER

- Corners will have a 2.5"x2.5" Corner Filler Plate, recessed and finished to match the louver.
- RLW, RLB, RNO and REO Optics are available in 6" increments. If the required fixture length should exceed that increment, the over length will be taken up by a Filler Plate in equal lengths on both ends of the fixture run.
- The Filler Plate has a maximum length of 3" and is recessed and finished to match the louver and minimize visual impact.

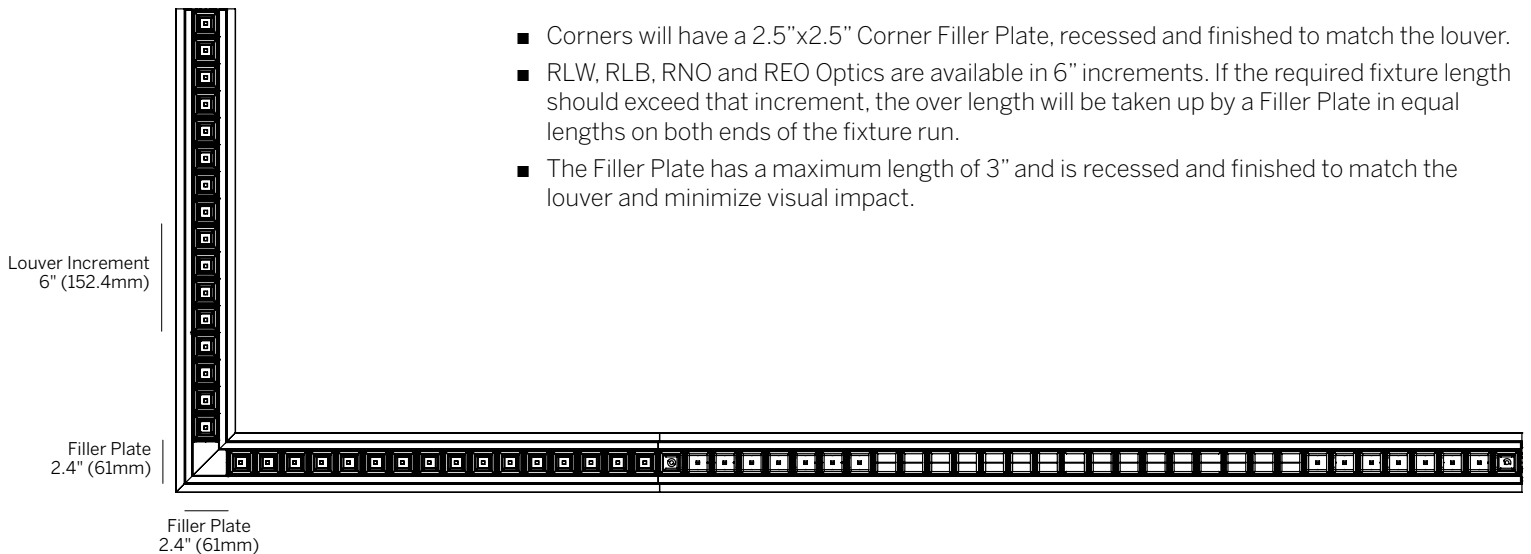

FILLER PLATE MULTI-CORNER / LOUVER

- Corners will have a 2.4"x2.4" Corner Filler Plate recessed and finished to match the louver.
- RLW, RLB, RNO and REO Optics are available in 6" increments. If the required fixture length should exceed that increment, the over length will be taken up by a Filler Plate in equal lengths on both ends of the fixture run.
- The Filler Plate is recessed and finished to match the louver and minimize visual impact.

