


## 3" ProTools Adjustable Square Recessed



3" square aperture recessed adjustable downlight with 1.6" diameter regressed light aperture.

Tilt 40°, rotation 360° (continuous).

<b>Housing</b>	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless Quick-screw spring mounting mechanism EZ-Click Cover installation Trimless housing with Multiple Luminaire Configurations feature allows endless multiple combinations without specialized housings
<b>Covers</b>	SRC - Square Recessed Cone for low brightness, general illumination with angled cone SRPH - Square Regressed Pinhole for low brightness, general illumination with regressed aperture (12° and 25° only)
<b>LED</b>	Constant Current, 92+ CRI, 2-Step MacAdam (12° Beam 3-Step) Low/Mid/High output choices (delivers up to 68 lumens per watt) 2700K, 3000K, 3500K, 4000K L70 (TM21 Projected 85°C) Static White 66,500 hours (12° Beam 109,000 hours)
<b>Beam</b>	12°, 25°, 36° beam spreads
<b>Driver</b>	Integral and remote drivers for all Dimming and non-Dimming applications Non-Dim, 0-10V, Phase, Lutron and DALI driver options Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
<b>Installation Housing</b>	Not required when using the Driver Enclosure LP - Landing Pan NC - New Construction IC - Insulated Ceiling CP - Chicago Plenum
<b>Warranty</b>	5-year Limited (see complete company warranty information)
<b>Certifications</b>	ETL and ETL-C for dry and damp location (WL Wet Location optional), CE

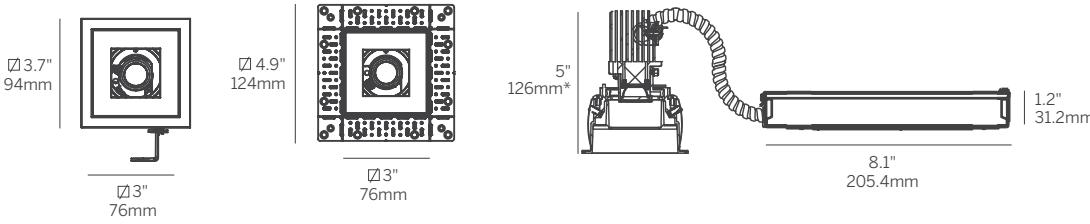

\*Minimum of 5" (126mm) ceiling void is required to install the integral driver from below the ceiling.



RBT / SRC / OA



RPT / SRD / MPO



RBT / SRPH / OA



RPT / SRPH / RSC

## 3" ProTools Adjustable Square Recessed

Model	Fixation	Power <sup>1</sup>	CRI	CCT <sup>2</sup>	Driver <sup>3</sup>	Cover	Lens	Beam	Trim Finish	Cover Finish	Housing <sup>4</sup>	Options
WG-75SPTA	RBT RPT	L M H	92	27 30 35 40	S010 D010 SPH PEQ0 D2S RS010 RD010 RD2S X	SRC SRPH	OA RSC	12 25 36	W B S F	W B S F	LP NC IC CP X	WL MLC AS ASL HL EM AWNRF

### Model

- WG-75SPTA = 3" ProTools Adjustable Square Recessed

### Fixation

- RBT = Recessed Bezel Trim
- RPT = Recessed Plaster Trim

### Power<sup>1</sup>

- L = Low Power, 5.6W @ 350mA (3.9W for 12°)
- M = Mid Power, 8.1W @ 500mA (5.8W for 12°)
- H = High Power, 11.5W @ 700mA (8.3W for 12°)

### CRI

- 92 = 92+ CRI

### CCT<sup>2</sup>

- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K

### Integral Driver<sup>3</sup>

- S010 = eldoLED 0-10V 1% Dimming, 120-277V (22W)
- D010 = eldoLED 0-10V 0.1% Dimming, 120-277V (22W)
- SPH = Phase (2-wire) 3% Dimming, 120V only (20W)
- PEQ0 = Lutron Hi-Lume Premier 0.1% EcoSystem Dimming, 120-277V (20W)
- D2S = DALI-2 (DT6) for Static White 0.1% Dimming, 120-277V (22W)

### Remote Driver<sup>3</sup>

- RS010 = Remote eldoLED 0-10V 1% Dimming, 120-277V (22W, 50W or 100W)
- RD010 = Remote eldoLED 0-10V 0.1% Dimming, 120-277V (22W, 50W or 100W)
- RD2S = Remote DALI-2 (DT6) for Static White 0.1% Dimming, 120-277V (22W, 50W or 100W)
- X = No Driver

### Cover

- SRC = Square Recessed Cone
- SRPH = Square Regressed Pinhole (N/A with 36° Beam)

### Lens

- OA = Open Aperture
- RSC = Recessed Satin Clear Lens

### Beam

- 12 = 12° Beam Angle
- 25 = 25° Beam Angle
- 36 = 36° Beam Angle

### Trim Finish

- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finish, specify RAL code

### Cover Finish

- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finish, specify RAL code

### Housing (optional)<sup>4</sup>

- LP = Landing Pan
- NC = New Construction Housing
- IC = Insulated Ceiling Housing
- CP = Chicago Plenum Housing
- X = No Housing

### Options

- WL = Wet Location (only available with SRC)
- MLC = Multiple Luminaire Configurations (RPT only - see detail page)
- AS = Aim Stick
- ASL = Aim Stick w/ Laser
- HL = Honeycomb Louver (specify with OA)
- EM = Emergency (remote only)
- AWNRF = Lutron Athena Wireless Node RF (RS010, RD010, RD2S drivers only)

Whitegoods reserves the right to change any information without prior notice.

### Notes

- 1 Wattage shown does not include power supplies/drivers.
- 2 Refer to photometric data sheet for delivered lumens.
- 3 See driver information for details.
- 4 See housings pages for details

