




ProTools 60 Linear Studio Downlight

Suspended / Surface Mount

- Linear solution for environments that require precise light distribution and no glare
- 45 degree internal louvers and adjustable baffle to finely control beam and cut-off
- Individual fixtures in standard and tailored lengths in suspended or surface mount
- Flicker-free full range dimming with standard driver (eldoLED)
- Manufactured in the USA



| | |
|----------------|--|
| Housing | Precision extruded aluminum for true dimensions and tolerances Toolless component assembly from below Field adjustable suspension height and position Perfect fit with inserts, louvers and baffles Standard and tailored lengths Finish: matte black |
| Integration | Ceiling canopy mounts to any ceiling surface |
| Distribution | 45 degree louver with adjustable baffles |
| LED | Static White, 2700K - 6500K, 3 W - 10W/ft, constant current, >90 CRI, 3-Step MacAdam L70 (TM21 Projected 85°C) Static White = 60,000 hours |
| Optic | LL45B - linear louver black extreme cutoff |
| Reflector | Black: no brightness Adjustable baffles |
| Driver | Integral Eldoled 0.1% dimming |
| Connectivity | Lutron Athena Wireless Node RF Casambi BlueTooth |
| Weight | 5lbs per foot |
| Operating Temp | Suitable for operation in maximum ambient temperature of 35C (95F) |
| Warranty | 5-year Limited (see complete company warranty information) |
| Certifications | ETL and ETL-C for dry and damp location, CE, Chicago plenum |
| Voltages | 120-277VAC |

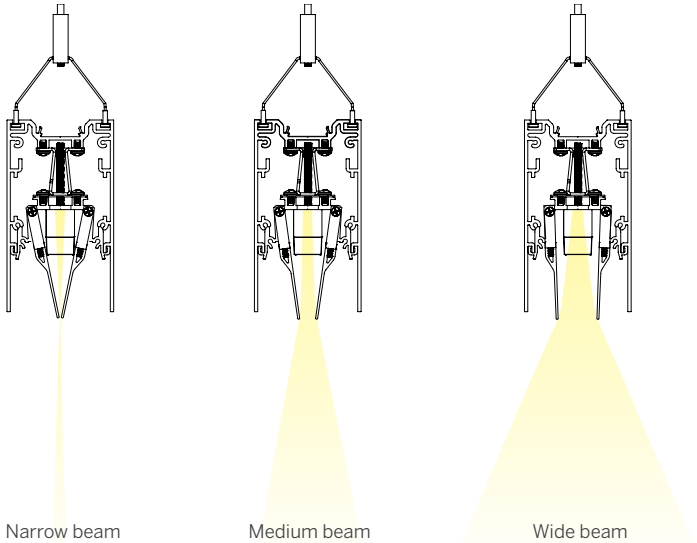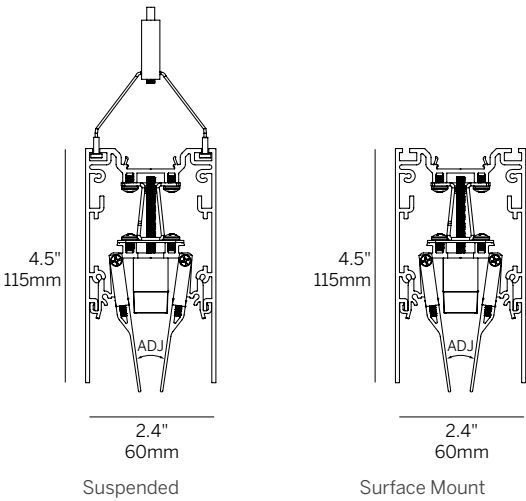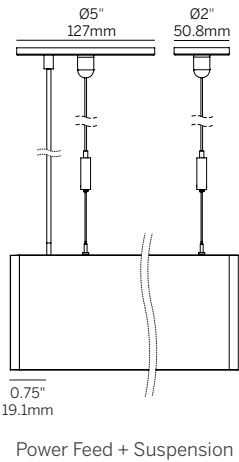

ProTools 60 Linear Studio Downlight

Suspended / Surface Mount

| Model | Fixation | Pattern | Length | CRI/CCT | Optic | Beam | Power¹ | Driver² | Housing Finish | Reflector Finish | Options |
|-------------|-------------------------|---------|----------------------|---------------------------------|-------|------|----------------|-------------------|----------------|------------------|-------------------|
| WG-60PTL-ST | S48 S96 SXX SM | S | 48 72 96 XX | 927 930 935 940 965 | LL45B | ADJ | P1 P2 P3 | E1 L1 D2DT6 | B | B | AWNRF BT EM |

- Model**
- WG-60PTL-ST = ProTools 60 Linear Studio Downlight Suspended / Surface Mount
- Fixation**
- Power suspension w/5" canopy standard. Black non-feed suspensions provided with 2" canopy.
- S48 = 48" suspension cable
 - S96 = 96" suspension cable
 - SXX = Specify suspension cable length to nearest 0.25"
 - SM = Surface Mount
- Pattern**
- S = Straight run
- Length**
- 48 = 48"
 - 72 = 72"
 - 96 = 96"
 - XX = Specify in 0.5" increments
- CRI/CCT (90+ CRI)**
- 927 = 2700K
 - 930 = 3000K
 - 935 = 3500K
 - 940 = 4000K
 - 965 = 6500K
- Optic**
- LL45B = Linear louver black
- Beam**
- ADJ = Adjustable baffles
- Power¹**
- P1 = 3W/ft
 - P2 = 6W/ft
 - P3 = 10W/ft
- Driver²**
- E1 = eldoLED 0.1% dimming, 0-10V (120-277V)
 - L1 = Lutron 1% dimming, EcoSystem (120-277V)
 - D2DT6 = DALI-2 (DT6), 0.1% dimming (120-277V)
- Housing Finish**
- B = Black, 15% gloss, RAL 9005 (standard)
- Reflector Finish**
- B = Black, 15% gloss, RAL 9005 (standard)
- Options**
- AWNRF = Lutron Athena Wireless Node RF (specify with E1 or D2DT6)
 - BT = Wireless CAS – Casambi (specify with E1 or D2DT6)
 - EM = Emergency (remote)

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Refer to specsheet for delivered lumen data for all product configurations.
 - 2 See power supply page for details.

