



General: Archiline is a family of high-output, low glare linear LED in-grade and wall fixtures suitable to illuminate outdoor architectural elements such as facades, columns, landscape, and pathway lighting. The PRO version reaches up to 150', making it perfect for tall buildings and towers. Available in Frameless (Drive-Over), Aluminum or Stainless-Steel frame, with a broad range of optics, from Narrow Spot to Asymmetric Wall Washer and Elliptic. Its unique Dark Light (anti-glare) system provides a must-see quiet illumination, while losing almost no output.

Fixture Body: Corrosion resistant 6060 Aluminum, Anodized (20 µm), Aluminum finish

Trim: Frameless, ideal for continuous runs. Extra clear glass - Tempered

Mounting: 316 Marine Grade Steel adjustable bracket.

Dimensions/Weight: 12.6" (2.43 lbs) – 24.4" (4.4 lbs) – 36.2" (6.61 lbs) – 48" (7.72 lbs) – 59.8" (9.26 lbs)

Driver: Integral 120-277V 1% (logarithmic curve) 0-10V dimming, or Non-Dim.

Wattages: 14.5W (12.6") – 27W (24.4") – 41W (36.2") – 53.5W (48") – 65W (59.8")

Cable: Fixture comes with 0.66' of cable (Power cable required, ordered separately).

Safety features: Built-in Aquastop® (Anti-wicking) and TCS® (Over tension and electrical discharge protection) systems.

IP rating: IP67 for temporary flooding up to 3.28' depth for up to a maximum of 30 mins.

IK rating: IK 10

ETL Certification: ETL, wet location

Optics: Fixed or Adjustable. Available in Narrow Spot – Spot – Flood – Wide Flood – Elliptic, Asymmetric Wall Washer. Most Fixed variants are also available with Dark Light (Anti-glare) system.

Color temperatures: 2700K – 3000K – 3500K – 4000K.

CRI: 80+

Lumen Maintenance: L70 projections tested at Tj 65° C and Ta 25°.

Warranty: 5-year Limited Warranty on fixtures. 1-year Limited Warranty on Remote Drivers.



12.6" (14.5W)

24.4" (27W)

36.2" (41W)

48" (53.5W)

59.8" (65W)

Delivered Lumens (Open Beam)*	12.6"	24.4"	36.2"	48"	59.8"
Narrow Spot	1348	2471	3819	4943	5860
Spot	1048	2359	3376	4369	5243
Flood	974	2336	3290	4258	5109
Wide Flood	1085	2445	3418	4424	5310
Elliptic/Grazer	1009	2381	3285	4251	5101
Wall Washer	1174	2669	3432	4441	5329

*Values shown for 3000K

Delivered Lumens (DarkLight)*	12.6"	24.4"	36.2"	48"
Spot	762	1827	2327	3103
Flood	687	1721	2270	3026
Wide Flood	838	2064	2369	3159
Elliptical	792	2014	2508	3344

*Values shown for 3000K

Ordering Information

AR	W				ID				
Product	Mounting/Frame	Type	Length	Wattage	Operation	Color Temp	Optic	+	Cables ³
AR = Archiline	W = Wall	OB = Open Beam DL = DarkLight ¹	12 = 12.6"	15 = 14.5W	ID = Integral (0-10V dim)	27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K	NSP = Narrow Spot ² SP = Spot FL = Flood WFL = Wide Flood EL = Elliptic/Graze WW = Wall Washer ²	+	E99826 E99822 E99823 E99824 E99825
			24 = 24.4"	27 = 27W					
			36 = 36.2"	41 = 41W					
			48 = 48"	54 = 53.5W					
			60 = 59.8"	65 = 65W					


¹ NA for 59.8"

² Not available for DL


³ See page 2




12.6" 14.5W ID

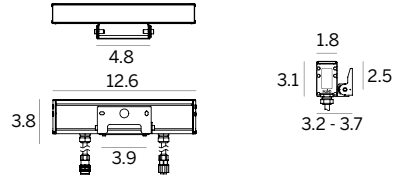


24.4" 27W ID

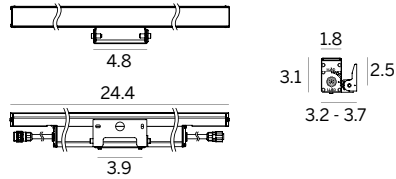


36.2" 41W ID

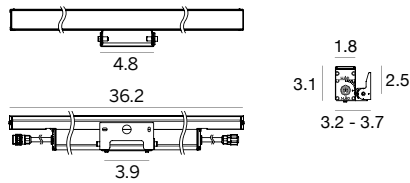

48" 53.5W ID

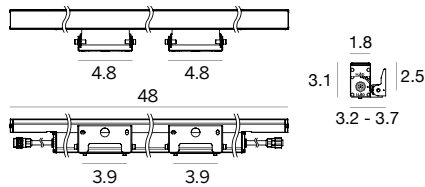

59.8" 65W ID

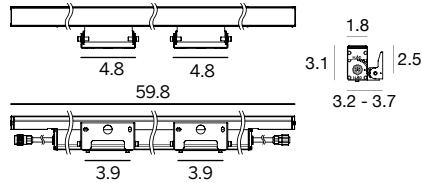

Cables 0-10V

E99826

39.4" power supply cable
+0-10V dimming
F 5 pin

E99822

196.9" power supply cable
+0-10V dimming
F 5 pin

E99823

39.4" extension cable for power
+0-10V dimming
M+F 5 pin

E99824

196.9" extension cable for power
+0-10V dimming
M+F 5 pin

E99825

393.7" extension cable for power
+0-10V dimming
M+F 5 pin