



## ProTools 60 Linear Perimeter Recessed

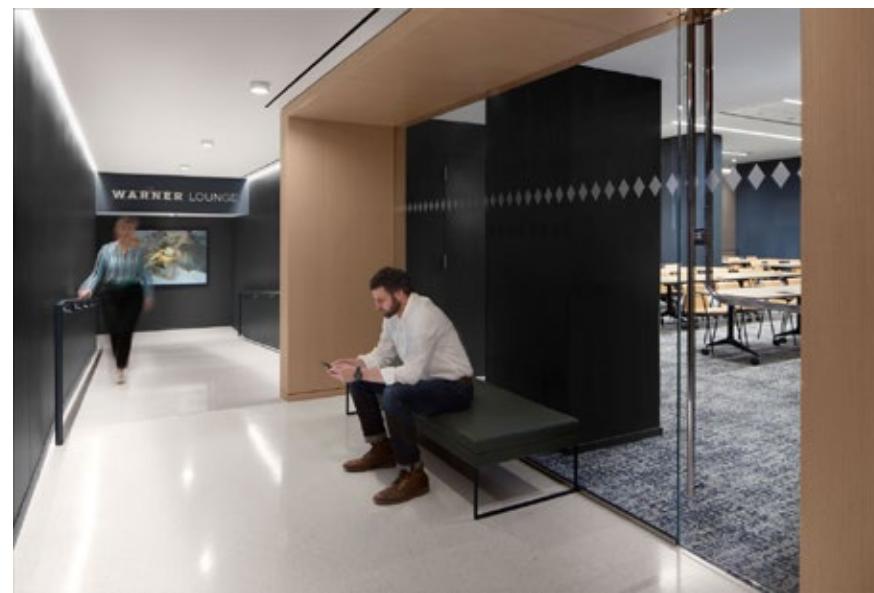


A continuous linear system that delivers even illumination to a wall from above the finished ceiling to illuminate a space and define vertical surfaces.

<b>Housing</b>	Precision extruded aluminum for true dimensions and tolerances Toolless component assembly from below Perfect fit with inserts, louvers and lenses Standard and tailored lengths including corner configurations Soft Gaze adds 1" - 3" additional set-off for less dramatic glaze Recessed snap-in cover for non-illuminated section Finishes: white, black, silver and custom
<b>Integration</b>	Fixation into gypsum, hard ceilings and all grid ceiling types Finished wall continues past the ceiling line
<b>Distribution</b>	Evenly illuminated regressed, recessed lens or Soft Gaze
<b>LED</b>	Static White, 2700K - 4000K, 3 W - 15 W/ft, constant current, >90 CRI, 3-Step MacAdam Tunable White, 1800K - 4000K / 2700K - 6500K, 3 W - 15 W/ft, constant current, >90 CRI L70 (TM21 Projected 85°C) Static White / Tunable White = 50,000 hours
<b>Optic</b>	RML - recessed micro-prismatic lens   diffusion with maximum efficiency RSL - recessed satin opal lens   diffused illumination with a clean, flush appearance ROL - Regressed opal lens   diffused light with reduced glare FOL - Flush opal lens   diffused illumination even the ceiling
<b>Reflector</b>	White: high efficiency (standard with RLW) Black: no brightness (standard with RLB) Silver: low brightness All 15% gloss Custom finish available
<b>Driver</b>	Compatible with quality constant current drivers
<b>Connectivity</b>	Lutron Athena Wireless Node RF Casambi BlueTooth
<b>Weight</b>	4lbs per foot
<b>Operating Temp</b>	Suitable for operation in maximum ambient temperature of 35C (95F)
<b>Warranty</b>	5-year Limited (see complete company warranty information)
<b>Certifications</b>	ETL and ETL-C for dry and damp location, CE, Chicago plenum
<b>Voltages</b>	120-277VAC

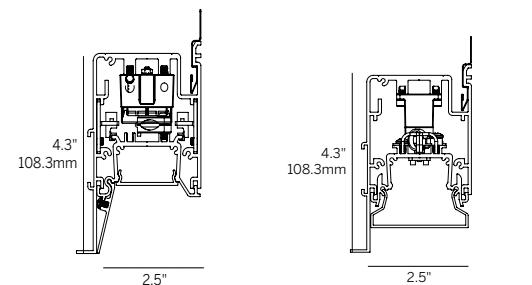

Recessed Micro-prismatic Lens (RML) / Recessed Satin Opal Lens (RSL)

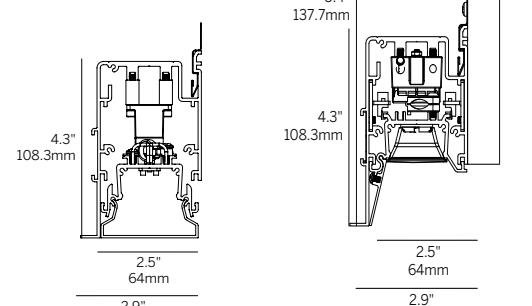

Regressed opal lens (ROL)

Flush opal lens (FOL)



Flush opal lens (FOL)



Soft Gaze: 1" 2" 3" (SG1, SG2, SG3)

## ProTools 60 Linear Perimeter Recessed

Model	Fixation	Pattern	Length <sup>2</sup>	CRI/CCT	Optic	Beam	Power <sup>5</sup>	Driver <sup>6</sup>	Housing Finish	Reflector Finish	Options
WG-60PTLP	RPT	S	24	927	RML	80	P1	E1	W (std)	W (std)	AWNRF
WG-60PTLPSG1	RBT	PI <sup>1</sup>	48	930	RSL	P2	L1	B	B	BT	CP
WG-60PTLPSG2	RGT9	PO <sup>1</sup>	96	935	ROL	P3	D2DT6	S	S	EM	NYC
WG-60PTLPSG3	RGT15	XX <sup>3</sup>	XX <sup>3</sup>	940	FOL	105	D2DT8	F	F	TF	
				TW1840 <sup>4</sup>		P4					
				TW2765 <sup>4</sup>							

### Model

- WG-60PTLP = ProTools 60 Linear Perimeter
- WG-60PTLPSG1 = ProTools 60 Linear Perimeter Soft Gaze 1" extension
- WG-60PTLPSG2 = ProTools 60 Linear Perimeter Soft Gaze 2" extension
- WG-60PTLPSG3 = ProTools 60 Linear Perimeter Soft Gaze 3" extension

### Fixation

- RPT = Recessed plaster trim
- RBT = Recessed trim for hard ceiling
- RGT9 = Recessed trim for 9/16" grid
- RGT15 = Recessed trim for 15/16" grid

### Pattern

- S = Straight run
- PI = Standard patterns 2, 3 or 4 sided with 90° inside corners on the same plane<sup>1</sup>
- PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane<sup>1</sup>

### Length<sup>2</sup>

- 24 = 24"
- 48 = 48"
- 96 = 96"
- XX = Specify inches to the nearest 0.25"<sup>3</sup>

### CRI / CCT (90+ CRI minimum)

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- TW1840 = Tunable white 1800K - 4000K<sup>4</sup>
- TW2765 = Tunable white 2700K - 6500K<sup>4</sup>

### Optic



- RML = Recessed micro-prismatic lens
- RSL = Recessed satin opal lens
- ROL = Regressed opal lens (N/A with Soft Gaze)
- FOL = Flush opal lens (N/A with Soft Gaze)

Whitegoods reserves the right to change any information without prior notice.


### Notes

- 1 See pattern spec sheet.
- 2 Individual fixture lengths less than 2' may require remote driver.
- 3 Specify Lensed products to nearest 0.25". Specify Louvered and Tunable White products in 12" increments for continuous light. Louver supplied in 12" increments, balance of the run will have recessed blank covers on ends.
- 4 TW only available with RML, RSL, ROL and FOL.
- 5 Refer to specsheet for delivered lumen data for all product configurations.
- 6 See power supply page for details.

### Soft Gaze

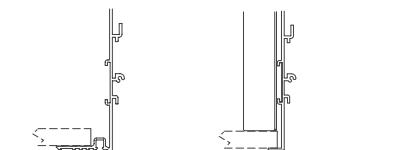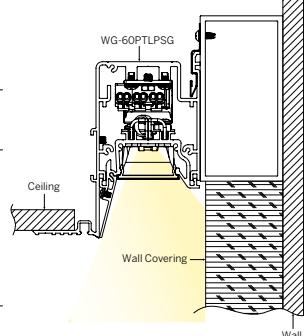

Plaster trim (RPT) Recessed trim (RBT)

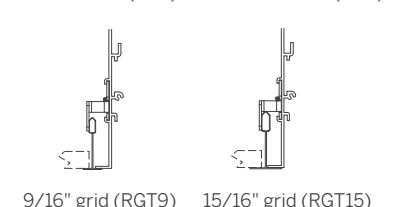


9/16" grid (RGT9) 15/16" grid (RGT15)




Wall mount clip


### Polar Plots

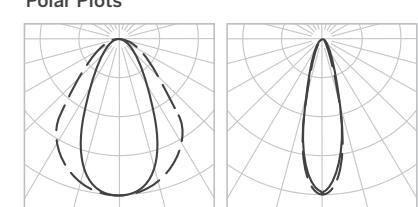

RML-80-...-W-W RLB-35-...-W-B

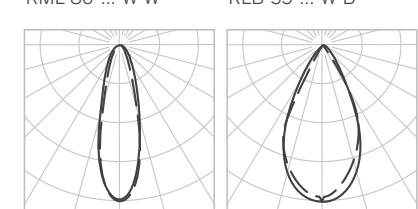

RLW-35-...-W-W RLB-50-...-W-B

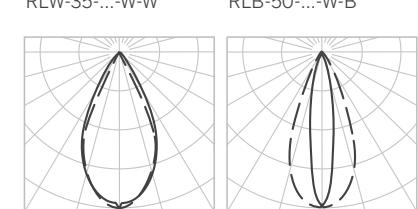

RLW-50-...-W-W REO-20x40-...-W-W