


# Iris Type S

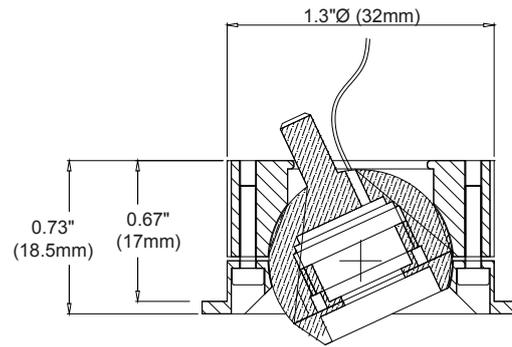

IP65 rated tiny eyeball fitting that finishes almost flush with its mount surface. Available tilt:  $\pm 22^\circ$

- Materials: Aluminum
- Color Temp: 2700K, 3000K, 3500K or 4000K
- Lamp: Type S (1 x Osram Oslon Square)
- IP Rating: IP65
- Optics: 0.4"Ø (10mm) optics.  
M = Medium 28°  
F = Flood 39.1°  
WF = Wide Flood 68.9°  
E = Elliptical 43.3° x 27.4°

Snoots available.

Finish: White (Standard) Pure White RAL 9010 30% gloss  
Black (Standard) Powdercoat Matte Black 5% gloss  
Custom paint and anodized finishes available

Dimming: EidoLED 0-10V or DMX

Driver: Constant current remote driver required  
Allow 2W at 500mA

Cut out: 1.3"Ø (34mm)

Locking: With 1.5mm Allen key


Available Tilt:  $\pm 22^\circ$

Weight: 0.22lb (0.1kg)

Order Code	series.col temp.beam.finish.dimming
Example	Iris Type S.2700K.19°.black.D010

Series	Color	Optic	Finish	Dimming and control	Snoot Options
Iris Type S	2700K	M	white	D010 0-10V DMX DMX	SN Straight Snoot SN2 Angled Snoot
	3000K	F	black		
	3500K	WF	custom		
	4000K	E			

### Snoot Options:



### LED Information

The Type S PCB uses 1 x Osram Oslon Square power LED thermally bonded to an aluminium PCB.