


# 3" ProTools Adjustable Round Recessed



Recessed Cone (RRC) / Plaster Trim (RPT)




Round Regressed Pinhole (RRPH) / Bezel Trim (RBT)

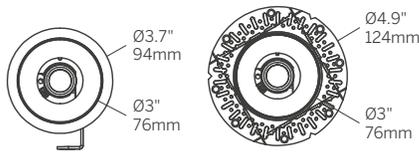


Bezel Trim (RBT)

Plaster Trim (RPT)

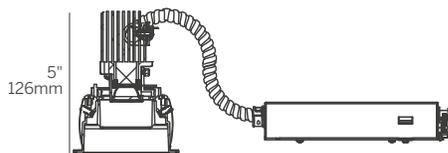

Minimum of 5" (126mm) ceiling void is required to install the integral driver from below the ceiling.



Multiple luminaire configurations for plaster trim. See Multiple Luminaire configuration sheet for details.

Ordering Information												
Model	Fixation	Power <sup>1</sup>	CRI	CCT <sup>2</sup>	Driver <sup>3</sup>	Cover	Lens	Beam	Trim Finish	Cover Finish	Housing <sup>4</sup>	Options
WG-75RPTA			92									
WG-75RPTA	RPT RBT	L M H	92	27 30 35 40	S010 D010 SPH PEQ0 D2S RS010 RD010 RD2S X	RRC RRPH	OA RSC	12 25 36	W B S	W B S	LP NC IC CP X	WL MLC AS ASL HL EM AWNRF

### Luminaire

- Part of a complete family of 3" aperture matching downlights.
- 3" round aperture recessed adjustable downlight with 1.6" diameter regressed light aperture.
- Tilt 40°, rotation 360° (continuous).
- Efficacy up to 68 lumens per watt (delivered).
- CREE 2-step MacAdam LEDs (12° Beam 3-step).
- CRI 92+ standard.
- L70 (TM21 Projected 85°C) Static White 66,500 hours (12° Beam 109,000 hours).
- ETL and ETL-C for dry and damp locations, Wet location optional.
- Luminaire installed and maintained from below the ceiling. Maximum ceiling thickness 1".
- Housings available (see housings page).
- Multiple luminaire configurations for plaster trim (see detail page).
- 5-year warranty.

### Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

### Power<sup>1</sup>

- L = Low Power, 5.6W @ 350mA (3.9W for 12° Beam)
- M = Mid Power, 8.1W @ 500mA (5.8W for 12° Beam)
- H = High Power, 11.5W @ 700mA (8.3W for 12° Beam)

### CRI

- 92 = 92 CRI

### CCT<sup>3</sup>

- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K

### Integral Driver<sup>3</sup>

- S010 = eldoLED 0-10V 1% dimming, 120-277V (22W)
- D010 = eldoLED 0-10V 0.1% dimming, 120-277V (22W)
- SPH = Phase (2-wire) 3% dimming, 120V only (20W)
- PEQ0 = Lutron Hi-Lume Premier 0.1% EcoSystem dimming, 120-277V (20W)
- D2S = DALI-2 for Static White 0.1% dimming, 120-277V (22W)

### Remote Driver<sup>3</sup>

- RS010 = Remote eldoLED 0-10V 1% dimming, 120-277V (22W, 50W or 100W)
- RD010 = Remote eldoLED 0-10V 0.1% dimming, 120-277V (22W, 50W or 100W)
- RD2S = Remote DALI-2 for Static White 0.1% dimming, 120-277V (22W, 50W or 100W)
- X = No Driver

### Cover

- RRC = Round Recessed Cone
- RRPH = Round Regressed Pinhole (N/A with 36° Beam)

### Lens

- OA = Open Aperture
- RSC = Recessed Satin Clear Lens

### Beam

- 12 = 12° Beam Angle
- 25 = 25° Beam Angle
- 36 = 36° Beam Angle

### Trim Finish

- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006

### Cover Finish

- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006

### Housing (Optional)<sup>4</sup>

- LP = Landing Pan
- NC = New Construction Housing
- IC = Insulated Ceiling Housing
- CP = Chicago Plenum Housing
- X = No Housing

### Options

- WL = Wet Location (Only available with RRC-RSC)
- MLC = Multiple Luminaire Configurations (RPT only - see detail page)
- AS = Aim Stick
- ASL = Aim Stick w/ Laser
- HL = Honeycomb Louver (specify with OA)
- EM = Emergency (remote only)
- AWNRf = Lutron Athena Wireless Node RF (RS010, RD010, RD2S drivers only)

1. Wattage shown does not include power supplies/drivers.  
 2. Refer to photometric data sheet for delivered lumens.  
 3. See driver information for details.  
 4. See housings pages for details