


# 3" ProTools Wall Wash


## Square Recessed



Bezel Trim (RBT)

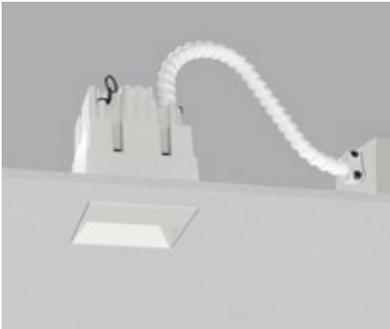


Plaster Trim (RPT)

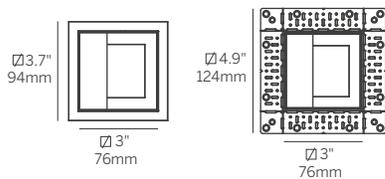


Bezel Trim (RBT)

Plaster Trim (RPT)

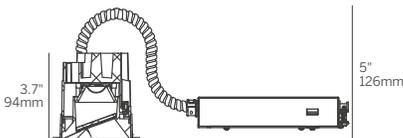

Minimum of 5" (126mm) ceiling void is required to install the integral driver from below the ceiling.

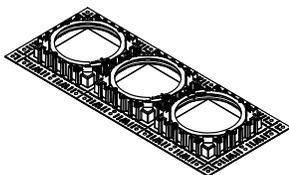

Multiple luminaire configurations for plaster trim. See Multiple Luminaire specsheet for details.

Ordering Information												
Model	Fixation	Power <sup>1</sup>	CRI	CCT <sup>2</sup>	Driver <sup>3</sup>	Cover	Lens	Beam	Trim Finish	Cover Finish	Housing <sup>4</sup>	Options
WG-75SPTWW	RBT RPT	L M H  TW WD	92 98	27 30 35 40 TW WD	S010 D010 SPH PEQ0 D2S RS010 RD010 RD2S RD2T X	SWW	WWL	WW	W S	W S	LP NC IC CP X	WL WC MLC EM AWNRF

### Luminaire

- Part of a complete family of 3" aperture matching downlights.
- 3" square recessed wall washer with rectangular regressed light aperture with flush kick reflector.
- Efficacy up to 57 lumens per watt (delivered).
- CREE 2-step MacAdam LEDs.
- CRI 92+ standard, 98+ optional.
- L70 (TM21 Projected 85°C) Static White 55,400 hours. Warm Dim + Tunable White 55,000 hours.
- ETL and ETL-C for dry and damp locations, Wet location optional.
- Luminaire installed and maintained from below the ceiling. Maximum ceiling thickness 1.2".
- Housings available (see housings page).
- Multiple luminaire configurations for plaster trim (see detail page).
- 5-year warranty.

### Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

### Power<sup>1</sup>

- L = Low Power, 5.7W @ 350mA
- M = Mid Power, 8.4W @ 500mA
- H = High Power, 12W @ 700mA
- TW = 9W @ 500mA
- WD = 11.8W @ 350mA

### CRI

- 92 = 92 CRI (Static White, TW only)
- 98 = 98 CRI (Static White)
- 95 = 95 CRI (WD only)

### CCT<sup>2</sup>

- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K
- TW = Tunable White 1800 - 4000K
- WD = Warm Dimming 1800 - 3000K

### Integral Driver<sup>3</sup>

- S010 = eldoLED 0-10V 1% dimming, 120-277V (22W)
- D010 = eldoLED 0-10V 0.1% dimming, 120-277V (22W)
- SPH = Phase (2-wire) 3% dimming, 120V only (20W)
- PEQ0 = Lutron Hi-Lume Premier 0.1% EcoSystem dimming, 120-277V (20W)
- D2S = DALI-2 for Static White 0.1% dimming, 120-277V (22W)

### Remote Driver<sup>3</sup>

- RS010 = Remote eldoLED 0-10V 1% dimming, 120-277V (22W, 50W or 100W)
- RD010 = Remote eldoLED 0-10V 0.1% dimming, 120-277V (22W, 50W or 100W)
- RD2S = Remote DALI-2 for Static White 0.1% dimming, 120-277V (22W, 50W or 100W)
- RD2T = Remote DALI-2 (DT8) for Tunable White 0.1% dimming, 120-277V (30W, 50W or 75W)
- X = No Driver

### Cover

- SWW = Square Wall Wash

### Lens

- WWL = Wall Wash Spread Lens

### Beam

- WW = Wall Wash

### Trim Finish

- W = White, 15% gloss, RAL 9003 (standard)
- S = Silver, 15% gloss, RAL 9006

### Cover Finish

- W = White, 15% gloss, RAL 9003 (standard)
- S = Silver, 15% gloss, RAL 9006

### Housing (Optional)<sup>4</sup>

- LP = Landing Pan
- NC = New Construction Housing
- IC = Insulated Ceiling Housing
- CP = Chicago Plenum Housing
- X = No Housing

### Options

- WL = Wet Location
- WC = Wood Ceiling Adapter (RPT only - specify ceiling thickness)
- MLC = Multiple Luminaire Configurations (RPT only - see detail page)
- EM = Emergency (remote only)
- AWNRF = Lutron Athena Wireless Node RF (RS010, RD010, RD2S, RD2T drivers only)

1. Wattage shown does not include power supplies/drivers.  
 2. See photometric data sheet for delivered lumens.  
 3. See driver information for details.  
 4. See housings pages for details