

# 4" ProTools Wall Wash


## Round Cylinder




Ordering Information											
Model	Mounting	Canopy	Power <sup>2</sup>	CRI	CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Housing Finish <sup>6</sup>	Reflector Finish	Options
WG-100RPTWW	SM	5	L	92	27	S010*	RWW	WW	W (std)	SCW (std)	EM
	SC1 <sup>1</sup>	X	M	98	30	D010*			B	SCB	AWNRF
	SC2 <sup>1</sup>		H		35	SPH*			S	SCS	
	SC3 <sup>1</sup>				40	PEQ0*			F	SCF	
	SR1				WD	D2S*					
	SR2					X <sup>5</sup>					
	SR3										
	SRX										

\*Add 'R' for remote driver, ex. 'RS010'


Surface mount (SM)

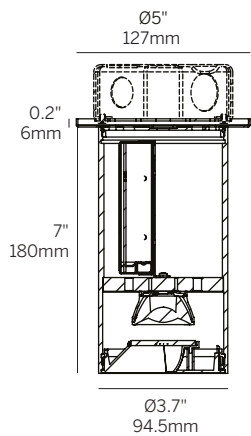


Direct mount (remote driver)





Suspended cable (SC)

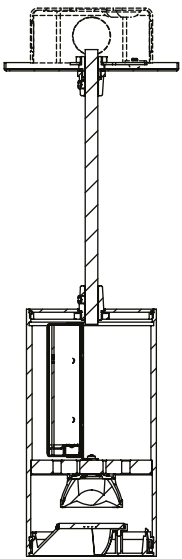

Suspended rigid stem (SR)

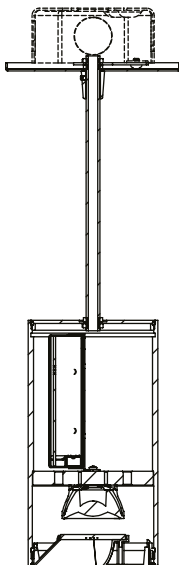

Canopy (5" dia, 4" j-box)



Powered by **I B L**

whitegoods

### Luminaire

- 4" round ceiling mounted cylinder low brightness wall wash.
- Surface, suspended cable and rigid stem mounting.
- High lumen output and excellent color rendition for all applications. Efficacy up to 100 lumens per watt (delivered).
- UGR < 19 for some configurations to comply with WELL requirements.
- CREE 2 step McAdam LEDs.
- CRI >92+ standard, >98+ available.
- Warm Dim 1800 - 3000K.
- Long life L70 55,000 hrs based on LM-80 & TM-21 applicable test data.
- Constant current drivers.
- 0-10V, Phase, Lutron, DALI and DMX options available.
- 5 Year warranty.

### Mounting

- SM = Surface mounted
- SC1 = Suspended cable 39.4" (1m)<sup>1</sup>
- SC2 = Suspended cable 78.7" (2m)<sup>1</sup>
- SC3 = Suspended cable 118.1" (3m)<sup>1</sup>
- SR1 = Suspended rigid swivel stem 39.4" (1m)
- SR2 = Suspended rigid swivel stem 78.7" (2m)
- SR3 = Suspended rigid swivel stem 118.1" (3m)
- SRX = Suspended rigid swivel stem (specify to nearest 0.25", 118.1" max.)

### Canopy

- 5 = 5" dia. for 4" j-box
- X = No Canopy (surface mount only)

### Power<sup>2</sup>

- L = Low Power, 6.3W @ 350mA
- M = Mid Power, 9W @ 250mA
- H = High Power, 12W @ 350mA

### CRI

- 92 = 92 CRI
- 98 = 98 CRI (n/a for WD)

### CCT<sup>3</sup>

- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K
- WD = Warm Dimming 1800 - 3000K

### Integral Driver<sup>4</sup>

- S010 = eldoLED 0-10V 1% dimming, 120-277V (22W)
- D010 = eldoLED 0-10V 0.1% dimming, 120-277V (22W)
- SPH = Phase (2-wire) 3% dimming, 120V only (20W)
- PEQ0 = Lutron Hi-Lume Premier 0.1% EcoSystem dimming, 120-277V (20W)
- D2S = DALI-2 (DT6) for Static White 0.1% dimming, 120-277V (22W)

### Remote Driver<sup>4</sup>

- RS010 = Remote eldoLED 0-10V 1% dimming, 120-277V (22W, 50W or 100W)
- RD010 = Remote eldoLED 0-10V 0.1% dimming, 120-277V (22W, 50W or 100W)
- RSPH = Remote phase (2-wire) 3% dimming, 120V only (20W)
- RPEQ0 = Remote Lutron Hi-Lume Premier 0.1% EcoSystem dimming, 120-277V (20W)
- RD2S = Remote DALI-2 (DT6) for Static White 0.1% dimming, 120-277V (22W, 50W or 100W)
- X = No Driver<sup>5</sup>

### Cover

- RWW = Round Wall Wash

### Beam

- WW = Wall Wash

### Housing Finish<sup>6</sup>

- W = White, RAL 9003 (standard)
- B = Black, RAL 9017
- S = Silver, RAL 9006
- F = Custom finish, specify RAL code

### Reflector Finish

- SCW = Silver Chrome with White Baffle, RAL 9003 (standard)
- SCB = Silver Chrome with Black Baffle, RAL 9017
- SCS = Silver Chrome with Silver Baffle, RAL 9006
- SCF = Silver Chrome with Custom finish baffle, specify RAL

### Options

- EM = Emergency LED battery backup (remote only)
- AWNRF = Lutron Athena Wireless Node RF (RS010, RD010, RD2S drivers only)

1. Suspended cable field adjustable.  
 2. Wattage shown does not include power supplies/drivers.  
 3. See photometric data sheet for delivered lumens.  
 4. See driver information for details.  
 5. Refer to driver information page for driver options that can power multiple fixtures. Ordered separately.  
 6. Fixture, stem and canopy finish match.

