

Box Cove 2



Contents

1 overview

2 specifications / configurator


3 photometry



Classic square-fronted continuous linear interior wall and mullion mount for clean, minimal effect with optimized distribution for maximum throw of light.


QS Quick Ship Available

- Continuous surface wall or mullion mounted cove system that delivers an even wash of directed light to the ceiling above, and redirected light to softly illuminate the wall behind the fixture.
- Light source positioned for optimum vertical spread.
- Extruded aluminum housing, easily installed internal LED tray assembly with integral driver. Remote driver required for WD / RGBW versions. Field replaceable LED boards.
- Efficacy up to 169 lumens per watt (delivered) @ 3000K, see photometry page for details.
- 90+ CRI, 3 Step MacAdam (Static White).
- L70 (TM21 Projected 85°C) Static White / Tunable White / RGBW 50,000 hours. Warm Dim 36,000 hours.
- ETL and ETL-C for dry and damp locations, CE, Chicago Plenum.
- Satin clear diffuser for high efficiency and soft edge beam without striations.
- Lengths and angles factory cut to exact field dimensions. Standard and custom corners.
- Powdercoat painted.

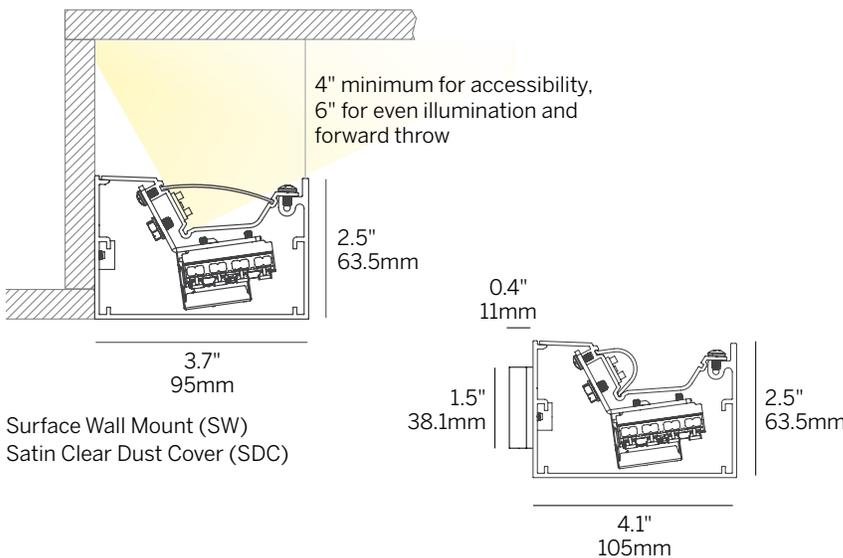


Surface Wall Mount (SW)
Satin Clear Dust Cover (SDC)


Surface Wall Mullion Mount (SWM)
Snap On Satin Diffuser (SSD)




Pattern Coffered (PC)



Pattern Rafted (PR)



Plane To Plane
Inside Corner (PPI)



Plane To Plane
Outside Corner (PPO)

Ordering Information									
Model	Fixation	Pattern	Length	Power ³	CRI/CCT ⁴	Driver ⁵	Lens	Finish	Options
WG-BC2	SW SWM	S ¹ PC ² PR ² PPI ² PPO ² PZ ²	24 36 48 72 96 XX	P0 P1 P2 P3 P4 L M H	927 930 935 940 TW1840 TW2765 WD RGBW	E1 L1 D2DT6 D2DT8 D010 DPH L3DAE L3DOE	EL96 DALI DMX	SSD (std) SDC	W (std) B S DB F AWNRF BT CP EWM EM

Model

- WG-BC2 = Box Cove 2

Fixation

- SW = Surface Wall Mount
- SWM = Surface Wall Mullion Mount

Pattern

- S = Straight run¹
- PC = Standard patterns coffer 2, 3 or 4 sided with 90° inside corners²
- PR = Standard patterns raft 2, 3 or 4 sided with 90° outside corners²
- PPI = Wall to wall / wall to ceiling, 90° inside corner²
- PPO = Wall to wall / wall to ceiling, 90° outside corner²
- PZ = Non-standard patterns and/or corners other than 90°, consult factory²

Length

- 24 = 24"
- 36 = 36"
- 48 = 48"
- 72 = 72"
- 96 = 96"
- XX = Specify inches to the nearest 0.25"

Power³

- P0 = 1.5 W/ft
- P1 = 3 W/ft
- P2 = 6 W/ft
- P3 = 10 W/ft
- P4 = 15 W/ft
- L = 2.7 W/ft WD low power (24V)
- M = 5.5 W/ft WD medium power (24V) [RGBW 7.6 W/ft]
- H = 8 W/ft WD high power (24V)

CRI / CCT (90+ CRI minimum)⁴

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- TW1840 = Tunable white 1800K - 4000K
- TW2765 = Tunable white 2700K - 6500K
- WD = Warm Dim 1800K - 3000K
- RGBW = 3000K White

Driver (integral)⁵

- E1 = eldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, EcoSystem (120-277V)
- D2DT6 = DALI-2 (DT6), 0.1% dimming (120-277V)
- D2DT8 = DALI-2 (DT8), 0.1% dimming (120-277V) [TW only]
- D010 = eldoLED 10%, 0-10V dimming, 120-277V [WD only]
- DPH = Phase Dimming, 1% dimming, 120V only (remote) [WD only]
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V [WD only]
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V (remote) [WD only]
- EL96 = eldoLED 0-10V, 0.1% dimming (120-277V) [WD only]
- DALI = eldoLED DALI (DT6), 0.1% dimming (120-277V) [WD only]
- DMX = eldoLED 24V, DMX dimming [WD + RGBW Only]

Lens

- SSD = Snap On Satin Diffuser (standard)
- SDC = Satin Clear Dust Cover

Finish

- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- DB = Dark Bronze (contact factory)
- F = Custom finish, specify RAL


Options

- AWNRF = Lutron Athena Wireless Node RF (specify with E1, D2DT6, D2DT8, EL96 or DALI)
- BT = Wireless CAS – Casambi (remote only, specify with E1, D2DT6, D2DT8, D010, EL96, DALI or DMX)
- CP = Chicago Plenum rated, complies with CCEA requirements
- EWM = End Wall Mount
- EM = Emergency LED driver (remote)

- Standard setup assumes the cove ends at a perpendicular wall and the LED board is setback from the end to minimize light on the perpendicular wall. Contact us for options.
- See pattern specsheet.
- Wattage shown does not include power supplies/drivers.
- See photometric data sheet for delivered lumens.
- See power supply page for details.

WG-BC2-...-SSD-W¹
Delivered Lumens Per Foot

	Power							
	P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]	L [2.7 W/ft]	M [5.5 W/ft] ³	H [8.0 W/ft]
CCT								
927	243	470	884	1358	2001	-	-	-
930	254	490	920	1415	2084	-	-	-
935	263	507	953	1466	2182	-	-	-
940	265	520	978	1505	2241	-	-	-
TW ²	141	255	457	694	-	-	-	-
WD ²	-	-	-	-	-	204	424	613
RGBW ³	-	-	-	-	-	-	346	-




Beam Angle (0-180) = 53.4
Beam Angle (90-270) = 115.9

	Power Multiplier							
	P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]	L [2.7 W/ft]	M [5.5 W/ft] ³	H [8.0 W/ft]
9XX	0.12	0.23	0.44	0.67	1.00	-	-	-
TW	0.06	0.12	0.21	0.32	-	-	-	-
WD	-	-	-	-	-	0.09	0.19	0.28
RGBW	-	-	-	-	-	-	0.16	-

- 1 Polar Plot and Isofootcandle diagram are applicable to part number noted; use Multiplier table(s) to approximate other Power / CCT options.
- 2 TW lumen data at maximum output (4000K). WD lumen data at maximum output (3000K).
- 3 RGBW lumen data at maximum output with 3000K White LED. M-**RGBW** power level wattage is 7.6W/ft.

CCT Multiplier			
927	930	935	940
0.92	0.95	1.00	1.03

WG-BC2-...-S-...-P2-935-...-SSD-W
10'-0" ceiling height

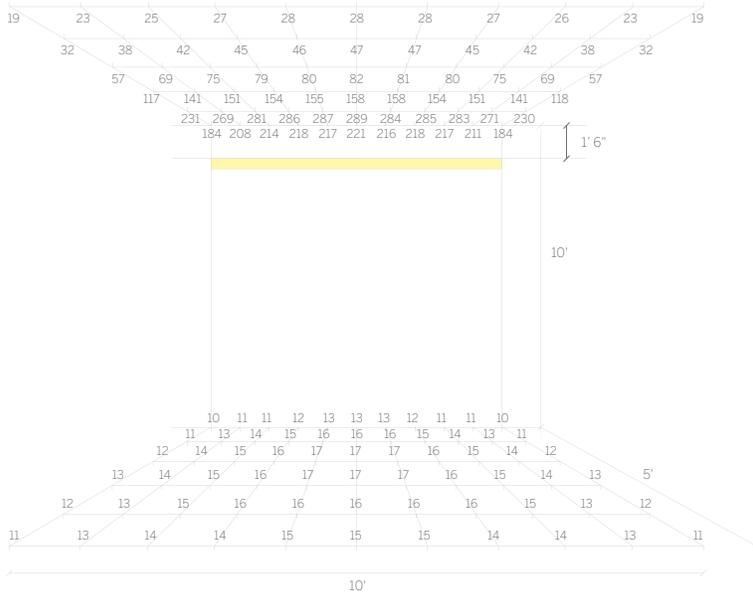

Surface reflectances:

- 80% Ceiling
- 50% Wall
- 20% Floor

Illuminance points are spaced 1'-0" on center.
Illuminance values are shown in units of foot-candles.

WG-BC2-...-S-...-P4-935-...-SSD-W
20'-0" ceiling height

