



EN66-RRWH-ME-...-AS...			
Delivered Lumens - Asymmetric			
Diameter [Wattage]			
106 [11 CV] 106 [17 CV]			
CCT	27-	680	1039
	30-	714	1087
	40-	743	1131
Polar Plot / Cone Of Light Multiplier			
106 [11 CV] 106 [17 CV]			
	0.66	1.00	



Beam Angle (0-180) = Asymmetric
Beam Angle (90-270) = Asymmetric

ISOILLUMINANCE DIAGRAM - 17W 3000K Asymmetric¹
EN66-RRWH-ME-106-17-CV-30-AS²

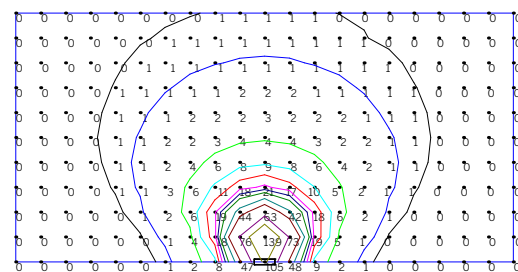

Value [Fc]	Color	Value [Fc]	Color	Value [Fc]	Color
0.5	Black	15	Red	40	Teal
1	Blue	20	Magenta	50	Brown
5	Green	25	Dark Blue	75	Purple
10	Cyan	30	Dark Green	100	Olive

- 1 Illuminance values in foot-candles for the fixture part number noted. Illuminance points spaced 1'-0" on center.
- 2 Fixture is mounted 1'-0" above the illuminated surface.