


20 Linear Mini Edgeless Cove

WG-20MEC-...-MPL-W¹ Delivered Lumens Per Foot


		Power			
		L [3 W/ft]	M [6 W/ft]	H [10 W/ft]	RGBW [7.6 W/ft]
CCT	927	248	495	867	—
	930	270	538	942	—
	935	319	640	1119	—
	940	380	760	1330	—
	WD ²	190	394	569	—
	RGBW ³	—	—	—	322




BEAM ANGLE (0-180) = 80.2
BEAM ANGLE (90-270) = 100.7

		Power			
		P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]
CCT	TW1840 ⁴	235	459	851	1310
	TW2765 ⁴	235	448	840	1310

WG-20MEC-RPT-...-L-935-X-MPL-W 10'-0" ceiling height Satin opal diffuser

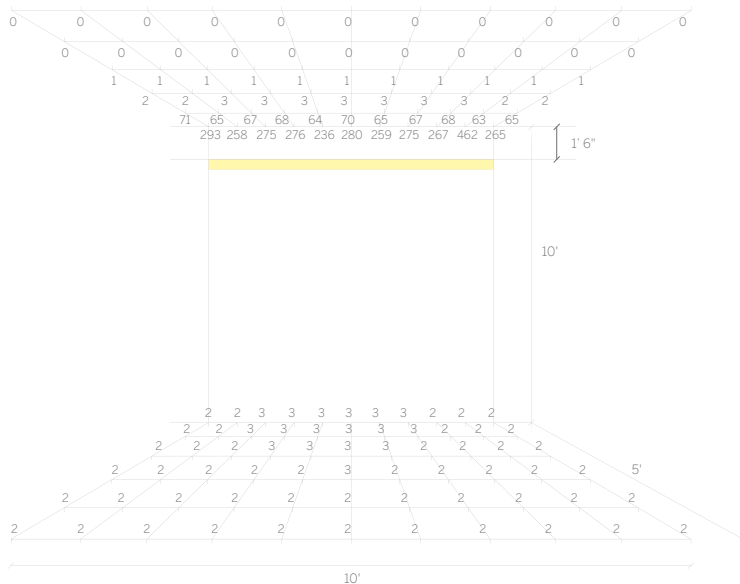

WG-20MEC-RPT-...-H-935-X-MPL-W 10'-0" ceiling height Satin opal diffuser

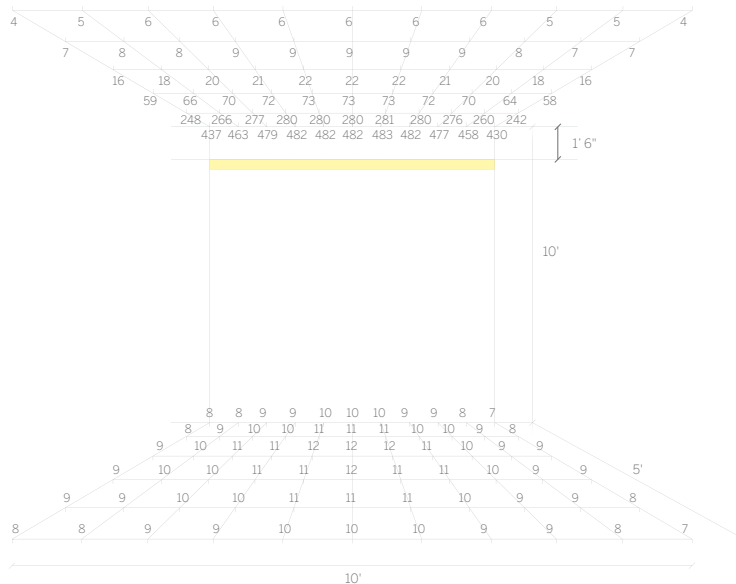

Power Multiplier				
	L [3 W/ft]	M [6 W/ft]	H [10 W/ft]	RGBW [7.6 W/ft]
9XX/RGBW	0.29	0.57	1.00	0.29
WD	0.17	0.35	0.51	—

Power Multiplier				
	P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]
TW1840	0.21	0.41	0.76	1.17
TW2765	0.21	0.40	0.75	1.17

CCT Multiplier				
	927	930	935	940
	0.77	0.84	1.00	1.19

Surface reflectances:

80% Ceiling

50% Wall

20% Floor

Illuminance points are spaced 1'-0" on center.


Illuminance values are shown in units of foot-candles.

- 1 Polar Plot is applicable to part number noted; use Multiplication Factor table to approximate other models or refer to online photometry.
- 2 WD lumen data at maximum output (3000K).
- 3 RGBW lumen data at maximum output with 3000K White LED.
- 4 TW lumen data at maximum output (4000K and 6500K, respectively). TW1840 produces approx. 40% less lumens at 1800K; TW2765 produces approx. 5% less lumens at 2700K.

20 Linear Mini Edgeless Cove

WG-20MEC-...-OD-W¹ Delivered Lumens Per Foot


		Power			
		L [3 W/ft]	M [6 W/ft]	H [10 W/ft]	RGBW [7.6 W/ft]
CCT	927	176	352	617	-
	930	192	383	670	-
	935	227	455	796	-
	940	270	540	946	-
	WD ²	135	280	405	-
	RGBW ³	-	-	-	229




BEAM ANGLE (0-180) = 110.1
BEAM ANGLE (90-270) = 110.1

		Power			
		P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]
CCT	TW1840 ⁴	167	326	605	931
	TW2765 ⁴	167	318	597	931

WG-20MEC-RPT-...-L-935-X-OD-W 10'-0" ceiling height Satin opal diffuser

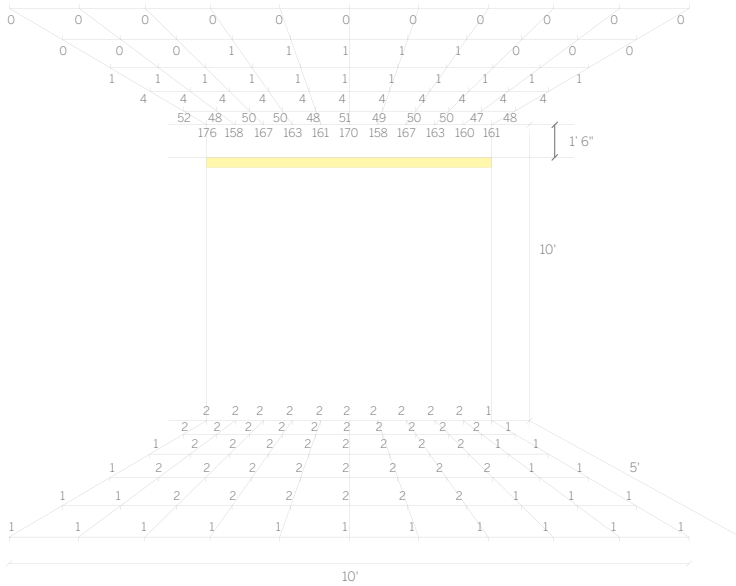

WG-20MEC-RPT-...-H-935-X-OD-W 10'-0" ceiling height Satin opal diffuser

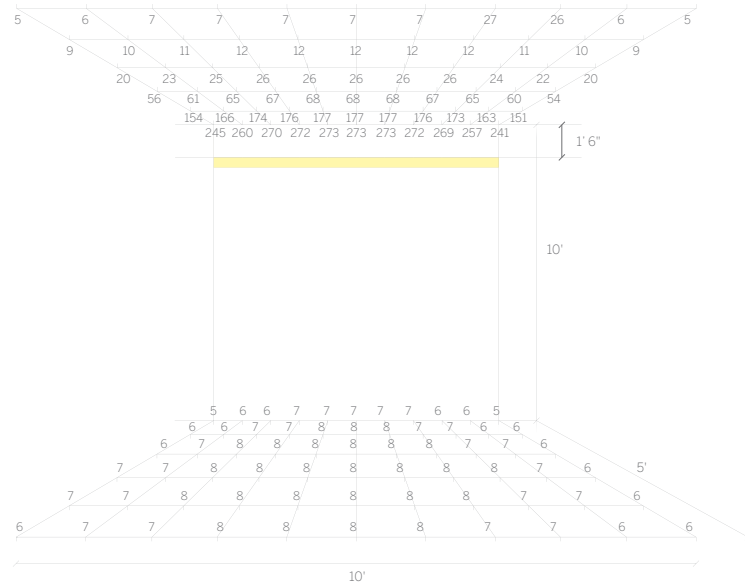

Power Multiplier				
	L [3 W/ft]	M [6 W/ft]	H [10 W/ft]	RGBW [7.6 W/ft]
9XX/RGBW	0.29	0.57	1.00	0.29
WD	0.17	0.35	0.51	-

Power Multiplier				
	P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]
TW1840	0.21	0.41	0.76	1.17
TW2765	0.21	0.40	0.75	1.17

CCT Multiplier				
	927	930	935	940
	0.77	0.84	1.00	1.19

Surface reflectances:

80% Ceiling

50% Wall

20% Floor

Illuminance points are spaced 1'-0" on center.

Illuminance values are shown in units of foot-candles.

- 1 Polar Plot is applicable to part number noted; use Multiplication Factor table to approximate other models or refer to online photometry.
- 2 WD lumen data at maximum output (3000K).
- 3 RGBW lumen data at maximum output with 3000K White LED.
- 4 TW lumen data at maximum output (4000K and 6500K, respectively). TW1840 produces approx. 40% less lumens at 1800K; TW2765 produces approx. 5% less lumens at 2700K.