

## 20 Linear Mini Z Cove






Compact and powerful continuous perimeter luminaire with plaster-in Plaster Trim knife edge detail for a perfect finish. Delivers light smoothly down the wall from a concealed position.

<b>Housing</b>	Precision extruded aluminum for true dimensions and tolerances Alignment hardware for invisible seam from below Housing provided in any exact length Snap-in LED insert for easy final installation Standard and tailored lengths Corners: standard and non-standard Finishes: RAL 9010 white 15% gloss
<b>Integration</b>	Seamless, architectural integration into gypsum walls and ceilings
<b>Distribution</b>	Continuous even illumination using an opal lens for homogeneous lens appearance, or satin diffuser / micro-prismatic lens for higher efficiency
<b>LED</b>	Constant Voltage, 90+ CRI, 3 Steps MacAdam, 3 W - 10 W per foot L70 lifetime (TM21 Projected 85C) Static White (2700K-4000K) = 60,000 hours RGBW (3000K White) = 50,000 hours Warm Dim (1800K-3000K) = 36,000 hours Tunable White, 1800K - 4000K / 2700K - 6500K, 1.5 W - 10 W/ft, constant current, >90 CRI L70 (TM21 Projected 85°C) Tunable White = 50,000 hours
<b>Lens</b>	OD - Opal Diffuser provides even, continuous line of light and general illumination MPL - Micro-prismatic lens provides lower brightness, general illumination
<b>Driver</b>	Remote driver Compatible with quality constant voltage (Static White / WD / RGBW) and constant current (Tunable White) drivers
<b>Connectivity</b>	Lutron Athena Wireless Node RF Casambi BlueTooth
<b>Weight</b>	3lbs per foot
<b>Operating Temp</b>	Suitable for operation in maximum ambient temperature of 35C (95F)
<b>Warranty</b>	5-year Limited (see complete company warranty information)
<b>Certifications</b>	ETL and ETL-C for dry and damp location, CE
<b>Voltages</b>	Low Voltage Fixture / 120-277VAC Driver (remote)


### Lenses/Accessories



Opal Diffuser (OD)  
Micro-prismatic Lens (MPL)

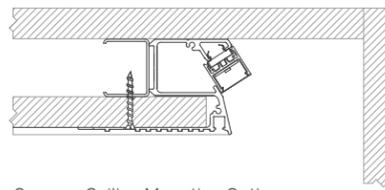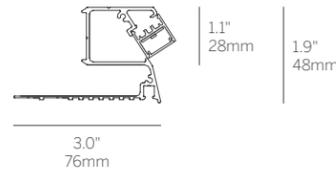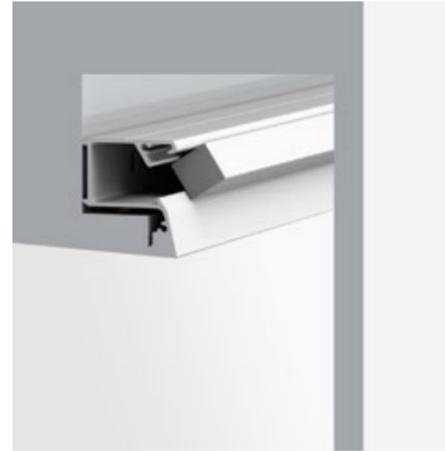

Gypsum Ceiling Mounting Options  
2.5" minimum offset, 6" typical offset



technical  
information

## 20 Linear Mini Z Cove

Model	Fixation	Pattern	Length	Power <sup>2</sup>	CRI/ CCT <sup>3</sup>	Driver <sup>5</sup>	Lens	Finish	Options
WG-20MZC	RPT	S PI <sup>1</sup> PO <sup>1</sup> PZ <sup>1</sup>	A A x B A x B x C A x B x A x B	L M H	927 930 935 940 WD RGBW	X S D010 DPH L3DAE L3DOE	OD (std) MPL	W (std) F	AWNRF BT EM
				PO P1 P2 P3	TW1840 TW2765	D2DT6 D2DT8			

### Model

- WG-20MZC = 20 Linear Mini Z Cove

### Fixation

- RPT = Recessed plaster trim

### Pattern

- S = Straight run
- PI = Standard patterns 2, 3, or 4 sided with 90° inside corners on the same plane<sup>1</sup>
- PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane<sup>1</sup>
- PZ = Non-standard patterns and/or corners other than 90°; consult factory<sup>1</sup>

### Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25")  
For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B)

### Power<sup>3</sup>

- L = 3W/ft low power (WD 2.7 W/ft) (24V)
- M = 6W/ft mid power (WD 5.5 W/ft) (24V) (RGBW - 7.6 W/ft)
- H = 10W/ft high power (WD 8 W/ft) (24V)
- P0 = 1.5 W/ft
- P1 = 3 W/ft
- P2 = 6 W/ft
- P3 = 10 W/ft

### CRI/CCT (90+ CRI minimum)<sup>4</sup>

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- WD = Warm Dim (1800K - 3000K)
- RGBW = 3000K White (M power only)
- TW1840 = Tunable white (1800K - 4000K)
- TW2765 = Tunable white (2700K - 6500K)

### Driver (remote)<sup>5</sup>

- X = No driver, ordered separately
- S = Standard, non-dim driver 120-277V
- D010 = eldoLED 10%, 0-10V dimming, 120-277V
- DPH = Phase Dimming, 1% dimming, 120V only
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- EL96 = eldoLED 24V, 0.1% 0-10V Dimming
- DALI = eldoLED DALI (DT6), 0.1% dimming (120-277V)
- DMX = eldoLED 24V, 0.1% DMX Dimming
- E1 = eldoLED 0.1% dimming, 0-10V (120-277V)
- D2DT6 = DALI-2 (DT6), 0.1% dimming (120-277V) [TW only]
- D2DT8 = DALI-2 (DT8), 0.1% dimming (120-277V) [TW only]

### Lens

- OD = Satin opal diffuser (standard)
- MPL = Micro-prismatic lens

### Finish

- W = White, 15% gloss, RAL 9010 (standard)
- F = Custom finish, specify RAL

### Options

- AWNRF = Lutron Athena Wireless Node RF (specify with D010, EL96, DALI, E1, D2DT6 or D2DT8)
- BT = Wireless CAS - Casambi (specify with D010, EL96, DALI, DMX, E1, D2DT6 or D2DT8)
- EM = Emergency LED driver (remote)

Whitegoods reserves the right to change any information without prior notice.

### Notes

- See pattern specsheet.
- Wattage shown does not include power supplies/drivers.
- Refer to specsheet for delivered lumen data for all product configurations.
- TW offered up to P3 (10W/ft) power level.
- Remote power supply required. See power supply page for details.