


20 Linear Perimeter Regressed and Wallgraze


WG-20LPR-...-OD-W ¹ Delivered Lumens Per Foot					
		Power			
		L [3 W/ft]	M [6 W/ft]	H [10 W/ft]	RGBW [7.6 W/ft]
CCT	927	172	345	603	-
	930	188	375	656	-
	935	222	445	779	-
	940	264	529	926	-
	WD ²	132	274	396	-
	RGBW ³	-	-	-	226
UGR ⁴		29.5	32.0	33.8	-

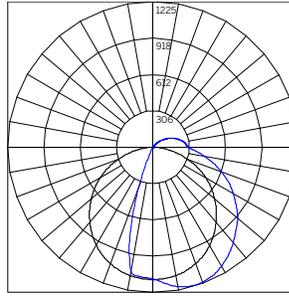


BEAM ANGLE (0-180) = 105.8°
BEAM ANGLE (90-270) = 114.2°

WG-20LPR-...-OD-W ¹ Delivered Lumens Per Foot					
		Power			
		P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]
CCT	TW1840 ²	164	319	592	911
	TW2765 ²	164	312	584	911

WG-20LPR-...-S-...-H-935-OD-W
10'-0" ceiling height
Satin opal diffuser

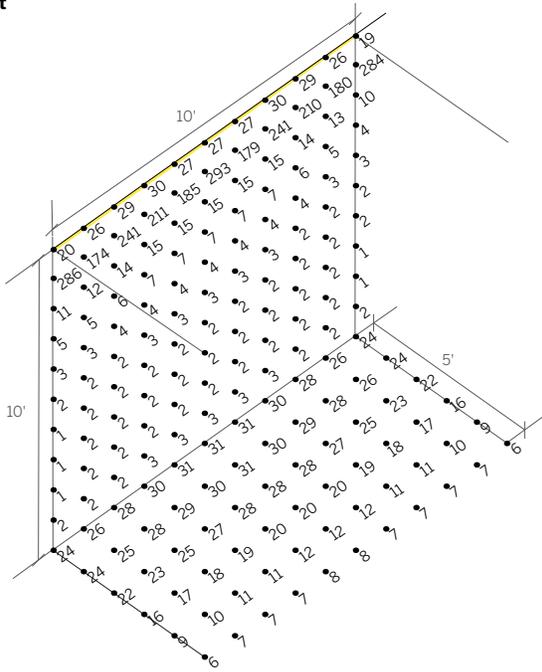

WG-20LPRSG-...-S-...-H-935-OD-W
10'-0" ceiling height
Satin opal diffuser and soft gaze

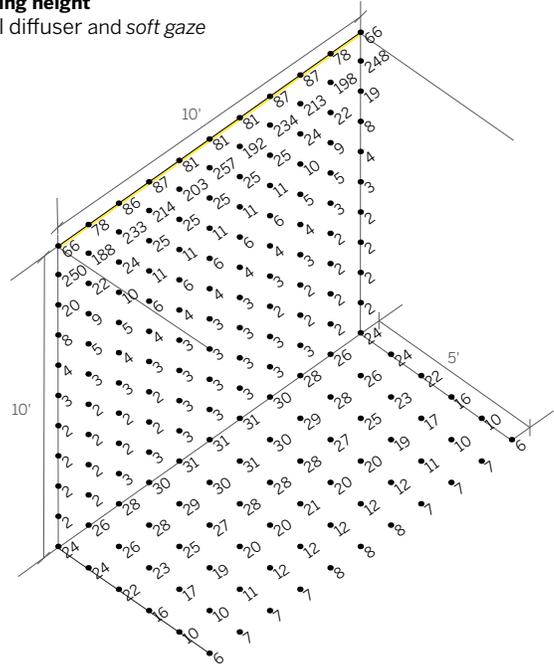

Power Multiplier			
	L [3 W/ft]	M [6 W/ft]	H [10 W/ft]
9XX	0.29	0.57	1.00
WD	0.17	0.35	0.51
RGBW	-	0.29	-


Power Multiplier				
	P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]
TW1840	0.21	0.41	0.76	1.17
TW2765	0.21	0.40	0.75	1.17

CCT Multiple				
	927	930	935	940
	0.77	0.84	1.00	1.19

- 1 Polar Plot is applicable to part number noted; use Multiplication Factor table to approximate other models or refer to online photometry.
- 2 WD lumen data at maximum output (3000K).
- 3 RGBW lumen data at maximum output with 3000K White LED.
- 4 UGR value noted is the maximum UGR (crosswise) with 935 LEDs / 48" length.

20 Linear Perimeter Regressed and Wallgraze


WG-20LPR-...-MPL-W ¹ Delivered Lumens Per Foot					
Power					
	L [3 W/ft]	M [6 W/ft]	H [10 W/ft]	RGBW [7.6 W/ft]	
CCT	927	234	467	818	-
	930	254	508	889	-
	935	301	604	1056	-
	940	359	717	1255	-
	WD ²	179	372	537	-
	RGBW ³	-	-	-	306
UGR ⁴	32.6	35.2	37.0	-	-

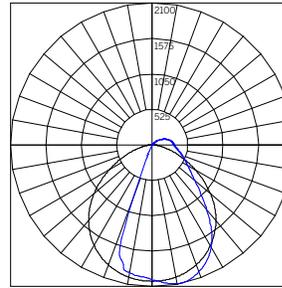


BEAM ANGLE (0-180) = 66.3°
BEAM ANGLE (90-270) = 105.9°

WG-20LPR-...-MPL-W ¹ Delivered Lumens Per Foot					
Power					
	P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	
CCT	TW1840 ²	222	433	803	1236
	TW2765 ²	222	423	792	1236

WG-20LPR-...-S-...-H-935-MPL-W 10'-0" ceiling height Satin clear diffuser

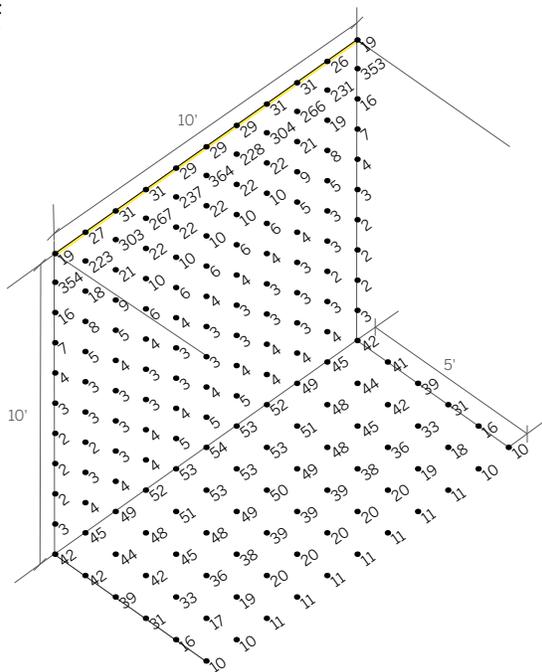

WG-20LPRSG-...-S-...-H-935-MPL-W 10'-0" ceiling height Satin clear diffuser and soft gaze

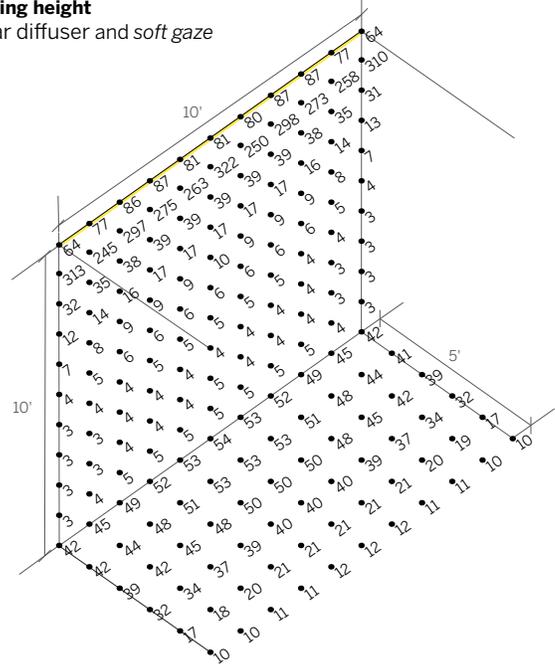

Power Multiplier			
	L [3 W/ft]	M [6 W/ft]	H [10 W/ft]
9XX	0.29	0.57	1.00
WD	0.17	0.35	0.51
RGBW	-	0.29	-

Power Multiplier				
	P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]
TW1840	0.21	0.41	0.76	1.17
TW2765	0.21	0.40	0.75	1.17

CCT Multiple				
	927	930	935	940
	0.77	0.84	1.00	1.19

- 1 Polar Plot is applicable to part number noted; use Multiplication Factor table to approximate other models or refer to online photometry.
- 2 WD lumen data at maximum output (3000K).
- 3 RGBW lumen data at maximum output with 3000K White LED.
- 4 UGR value noted is the maximum UGR (crosswise) with 935 LEDs / 48" length.

20 Linear Perimeter Regressed and Wallgraze



WG-20LPR-...-NL16-W¹
Delivered Lumens Per Foot

		Power			
		L [3 W/ft]	M [6 W/ft]	H [10 W/ft]	RGBW [7.6 W/ft]
CCT	927	191	382	669	-
	930	208	415	727	-
	935	246	494	863	-
	940	293	586	1026	-
	WD ²	146	304	439	-
	RGBW ³	-	-	-	250
UGR ⁴		16.2	18.8	20.6	-

WG-20LPR-...-NL16-W¹
Delivered Lumens Per Foot


		Power			
		P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]
CCT	TW1840 ²	181	354	656	1010
	TW2765 ²	181	345	648	1010

WG-20LPR-...-S-...-H-935-NL16-W
10'-0" ceiling height
Satin opal diffuser

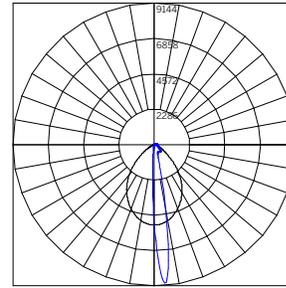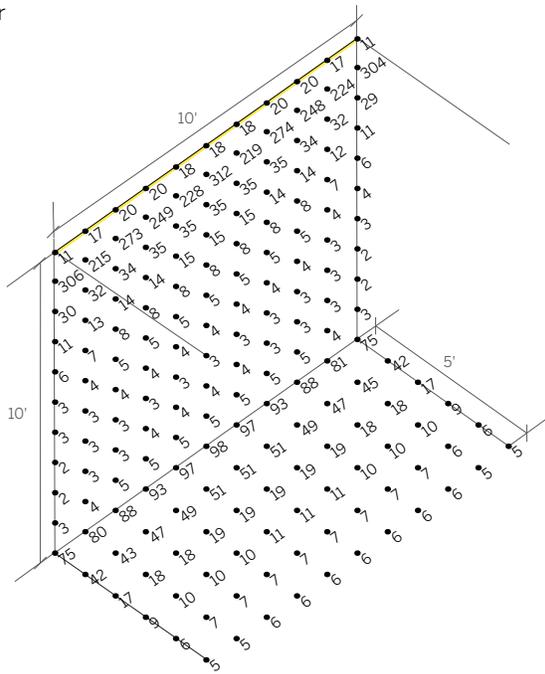

BEAM ANGLE (0-180) = 10.6°
BEAM ANGLE (90-270) = 78.2°

WG-20LPRSG-...-S-...-H-935-NL16-W
10'-0" ceiling height
Satin opal diffuser and soft gaze

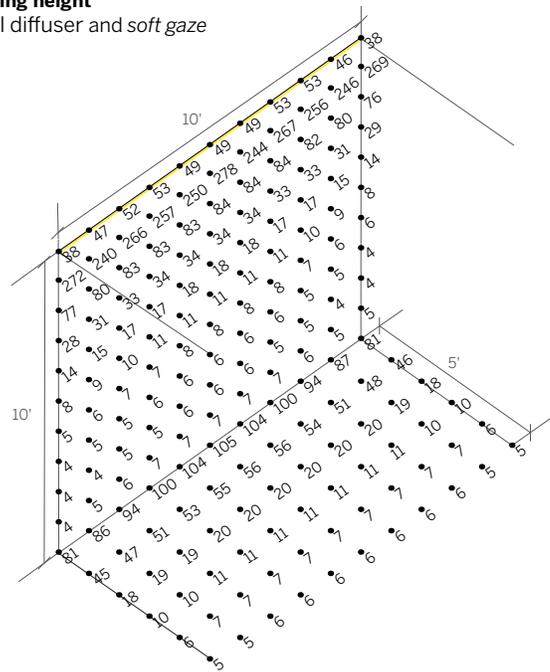

Power Multiplier			
	L [3 W/ft]	M [6 W/ft]	H [10 W/ft]
9XX	0.29	0.57	1.00
WD	0.17	0.35	0.51
RGBW	-	0.29	-


Power Multiplier				
	P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]
TW1840	0.21	0.41	0.76	1.17
TW2765	0.21	0.40	0.75	1.17

CCT Multiple				
	927	930	935	940
	0.77	0.84	1.00	1.19

- 1 Polar Plot is applicable to part number noted; use Multiplication Factor table to approximate other models or refer to online photometry.
- 2 WD lumen data at maximum output (3000K).
- 3 RGBW lumen data at maximum output with 3000K White LED.
- 4 UGR value noted is the maximum UGR (crosswise) with 935 LEDs / 48" length.

20 Linear Perimeter Regressed and Wallgraze


WG-20LPR-...-LL45B-W ¹ Delivered Lumens Per Foot					
		Power			
		L [3 W/ft]	M [6 W/ft]	H [10 W/ft]	RGBW [7.6 W/ft]
CCT	927	57	113	199	-
	930	62	123	216	-
	935	73	147	256	-
	940	87	174	305	-
	WD ²	43	90	130	-
	RGBW ³	-	-	-	74
	UGR ⁴	16.2	18.8	20.6	-

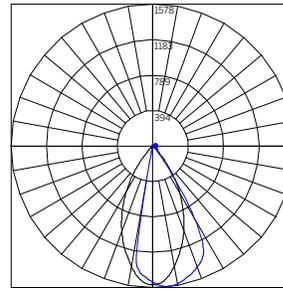


BEAM ANGLE (0-180) = 50.0°
BEAM ANGLE (90-270) = 51.4°

WG-20LPR-...-LL45B-W ¹ Delivered Lumens Per Foot					
		Power			
		P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]
CCT	TW1840 ²	54	105	195	300
	TW2765 ²	54	103	192	300

WG-20LPR-...-S-...-H-935-LL45B-W
10'-0" ceiling height
Satin opal diffuser

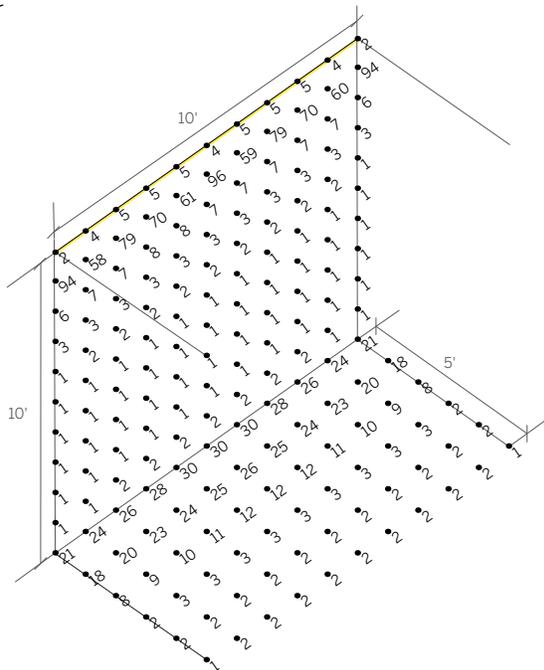

WG-20LPRSG-...-S-...-H-935-LL45B-W
10'-0" ceiling height
Satin opal diffuser and soft gaze

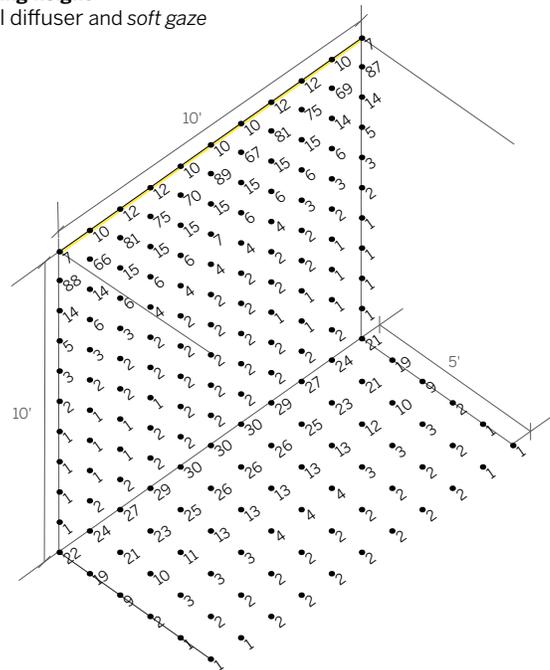

Power Multiplier			
	L [3 W/ft]	M [6 W/ft]	H [10 W/ft]
9XX	0.29	0.57	1.00
WD	0.17	0.35	0.51
RGBW	-	0.29	-

Power Multiplier				
	P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]
TW1840	0.21	0.41	0.76	1.17
TW2765	0.21	0.40	0.75	1.17


CCT Multiple				
	927	930	935	940
	0.77	0.84	1.00	1.19

- 1 Polar Plot is applicable to part number noted; use Multiplication Factor table to approximate other models or refer to online photometry.
- 2 WD lumen data at maximum output (3000K).
- 3 RGBW lumen data at maximum output with 3000K White LED.
- 4 UGR value noted is the maximum UGR (crosswise) with 935 LEDs / 48" length.

20 Linear Perimeter Regressed and Wallgraze

WG-20LPR-...-LL45W-W¹
Delivered Lumens Per Foot

		Power			
		L [3 W/ft]	M [6 W/ft]	H [10 W/ft]	RGBW [7.6 W/ft]
CCT	927	107	213	374	-
	930	116	232	406	-
	935	138	276	482	-
	940	164	328	573	-
	WD ²	82	170	245	-
	RGBW ³	-	-	-	140
	UGR ⁴	16.2	18.8	20.6	-

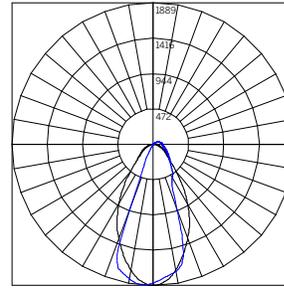


BEAM ANGLE (0-180) = 39.9°
BEAM ANGLE (90-270) = 59.9°


WG-20LPR-...-LL45W-W¹
Delivered Lumens Per Foot

		Power			
		P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]
CCT	TW1840 ²	101	198	367	564
	TW2765 ²	101	193	362	564

WG-20LPR-...-S-...-H-935-LL45W-W
10'-0" ceiling height
Satin opal diffuser

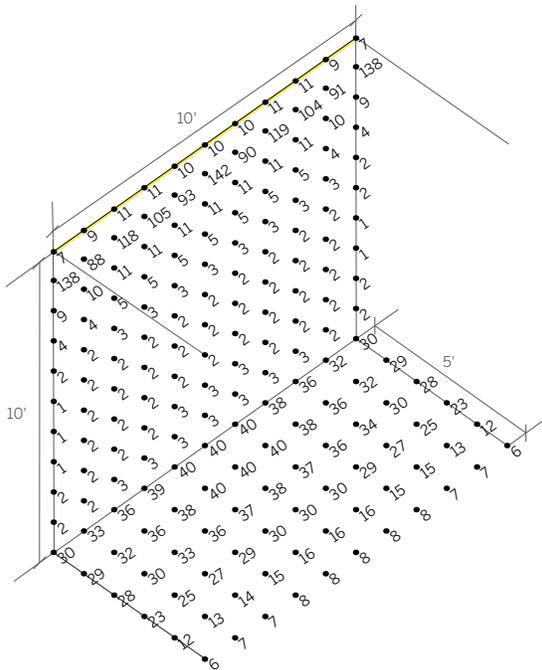

WG-20LPRSG-...-S-...-H-935-LL45W-W
10'-0" ceiling height
Satin opal diffuser and soft gaze

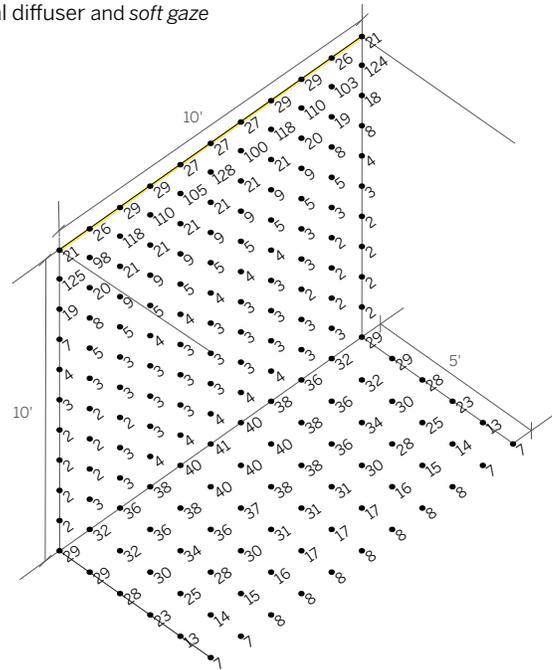

Power Multiplier			
	L [3 W/ft]	M [6 W/ft]	H [10 W/ft]
9XX	0.29	0.57	1.00
WD	0.17	0.35	0.51
RGBW	-	0.29	-

Power Multiplier				
	P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]
TW1840	0.21	0.41	0.76	1.17
TW2765	0.21	0.40	0.75	1.17

CCT Multiple				
	927	930	935	940
	0.77	0.84	1.00	1.19

- 1 Polar Plot is applicable to part number noted; use Multiplication Factor table to approximate other models or refer to online photometry.
- 2 WD lumen data at maximum output (3000K).
- 3 RGBW lumen data at maximum output with 3000K White LED.
- 4 UGR value noted is the maximum UGR (crosswise) with 935 LEDs / 48" length.