
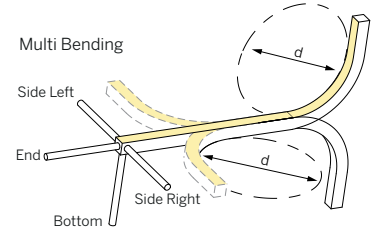


# FLEX 10x10 MULTI HONEYCOMB

0.39x0.39"

STATIC WHITE



SPECIFICATION	
<b>MATERIAL</b>	Silicone
<b>MOUNTING</b>	Surface
<b>IP RATING</b>	IP67, IP20
<b>BINNING</b>	3 Step
<b>LIFETIME (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data
<b>DRIVER REQUIREMENT</b>	24VDC Constant voltage
<b>PROTECTION</b>	UV, flame, salt and chlorine resistant
<b>WARRANTY</b>	5 Years

## DRIVERS STATIC WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >7.9" / 200 mm)

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

	Cut Interval	DELIVERED LUMENS lm/ft						
		1800K	2400K	2700K	3000K	3500K	4000K	6000K
<b>S05</b>	55.56 mm (2.2")	10	13	14	15	15	16	15
<b>S10</b>	55.56 mm (2.2")	20	26	28	30	30	32	31

ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
<b>63S1010HCM</b> Flex 10x10 Multi Honeycomb	2 Black	<b>C18</b> 1800K	<b>S05</b> 5 W/m (6m max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft)	.XXXX Length in inches	<b>D010</b> <b>EL96</b> <b>DPH</b> <b>L3D0E</b> <b>DALI-DT6</b> <b>UNV96-WL</b> <b>UNV384-WL</b>	
		<b>C24</b> 2400K	1.5 W/ft (19.7ft max.)			<b>010</b> 1m (3.3ft)			
		<b>C27</b> 2700K	<b>S10</b> 10 W/m (4m max.)			<b>030</b> 3m (9.8ft)			
		<b>C30</b> 3000K	3 W/ft (13.1ft max.)			<b>050</b> 5m (16.4ft)			
		<b>C35</b> 3500K				<b>100</b> 10m (32.8ft)			
		<b>C40</b> 4000K							
<b>C60</b> 6000K									
<b>63S1010HCM</b>	<b>2</b>								

## STATIC WHITE - HIGH OUTPUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >7.9" / 200 mm)

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

	Cut Interval	DELIVERED LUMENS lm/ft						
		1800K	2400K	2700K	3000K	3500K	4000K	6000K
<b>S10</b>	55.56 mm (2.2")	23	29	32	34	35	37	35

ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
<b>63S1010HCHOM</b> Flex 10x10 Multi Honeycomb High Output	2 Black	<b>C18</b> 1800K	<b>S10</b> 10 W/m (4m max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft)	.XXXX Length in inches	<b>D010</b> <b>EL96</b> <b>DPH</b> <b>L3D0E</b> <b>DALI-DT6</b> <b>UNV96-WL</b> <b>UNV384-WL</b>	
		<b>C24</b> 2400K	3 W/ft (13.1ft max.)			<b>010</b> 1m (3.3ft)			
		<b>C27</b> 2700K				<b>030</b> 3m (9.8ft)			
		<b>C30</b> 3000K				<b>050</b> 5m (16.4ft)			
		<b>C35</b> 3500K				<b>100</b> 10m (32.8ft)			
		<b>C40</b> 4000K							
<b>C60</b> 6000K									
<b>63S1010HCHOM</b>	<b>2</b>		<b>S10</b>						

# FLEX 10x10 MULTI HONEYCOMB

0.39x0.39"


## ACCESSORIES

STATIC  
WHITE

**TYPE** Aluminum profile  
**MOUNTING** Surface mount


### ORDERING INFORMATION

MODEL	FINISH	LENGTH
<b>63S1010X</b>	<b>5AP</b> Silver	<b>0030</b> 30mm (1.18")
	<b>2AP</b> Black	<b>1000</b> 1000mm (39.37")
		<b>2000</b> 2000mm (78.74")
<b>63S1010X</b>		

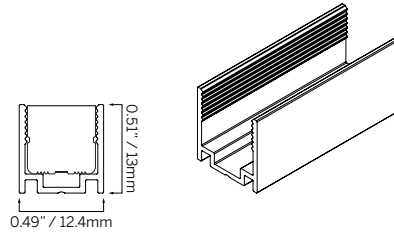

30

1000/2000

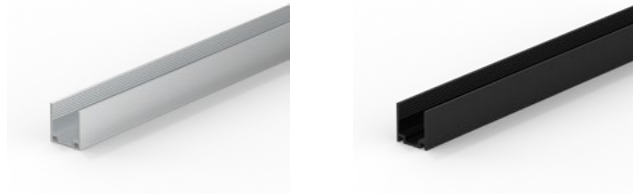


DRIVERS

IES  
FILES

**TYPE** Stainless Mounting Clip  
**MOUNTING** Surface mount

### ORDERING INFORMATION

MODEL	FINISH	LENGTH
<b>63S1010X</b>	<b>5SC</b> Silver	<b>0030</b> 30mm (1.18")
	<b>2SC</b> Black	
<b>63S1010X</b>		<b>0030</b>

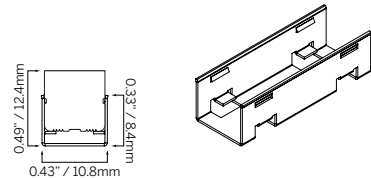

ACCESSORIES

**TYPE** Stainless Bendable Profile  
**MOUNTING** Surface mount

### ORDERING INFORMATION

MODEL	FINISH	LENGTH
<b>63S1010X</b>	<b>5SC</b> Silver	<b>1000</b> 1000mm (39.37")
	<b>2SC</b> Black	
<b>63S1010X</b>		<b>1000</b>

