

FLEX 10x10 VERTICAL




0.39x0.39"

STATIC WHITE

FREE CUT

TUNABLE WHITE

WARM DIM

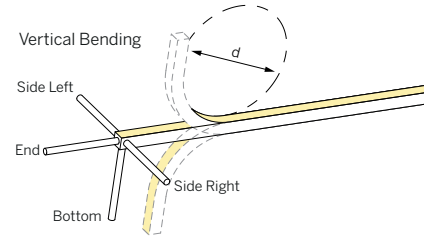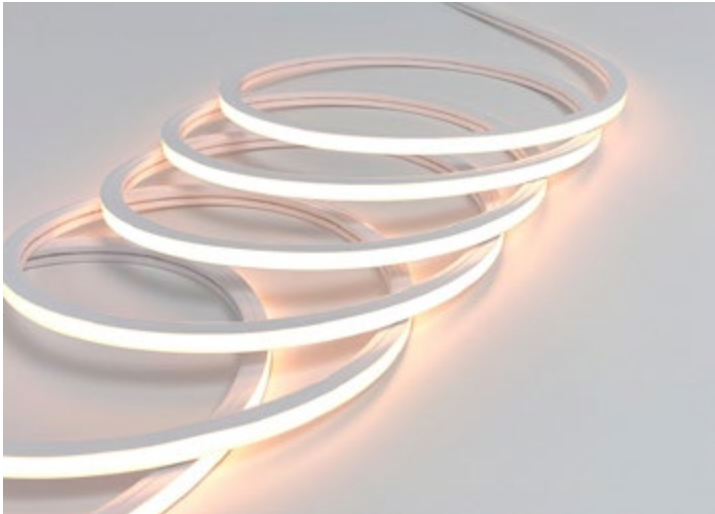

SPECIFICATION

MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS

STATIC WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >3.9" / 100 mm)

IES FILES

DRIVER OPTIONS (See driver page for details)

D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
S05 50 mm (2")	71	92	101	109	111	114	112
S10 50 mm (2")	136	177	194	208	213	219	216
L05 50 mm (2")	71	92	101	109	111	114	112
L10 50 mm (2")	136	177	194	208	213	219	216

ACCESSORIES

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1010V Flex 10x10 Vertical	1 White	C18 1800K	S05 5 W/m (10m max.)	E End	7 IP67	003 0.3m (1ft)	.XXXX Length in inches	D010
		C24 2400K	1.5 W/ft (32.8ft max.)	B Bottom	2 IP20	010 1m (3.3ft)		EL96
		C27 2700K	S10 10 W/m (5m max.)	SL Side Left		030 3m (9.8ft)		DPH
		C30 3000K	3 W/ft (16.4ft max.)	SR Side Right		050 5m (16.4ft)		L3D0E
		C35 3500K	L05 5 W/m (16m max.)			100 10m (32.8ft)		DALI-DT6
		C40 4000K	1.5 W/ft (52.5ft max.)					UNV96-WL
		C60 6000K	L10 10 W/m (8m max.)					UNV384-WL
		3 W/ft (26.2ft max.)						
63S1010V	1							

STATIC WHITE - HIGH OUTPUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >3.9" / 100 mm)

DRIVER OPTIONS (See driver page for details)

D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
S10 62.5 mm (2.5")	208	272	294	319	326	326	331




ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1010HOV Flex 10x10 Vertical High Output	1 White	C18 1800K	S10 10 W/m (7m max.)	E End	7 IP67	003 0.3m (1ft)	.XXXX Length in inches	D010
		C24 2400K	3 W/ft (23ft max.)	B Bottom	2 IP20	010 1m (3.3ft)		EL96
		C27 2700K		SL Side Left		030 3m (9.8ft)		DPH
		C30 3000K		SR Side Right		050 5m (16.4ft)		L3D0E
		C35 3500K				100 10m (32.8ft)		DALI-DT6
		C40 4000K						UNV96-WL
		C60 6000K						UNV384-WL
63S1010HOV	1		S10					

FLEX 10x10 VERTICAL

0.39x0.39"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM

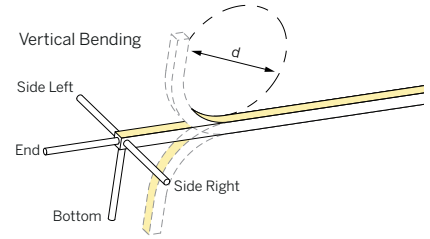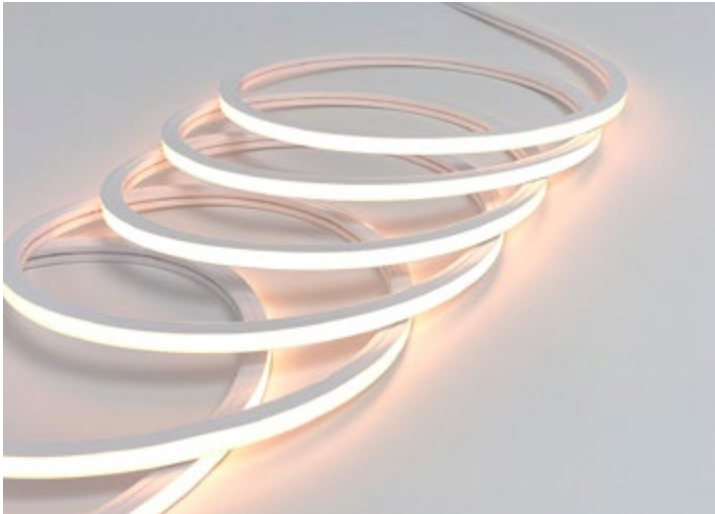

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS **STATIC WHITE FREE CUT (CRI >90 Ra)**
 SPECIFICATION (MINIMUM BEND DIAMETER >3.9" / 100 mm)

- IES FILES

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
SF05 Free Cut	61	80	93	94	96	104	98
SF10 Free Cut	119	156	182	183	187	202	190

- ACCESSORIES

ORDERING INFORMATION								
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1010V Flex 10x10 Vertical	1 White	C18 1800K	SF05 5 W/m (11m max.) 1.5 W/ft (36.1ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft)	.XXXX Length in inches	D010 EL96 DPH L3D0E DALI-DT6 UNV96-WL UNV384-WL
		C24 2400K				010 1m (3.3ft)		
		C27 2700K	SF10 10 W/m (7m max.) 3 W/ft (23ft max.)			030 3m (9.8ft)		
		C30 3000K				050 5m (16.4ft)		
		C35 3500K				100 10m (32.8ft)		
		C40 4000K						
C60 6000K								
63S1010V	1							

FLEX 10x10 VERTICAL

0.39x0.39"






STATIC WHITE

FREE CUT

TUNABLE WHITE

WARM DIM

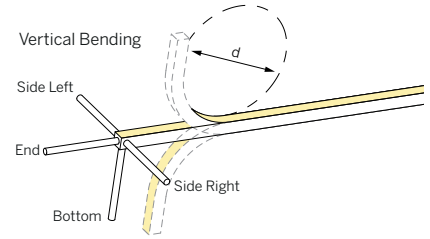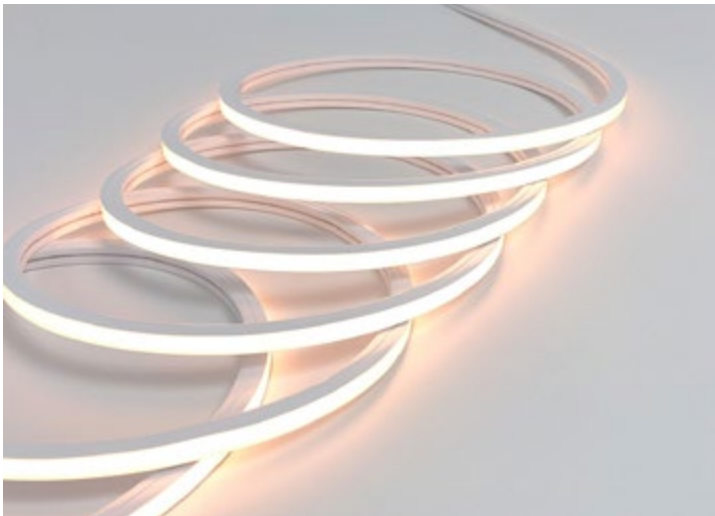

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS

TUNABLE WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >3.9" / 100 mm)

IES FILES

DRIVER OPTIONS (See driver page for details)

DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
DALI-DT8 = eldoLED DALI (DT8), 0.1% dimming, 120-277V

	Cut Interval	DELIVERED LUMENS lm/ft						
		1800K	2400K	2700K	3000K	3500K	4000K	6000K
CT08	50 mm (2")	90	126	138	145	146	148	143

ACCESSORIES




ORDERING INFORMATION

MODEL	JACKET	CCT (LOW)	CCT (HIGH)	LED TYPE*	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1010V Flex 10x10 Vertical	1 White	C18 1800K	24 2400K	CT08 2x8 W/m (5m max.) 2x2.4 W/ft (16.4ft max.) <small>*Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.</small>	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft)	.XXXX Length in inches	DALI-DT6 DALI-DT8
		C24 2400K	27 2700K				010 1m (3.3ft)		
		C27 2700K	30 3000K				030 3m (9.8ft)		
		C30 3000K	35 3500K				050 5m (16.4ft)		
		C35 3500K	40 4000K				100 10m (32.8ft)		
63S1010V	1			CT08					

FLEX 10x10 VERTICAL

0.39x0.39"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM

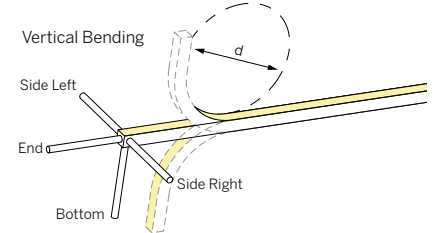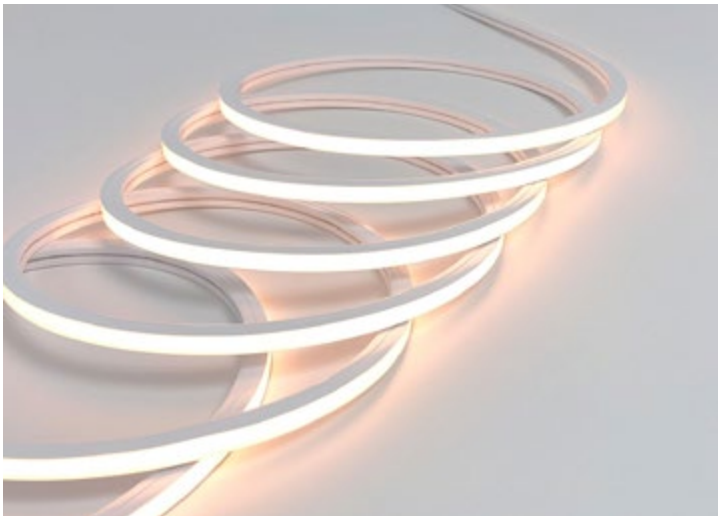

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS **WARM DIM (CRI >90 Ra)**
 SPECIFICATION (MINIMUM BEND DIAMETER >3.9" / 100 mm)

DRIVER OPTIONS (See driver page for details)

MAGSDM96-WD = 0-10V / Phase Dim 96W, 0.1% CCR Dimming for Warm Dim, 120-277V (Phase - 120V only)
--

	DELIVERED LUMENS lm/ft		
	Cut Interval	2700K	3000K
10R	50 mm (2")	148	160

ACCESSORIES ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1010V Flex 10x10 Vertical	1 White	C2718W 2700-1800K C3018W 3000-1800K	10R 10 W/m (5m max.) 3 W/ft (16.4ft max.)	E End	7 IP67	003 0.3m (1ft)	.XXXX Length in inches	MAGSDM96-WD
				B Bottom	2 IP20	010 1m (3.3ft)		
				SL Side Left		030 3m (9.8ft)		
				SR Side Right		050 5m (16.4ft)		
						100 10m (32.8ft)		
63S1010V	1		10R				MAGSDM96-WD	

FLEX 10x10 VERTICAL

0.39x0.39"

ACCESSORIES

STATIC WHITE

TYPE Aluminum profile
MOUNTING Surface mount


FREE CUT

ORDERING INFORMATION

MODEL	FINISH	LENGTH
63S1010X	5AP Silver	0030 30mm (1.18")
	2AP Black	1000 1000mm (39.37")
		2000 2000mm (78.74")
63S1010X		

TUNABLE WHITE

WARM DIM

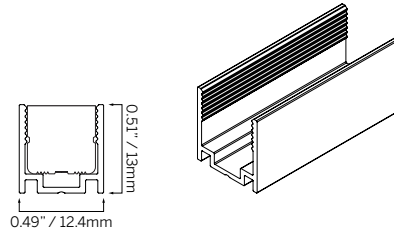

30

1000/2000



DRIVERS

IES FILES

TYPE Stainless Mounting Clip
MOUNTING Surface mount

ACCESSORIES

ORDERING INFORMATION

MODEL	FINISH	LENGTH
63S1010X	5SC Silver	0030 30mm (1.18")
	2SC Black	
63S1010X		0030



TYPE Stainless Bendable Profile
MOUNTING Surface mount

ORDERING INFORMATION

MODEL	FINISH	LENGTH
63S1010X	5SC Silver	1000 1000mm (39.37")
	2SC Black	
63S1010X		1000

