



# FLEX 10x10 VERTICAL BLACK

0.39x0.39"

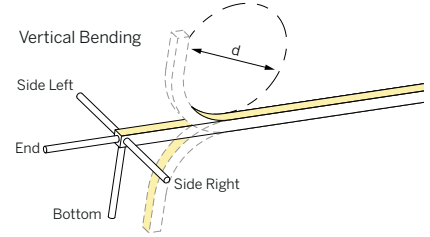

STATIC WHITE



SPECIFICATION	
<b>MATERIAL</b>	Silicone
<b>MOUNTING</b>	Surface
<b>IP RATING</b>	IP67, IP20
<b>BINNING</b>	3 Step
<b>LIFETIME (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data
<b>DRIVER REQUIREMENT</b>	24VDC Constant voltage
<b>PROTECTION</b>	UV, flame, salt and chlorine resistant
<b>WARRANTY</b>	5 Years

**DRIVERS** **STATIC WHITE FREE CUT (CRI >90 Ra)**  
 SPECIFICATION (MINIMUM BEND DIAMETER >3.9" / 100 mm)

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	5500K
<b>SF05</b> Free Cut	7	9	10	10	10	11	11
<b>SF10</b> Free Cut	13	16	20	20	20	21	20

**ACCESSORIES** ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S1010V</b> Flex 10x10 Vertical	2 Black	<b>C18</b> 1800K	<b>SF05</b> 5 W/m (11m max.) 1.5 W/ft (36.1ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft)	.XXXX Length in inches	<b>D010</b> <b>EL96</b> <b>DPH</b> <b>L3D0E</b> <b>DALI-DT6</b> <b>UNV96-WL</b> <b>UNV384-WL</b>
		<b>C24</b> 2400K				<b>010</b> 1m (3.3ft)		
		<b>C27</b> 2700K	<b>030</b> 3m (9.8ft)					
		<b>C30</b> 3000K	<b>050</b> 5m (16.4ft)					
		<b>C35</b> 3500K	<b>100</b> 10m (32.8ft)					
		<b>C40</b> 4000K						
<b>C55</b> 5500K								
<b>63S1010V</b>	<b>2</b>							

# FLEX 10x10 VERTICAL BLACK


0.39x0.39"

STATIC  
WHITE


## ACCESSORIES

**TYPE** Aluminum profile  
**MOUNTING** Surface mount


ORDERING INFORMATION		
MODEL	FINISH	LENGTH
<b>63S1010X</b>	<b>5AP</b> Silver	<b>0030</b> 30mm (1.18")
	<b>2AP</b> Black	<b>1000</b> 1000mm (39.37")
		<b>2000</b> 2000mm (78.74")
<b>63S1010X</b>		

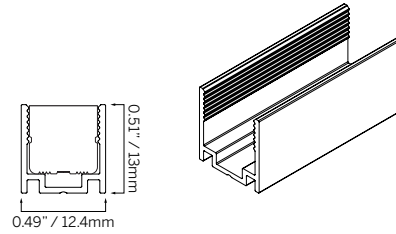

30

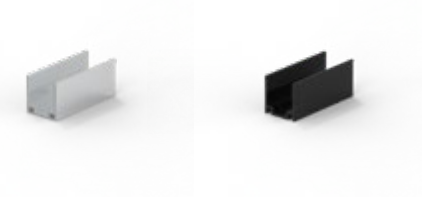

1000/2000

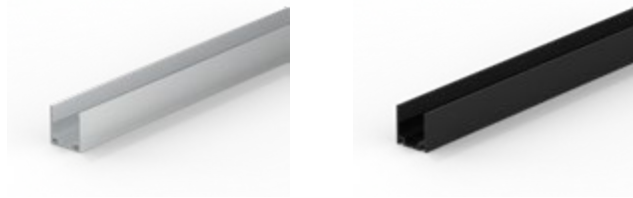


DRIVERS

IES  
FILES

**TYPE** Stainless Mounting Clip  
**MOUNTING** Surface mount

ORDERING INFORMATION		
MODEL	FINISH	LENGTH
<b>63S1010X</b>	<b>5SC</b> Silver	<b>0030</b> 30mm (1.18")
	<b>2SC</b> Black	
<b>63S1010X</b>		<b>0030</b>

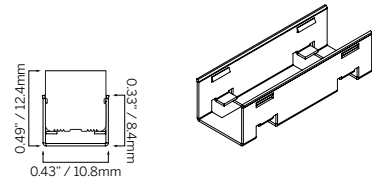

ACCESSORIES

**TYPE** Stainless Bendable Profile  
**MOUNTING** Surface mount

ORDERING INFORMATION		
MODEL	FINISH	LENGTH
<b>63S1010X</b>	<b>5SC</b> Silver	<b>1000</b> 1000mm (39.37")
	<b>2SC</b> Black	
<b>63S1010X</b>		<b>1000</b>

