



FLEX 10x10 VERTICAL DARK LINE

0.39x0.39"

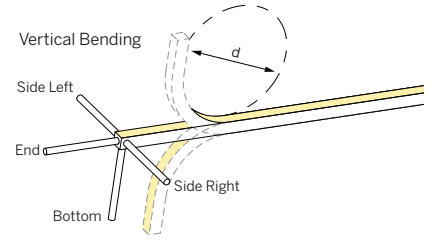

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM



SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS STATIC WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >3.9" / 100 mm)

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
S05 50 mm (2")	25	33	36	39	40	41	40
S10 50 mm (2")	49	63	69	74	76	78	77
L05 50 mm (2")	25	33	36	39	40	41	40
L10 50 mm (2")	49	63	69	74	76	78	77

ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
63S1010DLV Flex 10x10 Vertical Dark Line	2 Black	C18 1800K	S05 5 W/m (10m max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft)	.XXXX Length in inches	D010 EL96 DPH L3D0E DALI-DT6 UNV96-WL UNV384-WL	
		C24 2400K	1.5 W/ft (32.8ft max.)			010 1m (3.3ft)			
		C27 2700K	S10 10 W/m (5m max.)			030 3m (9.8ft)			
		C30 3000K	3 W/ft (16.4ft max.)			050 5m (16.4ft)			
		C35 3500K	L05 5 W/m (16m max.)			100 10m (32.8ft)			
		C40 4000K	1.5 W/ft (52.5ft max.)						
		C60 6000K	L10 10 W/m (8m max.)						
		3 W/ft (26.2ft max.)							
63S1010DLV	2								

DRIVERS STATIC WHITE - HIGH OUTPUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >3.9" / 100 mm)

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
S10 62.5mm (2.5")	74	97	105	115	116	116	118

ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
63S2018DLHOV Flex 10x10 Vertical Dark Line High Output	2 Black	C18 1800K	S10 10 W/m (5m max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft)	.XXXX Length in inches	D010 EL96 DPH L3D0E DALI-DT6 UNV96-WL UNV384-WL	
		C24 2400K	3 W/ft (16.4ft max.)			010 1m (3.3ft)			
		C27 2700K				030 3m (9.8ft)			
		C30 3000K				050 5m (16.4ft)			
		C35 3500K				100 10m (32.8ft)			
		C40 4000K							
		C60 6000K							
63S2018DLHOV	2		S10						

Powered by



410 381 1497 inter-lux.com answers@inter-lux.com
Inter-lux reserves the right to make technical changes without notice.



updated 4.2026

FLEX 10x10 VERTICAL DARK LINE

0.39x0.39"



- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM

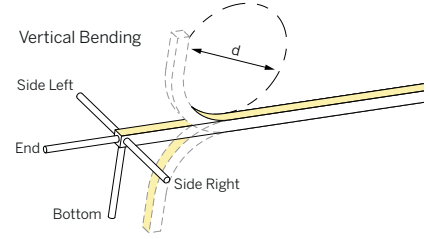

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS STATIC WHITE FREE CUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >3.9" / 100 mm)

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V



Cut Interval	DELIVERED LUMENS lm/ft							
	1800K	2400K	2700K	3000K	3500K	4000K	6000K	
SF05 Free Cut	22	29	33	34	34	37	35	
SF10 Free Cut	43	55	65	66	67	72	68	

ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
63S1010DLV Flex 10x10 Vertical Dark Line	2 Black	C18 1800K	SF05 5 W/m (11m max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft)	.XXXX Length in inches	D010 EL96 DPH L3D0E DALI-DT6 UNV96-WL UNV384-WL	
		C24 2400K	1.5 W/ft (36.1ft max.)			010 1m (3.3ft)			
		C27 2700K	SF10 10 W/m (7m max.)			030 3m (9.8ft)			
		C30 3000K	3 W/ft (23ft max.)			050 5m (16.4ft)			
		C35 3500K				100 10m (32.8ft)			
		C40 4000K							
C60 6000K									
63S1010DLV	2								

FLEX 10x10 VERTICAL DARK LINE

0.39x0.39"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM

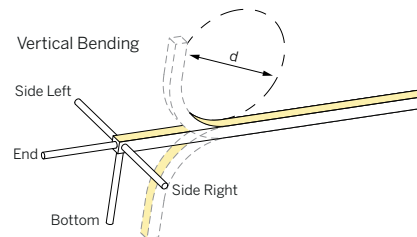

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS **TUNABLE WHITE (CRI >90 Ra)**
 SPECIFICATION (MINIMUM BEND DIAMETER >3.9" / 100 mm)

DRIVER OPTIONS (See driver page for details)

DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
DALI-DT8 = eldoLED DALI (DT8), 0.1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
CT08 50 mm (2")	32	45	49	52	52	53	51

ACCESSORIES **ORDERING INFORMATION**



MODEL	JACKET	CCT (LOW)	CCT (HIGH)	LED TYPE*	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1010DLV Flex 10x10 Vertical Dark Line	2 Black	C18 1800K	24 2400K	CT08 2x8 W/m (5m max.) 2x2.4 W/ft (16.4ft max.) <small>* Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.</small>	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft)	.XXXX Length in inches	DALI-DT6 DALI-DT8
		C24 2400K	27 2700K				010 1m (3.3ft)		
		C27 2700K	30 3000K				030 3m (9.8ft)		
		C30 3000K	35 3500K				050 5m (16.4ft)		
		C35 3500K	40 4000K				100 10m (32.8ft)		
		C40 4000K	60 6000K						
63S1010DLV	2			CT08					

FLEX 10x10 VERTICAL DARK LINE

0.39x0.39"



- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM

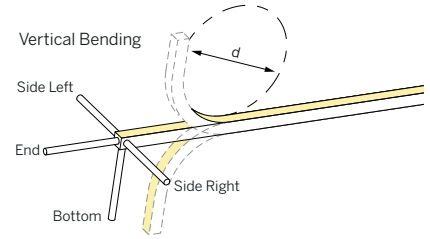

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS WARM DIM (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >3.9" / 100 mm)

DRIVER OPTIONS (See driver page for details)	
IES FILES	MAGSDM96-WD = 0-10V / Phase Dim 96W, 0.1% CCR Dimming for Warm Dim, 120-277V (Phase - 120V only)

	Cut Interval	DELIVERED LUMENS lm/ft	
		2700K	3000K
10R	50 mm (2")	52	57

ACCESSORIES ORDERING INFORMATION										
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH			DRIVERS
63S1010DLV Flex 10x10 Vertical Dark Line	1 White	C2718W	2700-1800K	10R 10 W/m (5m max.) 3 W/ft (16.4ft max.)	E End	7 IP67	003 0.3m (1ft)	.XXXX Length in inches		MAGSDM96-WD
		C3018W	3000-1800K		B Bottom	2 IP20	010 1m (3.3ft)			
					SL Side Left		030 3m (9.8ft)			
					SR Side Right		050 5m (16.4ft)			
							100 10m (32.8ft)			
63S1010DLV	1		10R							MAGSDM96-WD

FLEX 10x10 VERTICAL DARK LINE

0.39x0.39"

ACCESSORIES

STATIC
WHITE

TYPE Aluminum profile
MOUNTING Surface mount


FREE
CUT

ORDERING INFORMATION

MODEL	FINISH	LENGTH
63S1010X	5AP Silver	0030 30mm (1.18")
	2AP Black	1000 1000mm (39.37")
		2000 2000mm (78.74")
63S1010X		


TUNABLE
WHITE

WARM
DIM

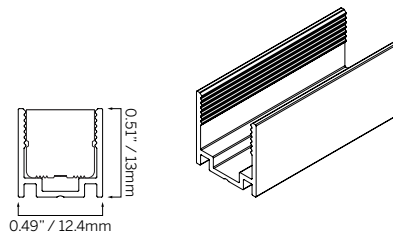

30

1000/2000

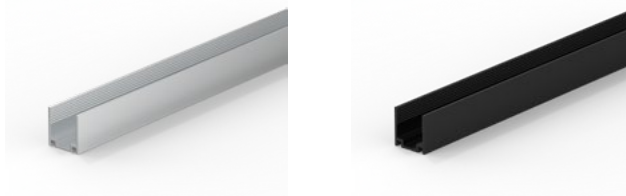

DRIVERS


IES
FILES

TYPE Stainless Mounting Clip
MOUNTING Surface mount

ACCESSORIES

ORDERING INFORMATION

MODEL	FINISH	LENGTH
63S1010X	5SC Silver	0030 30mm (1.18")
	2SC Black	
63S1010X		0030

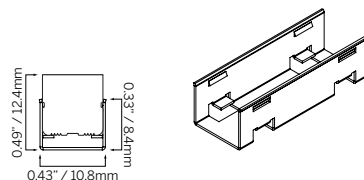

TYPE Stainless Bendable Profile
MOUNTING Surface mount

ORDERING INFORMATION

MODEL	FINISH	LENGTH
63S1010X	5SC Silver	1000 1000mm (39.37")
	2SC Black	
63S1010X		1000

