



# FLEX 10x10 VERTICAL HONEYCOMB

0.39x0.39"

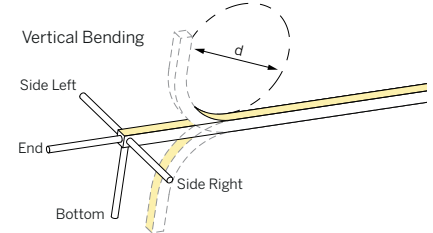

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM



SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

## DRIVERS STATIC WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >3.9" / 100 mm)

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft							
	1800K	2400K	2700K	3000K	3500K	4000K	6000K	
S05 50 mm (2")	9	12	12	13	13	14	14	
S10 50 mm (2")	16	22	24	26	26	27	26	
L05 50 mm (2")	9	12	12	13	13	14	14	
L10 50 mm (2")	16	22	24	26	26	27	26	

ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
63S1010HCV Flex 10x10 Vertical Honeycomb	2 Black	C18 1800K	S05 5 W/m (10m max.)	E End	7 IP67	003 0.3m (1ft)	.XXXX Length in inches	D010 EL96 DPH L3D0E DALI-DT6 UNV96-WL UNV384-WL	
		C24 2400K	S10 1.5 W/ft (32.8ft max.)	B Bottom	2 IP20	010 1m (3.3ft)			
		C27 2700K	S10 10 W/m (5m max.)	SL Side Left		030 3m (9.8ft)			
		C30 3000K	S10 3 W/ft (16.4ft max.)	SR Side Right		050 5m (16.4ft)			
		C35 3500K	L05 5 W/m (16m max.)			100 10m (32.8ft)			
		C40 4000K	L05 1.5 W/ft (52.5ft max.)						
		C60 6000K	L10 10 W/m (8m max.) 3 W/ft (26.2ft max.)						
63S1010HCV	2								

## DRIVERS STATIC WHITE - HIGH OUTPUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >3.9" / 100 mm)

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft							
	1800K	2400K	2700K	3000K	3500K	4000K	6000K	
S10 62.5mm (2.5")	26	34	36	39	40	40	41	



ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
63S1010HCHOV Flex 10x10 Vertical Honeycomb High Output	2 Black	C18 1800K	S10 10 W/m (7m max.)	E End	7 IP67	003 0.3m (1ft)	.XXXX Length in inches	D010 EL96 DPH L3D0E DALI-DT6 UNV96-WL UNV384-WL	
		C24 2400K	S10 3 W/ft (23ft max.)	B Bottom	2 IP20	010 1m (3.3ft)			
		C27 2700K		SL Side Left		030 3m (9.8ft)			
		C30 3000K		SR Side Right		050 5m (16.4ft)			
		C35 3500K				100 10m (32.8ft)			
		C40 4000K							
		C60 6000K							
63S1010HCHOV	2		S10						

# FLEX 10x10 VERTICAL HONEYCOMB

0.39x0.39"



- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM

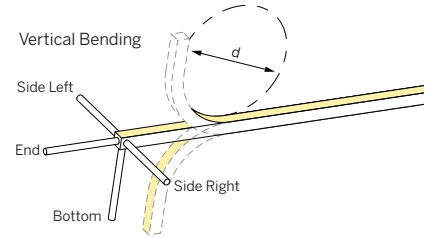

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

## DRIVERS STATIC WHITE FREE CUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >3.9" / 100 mm)

- DRIVERS
- IES FILES

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
SF05 Free Cut	7	10	11	12	12	13	12
SF10 Free Cut	15	19	22	23	23	24	23

- ACCESSORIES

ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
<b>63S1010HCV</b> Flex 10x10 Vertical Honeycomb	<b>2</b> Black	<b>C18</b> 1800K	<b>SF05</b> 5 W/m (11m max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft)	.XXXX Length in inches	<b>D010</b> <b>EL96</b> <b>DPH</b> <b>L3D0E</b> <b>DALI-DT6</b> <b>UNV96-WL</b> <b>UNV384-WL</b>	
		<b>C24</b> 2400K	1.5 W/ft (36.1ft max.)			<b>010</b> 1m (3.3ft)			
		<b>C27</b> 2700K	<b>SF10</b> 10 W/m (7m max.)			<b>030</b> 3m (9.8ft)			
		<b>C30</b> 3000K	3 W/ft (23ft max.)			<b>050</b> 5m (16.4ft)			
		<b>C35</b> 3500K				<b>100</b> 10m (32.8ft)			
		<b>C40</b> 4000K							
<b>C60</b> 6000K									
<b>63S1010HCV</b>	<b>2</b>								





# FLEX 10x10 VERTICAL HONEYCOMB

0.39x0.39"



- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM

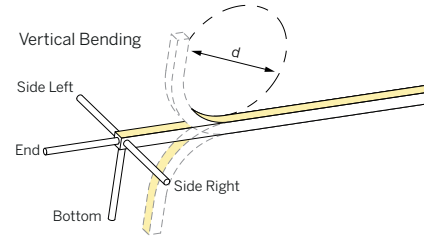

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

**DRIVERS** **TUNABLE WHITE (CRI >90 Ra)**  
SPECIFICATION (MINIMUM BEND DIAMETER >3.9" / 100 mm)

**DRIVER OPTIONS (See driver page for details)**

DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
DALI-DT8 = eldoLED DALI (DT8), 0.1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
<b>CT08</b> 50 mm (2")	11	15	17	18	18	18	18

**ACCESSORIES** ORDERING INFORMATION



MODEL	JACKET	CCT (LOW)	CCT (HIGH)	LED TYPE*	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S1010HCV</b> Flex 10x10 Vertical Honeycomb	<b>2</b> Black	<b>C18</b> 1800K	<b>24</b> 2400K	<b>CT08</b> 2x8 W/m (6m max.) 2x2.4 W/ft (19.7ft max.) <small>* Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.</small>	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft)	<b>.XXXX</b> Length in inches	<b>DALI-DT6</b> <b>DALI-DT8</b>
		<b>C24</b> 2400K	<b>27</b> 2700K				<b>010</b> 1m (3.3ft)		
		<b>C27</b> 2700K	<b>30</b> 3000K				<b>030</b> 3m (9.8ft)		
		<b>C30</b> 3000K	<b>35</b> 3500K				<b>050</b> 5m (16.4ft)		
		<b>C35</b> 3500K	<b>40</b> 4000K				<b>100</b> 10m (32.8ft)		
<b>C40</b> 4000K	<b>60</b> 6000K								
<b>63S1010HCV</b>	<b>2</b>			<b>CT08</b>					

# FLEX 10x10 VERTICAL HONEYCOMB

0.39x0.39"



- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM

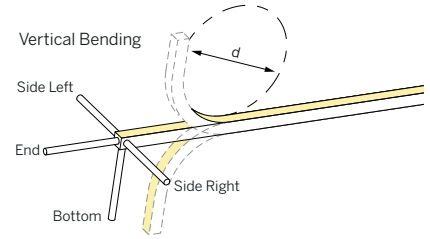

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

## DRIVERS WARM DIM (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >3.9" / 100 mm)

DRIVER OPTIONS (See driver page for details)	
IES FILES	MAGSDM96-WD = 0-10V / Phase Dim 96W, 0.1% CCR Dimming for Warm Dim, 120-277V (Phase - 120V only)

	Cut Interval	DELIVERED LUMENS lm/ft	
		2700K	3000K
10R	50 mm (2")	18	20

ACCESSORIES ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
63S1010HCV Flex 10x10 Vertical Honeycomb	2 Black	C2718W	2700-1800K	10R 10 W/m (5m max.) 3 W/ft (16.4ft max.)	E End	7 IP67	003 0.3m (1ft)	.XXXX Length in inches	MAGSDM96-WD
		C3018W	3000-1800K		B Bottom	2 IP20	010 1m (3.3ft)		
					SL Side Left		030 3m (9.8ft)		
					SR Side Right		050 5m (16.4ft)		
							100 10m (32.8ft)		
63S1010HCV	2		10R					MAGSDM96-WD	

# FLEX 10x10 VERTICAL HONEYCOMB

0.39x0.39"

## ACCESSORIES

STATIC WHITE


**TYPE** Aluminum profile  
**MOUNTING** Surface mount

FREE CUT

ORDERING INFORMATION		
MODEL	FINISH	LENGTH
<b>63S1010X</b>	<b>5AP</b> Silver	<b>0030</b> 30mm (1.18")
	<b>2AP</b> Black	<b>1000</b> 1000mm (39.37")
		<b>2000</b> 2000mm (78.74")
<b>63S1010X</b>		


TUNABLE WHITE

WARM DIM

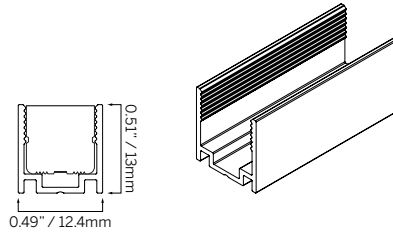

30

1000/2000

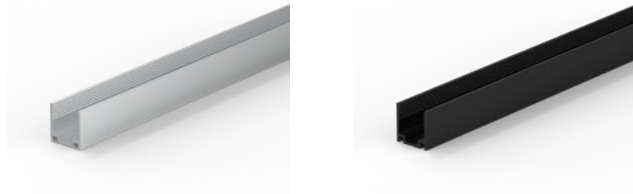


DRIVERS

IES FILES

**TYPE** Stainless Mounting Clip  
**MOUNTING** Surface mount

ACCESSORIES

ORDERING INFORMATION		
MODEL	FINISH	LENGTH
<b>63S1010X</b>	<b>5SC</b> Silver	<b>0030</b> 30mm (1.18")
	<b>2SC</b> Black	
<b>63S1010X</b>		<b>0030</b>

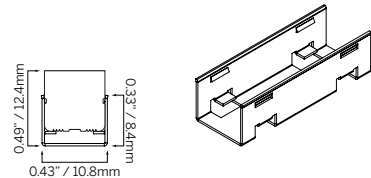

**TYPE** Stainless Bendable Profile  
**MOUNTING** Surface mount

ORDERING INFORMATION		
MODEL	FINISH	LENGTH
<b>63S1010X</b>	<b>5SC</b> Silver	<b>1000</b> 1000mm (39.37")
	<b>2SC</b> Black	
<b>63S1010X</b>		<b>1000</b>

