



FLEX 15x15 HORIZONTAL BLACK

0.6X0.6"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM



Horizontal Bending

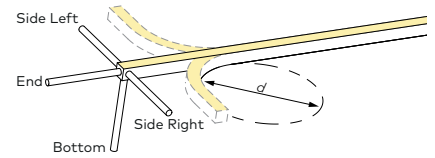

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS STATIC WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 250 mm)

- DRIVERS
- IES FILES

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
S05 50 mm (2")	5	6	7	7	7	7	7
S10 50 mm (2")	9	12	13	14	14	15	15

ACCESSORIES ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1515H Flex 15x15 Horizontal	2 Black	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K C60 6000K	S05 5 W/m (16m max.) 1.5 W/ft (52.5ft max.) S10 10 W/m (8m max.) 3 W/ft (26.2ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	D010 EL96 DPH L3D0E DALI-DT6 UNV96-WL UNV384-WL
63S1515H	2							

DRIVERS STATIC WHITE - HIGH OUTPUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 250 mm)

- DRIVERS
- IES FILES

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
S10 62.5 mm (2.5")	14	18	20	22	22	22	23


ACCESSORIES ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1515HOH Flex 15x15 Horizontal High Output	2 Black	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K C60 6000K	S10 10 W/m (7m max.) 3 W/ft (23ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	D010 EL96 DPH L3D0E DALI-DT6 UNV96-WL UNV384-WL
63S1515HOH	2		S10					


FLEX 15x15 HORIZONTAL BLACK

0.6X0.6"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM



Horizontal Bending

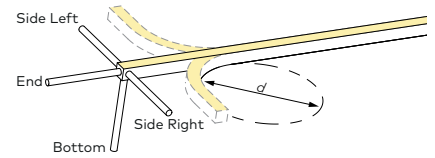

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS STATIC WHITE FREE CUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 250 mm)

- IES FILES

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
SF05 Free Cut	4	5	6	6	7	7	7
SF10 Free Cut	8	10	12	12	12	13	13


- ACCESSORIES

ORDERING INFORMATION								
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1515H Flex 15x15 Horizontal	2 Black	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K C60 6000K	SF05 5 W/m (11m max.) 1.5 W/ft (36.1ft max.) SF10 10 W/m (7m max.) 3 W/ft (23ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	D010 EL96 DPH L3D0E DALI-DT6 UNV96-WL UNV384-WL
63S1515H	2							


FLEX 15x15 HORIZONTAL BLACK

0.6X0.6"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM



Horizontal Bending

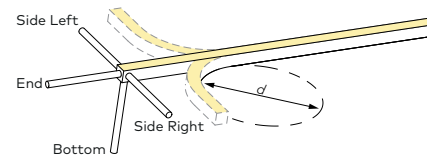

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS TUNABLE WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)	
IES FILES	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
	DALI-DT8 = eldoLED DALI (DT8), 0.1% dimming, 120-277V


Cut Interval	DELIVERED LUMENS lm/ft							
	1800K	2400K	2700K	3000K	3500K	4000K	6000K	
CT08 50 mm (2")	6	9	9	10	10	10	9	

ORDERING INFORMATION												
MODEL	JACKET	CCT (LOW)	CCT (HIGH)	LED TYPE*	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS			
63S1515H Flex 15x15 Horizontal	2 Black	C18	1800K	24	2400K	CT08 2x8 W/m (5m max.) 2x2.4 W/ft (16ft max.) <small>* Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.</small>	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003	0.3m (1ft)	.XXXX Length in inches	DALI-DT6 DALI-DT8
		C24	2400K	27	2700K				010	1m (3.3ft)		
		C27	2700K	30	3000K				030	3m (9.8ft)		
		C30	3000K	35	3500K				050	5m (16.4ft)		
		C35	3500K	40	4000K				100	10m (32.8ft)		
63S1515H	2			CT08								


FLEX 15x15 HORIZONTAL BLACK

0.6X0.6"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM



Horizontal Bending

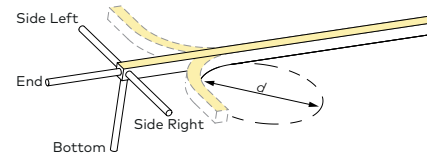

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS WARM DIM (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)	
IES FILES	MAGSDM96-WD = 0-10V / Phase Dim 96W, 0.1% CCR Dimming for Warm Dim, 120-277V (Phase - 120V only)

Cut Interval	DELIVERED LUMENS lm/ft		
	2700K	3000K	
12R	50 mm (2")	10	10

ORDERING INFORMATION										
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH			DRIVERS
63S1515H Flex 15x15 Horizontal	2 Black	C2718W 2700-1800K	12R 12 W/m (5m max.) 3.7 W/ft (16ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft)	.XXXX Length in inches			MAGSDM96-WD
		C3018W 3000-1800K				010 1m (3.3ft)				
						030 3m (9.8ft)				
						050 5m (16.4ft)				
						100 10m (32.8ft)				
63S1515H	2		12R							MAGSDM96-WD

FLEX 15x15 HORIZONTAL BLACK

0.6X0.6"

ACCESSORIES

STATIC WHITE

TYPE Aluminum profile
MOUNTING Surface mount


FREE CUT

ORDERING INFORMATION

MODEL	FINISH	LENGTH
63S1515X	5AP Silver	0030 30mm (1.18")
	2AP Black	1000 1000mm (39.37")
63S1515X		

TUNABLE WHITE

WARM DIM

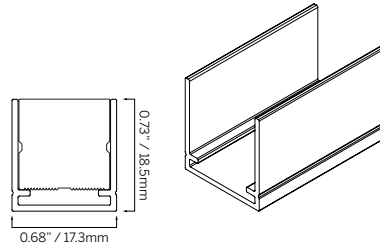

30



1000




DRIVERS

TYPE Locking profile
MOUNTING Surface mount

IES FILES

ORDERING INFORMATION

MODEL	FINISH	LENGTH
63S1515X	5LP Silver	0035 35mm (1.38")
	2LP Black	1000 1000mm (39.37")
		2000 2000mm (78.74")
		2500 2000mm (98.43")
63S1515X		

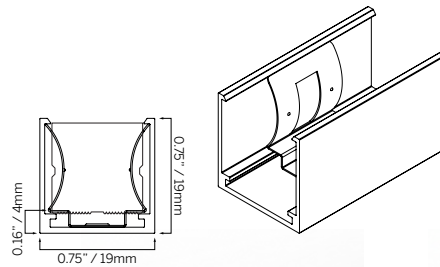

35



1000/2000/2500




ACCESSORIES

TYPE Deep Self Locking Profile
MOUNTING Surface mount

ORDERING INFORMATION

MODEL	FINISH	LENGTH
63S1515X	5LPC Silver	0035 35mm (1.38")
	2LPC Black	1000 1000mm (39.37")
63S1515X		



35



1000



FLEX 15x15 HORIZONTAL BLACK

0.6X0.6"

ACCESSORIES

STATIC WHITE

TYPE Stainless Mounting Clip
MOUNTING Surface mount



FREE CUT

ORDERING INFORMATION

MODEL	FINISH	LENGTH
63S1515H	5SC Silver	0020 20mm (0.79")
	2SC Black	1000 1000mm (39.37")
63S1515H		

TUNABLE WHITE

WARM DIM



DRIVERS

IES FILES

ACCESSORIES

TYPE 3D Stainless Mounting Clip
MOUNTING Surface mount

ORDERING INFORMATION

MODEL	FINISH	LENGTH
63S1515X	5SC Silver	1000 1000mm (39.37")
	2SC Black	
63S1515X		1000

