



# FLEX 15x15 MULTI HIGH TEMP

## 0.6x0.6"

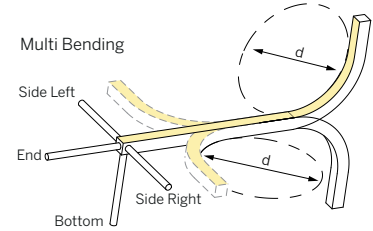

STATIC WHITE



SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

**DRIVERS** **STATIC WHITE (CRI >90 Ra)**  
 SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm) (WORKING TEMP. -25...+80°C)

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
<b>S04</b> 50 mm (2")	60	78	84	91	93	93	94

**ACCESSORIES** ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63HTS1515M</b> Flex 15x15 Multi High Temp	<b>1</b> White	<b>B18</b> 1800K	<b>S04</b> 4 W/m (5m max.) 1.2 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft)	<b>.XXXX</b> Length in inches	<b>D010</b> <b>EL96</b> <b>DPH</b> <b>L3D0E</b> <b>DALI-DT6</b> <b>UNV96-WL</b> <b>UNV384-WL</b>
		<b>B24</b> 2400K				<b>010</b> 1m (3.3ft)		
		<b>B27</b> 2700K				<b>030</b> 3m (9.8ft)		
		<b>B30</b> 3000K				<b>050</b> 5m (16.4ft)		
		<b>B35</b> 3500K				<b>100</b> 10m (32.8ft)		
		<b>B40</b> 4000K						
<b>B60</b> 6000K								
<b>63HTS1515M</b>	<b>1</b>		<b>S04</b>					


# FLEX 15x15 MULTI HIGH TEMP

## 0.6x0.6"

**STATIC WHITE** **ACCESSORIES**

**TYPE** Aluminum profile  
**MOUNTING** Surface mount


ORDERING INFORMATION		
MODEL	FINISH	LENGTH
<b>63S1515X</b>	<b>5AP</b> Silver	<b>0030</b> 30mm (1.18")
	<b>2AP</b> Black	<b>1000</b> 1000mm (39.37")
		<b>2000</b> 2000mm (78.74")
		<b>2500</b> 2000mm (98.43")
<b>63S1515X</b>		

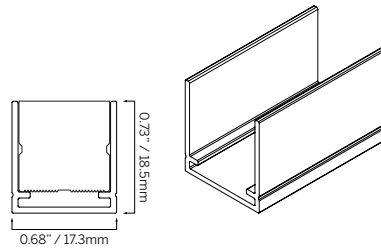

30




1000/2000/2500

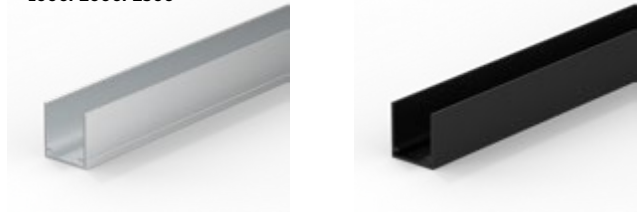

**DRIVERS**

**TYPE** Locking profile  
**MOUNTING** Surface mount


ORDERING INFORMATION		
MODEL	FINISH	LENGTH
<b>63S1515X</b>	<b>5LP</b> Silver	<b>0035</b> 35mm (1.38")
	<b>2LP</b> Black	<b>1000</b> 1000mm (39.37")
		<b>2000</b> 2000mm (78.74")
		<b>2500</b> 2000mm (98.43")
<b>63S1515X</b>		

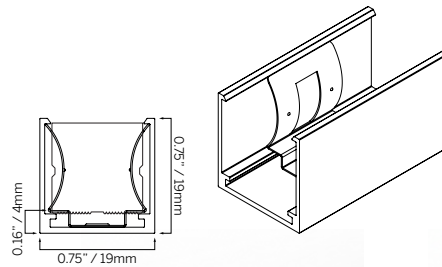

35




1000/2000/2500

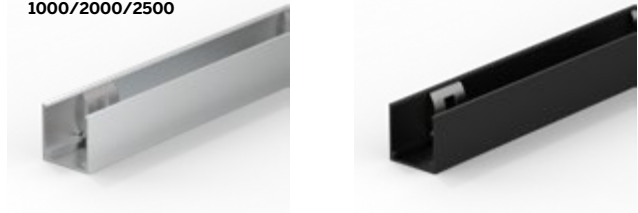

**ACCESSORIES**

**TYPE** Deep Self Locking Profile  
**MOUNTING** Surface mount

ORDERING INFORMATION		
MODEL	FINISH	LENGTH
<b>63S1515X</b>	<b>5LPC</b> Silver	<b>0035</b> 35mm (1.38")
	<b>2LPC</b> Black	<b>1000</b> 1000mm (39.37")
<b>63S1515X</b>		

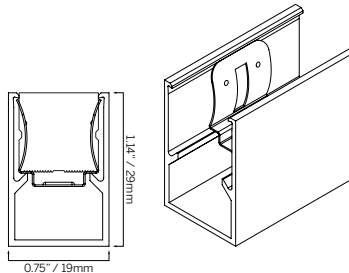

35



1000



# FLEX 15x15 MULTI HIGH TEMP



## 0.6x0.6"

### ACCESSORIES

STATIC  
WHITE

**TYPE** Stainless Mounting Clip  
**MOUNTING** Surface mount

ORDERING INFORMATION		
MODEL	FINISH	LENGTH
<b>63S1515H</b>	<b>5SC</b> Silver	<b>0020</b> 20mm (0.79")
	<b>2SC</b> Black	<b>1000</b> 1000mm (39.37")
<b>63S1515H</b>		



DRIVERS

IES  
FILES

ACCESSORIES

**TYPE** Stainless Bendable Profile  
**MOUNTING** Surface mount

ORDERING INFORMATION		
MODEL	FINISH	LENGTH
<b>63S1515X</b>	<b>5SC</b> Silver	<b>1000</b> 1000mm (39.37")
	<b>2SC</b> Black	
<b>63S1515X</b>		

