
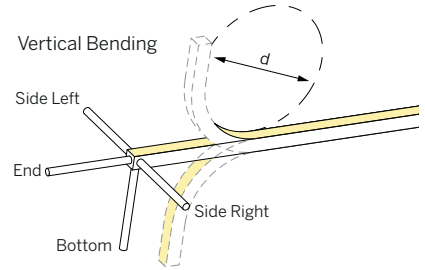



FLEX 15x15 VERTICAL

0.6x0.6"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB/RGBW
- PIXEL

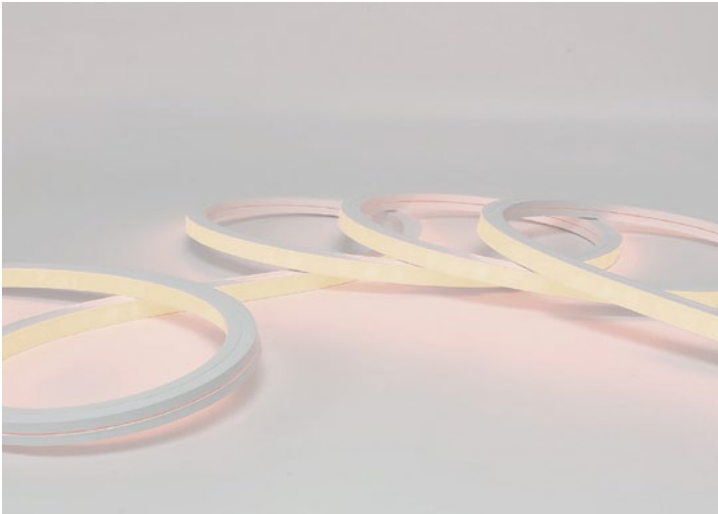

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

STATIC WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 250 mm)

DRIVER OPTIONS (See driver page for details)	
DO10 = eidoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eidoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eidoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
S05 50 mm (2")	47	62	67	72	74	76	75
S12 50 mm (2")	109	136	155	167	170	176	173

ORDERING INFORMATION								
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1515V Flex 15x15 Vertical	1 White	C18 1800K	S05 5 W/m (15m max.)	E End	7 IP67	003 0.3m (1ft)	.XXXX Length in inches	DO10
		C24 2400K	1.5 W/ft (49.2ft max.)	B Bottom	2 IP20	010 1m (3.3ft)		EL96
		C27 2700K	S12 12 W/m (6m max.)	SL Side Left		030 3m (9.8ft)		DPH
		C30 3000K	3.7 W/ft (19.7ft max.)	SR Side Right		050 5m (16.4ft)		L3D0E
		C35 3500K				100 10m (32.8ft)		DALI-DT6
		C40 4000K						UNV96-WL
C60 6000K						UNV384-WL		
63S1515V	1							

STATIC WHITE - HIGH OUTPUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 250 mm)

DRIVER OPTIONS (See driver page for details)	
DO10 = eidoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eidoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eidoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V




Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
S13 62.5 mm (2.5")	187	244	265	288	293	293	298

ORDERING INFORMATION								
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1515HOV Flex 15x15 Vertical High Output	1 White	C18 1800K	S13 13.5 W/m (5m max.)	E End	7 IP67	003 0.3m (1ft)	.XXXX Length in inches	DO10
		C24 2400K	4.1 W/ft (16.4ft max.)	B Bottom	2 IP20	010 1m (3.3ft)		EL96
		C27 2700K		SL Side Left		030 3m (9.8ft)		DPH
		C30 3000K		SR Side Right		050 5m (16.4ft)		L3D0E
		C35 3500K				100 10m (32.8ft)		DALI-DT6
		C40 4000K						UNV96-WL
C60 6000K						UNV384-WL		
63S1515HOV	1		S13					

FLEX 15x15 VERTICAL

0.6x0.6"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB/RGBW
- PIXEL

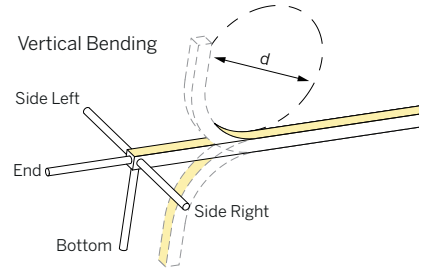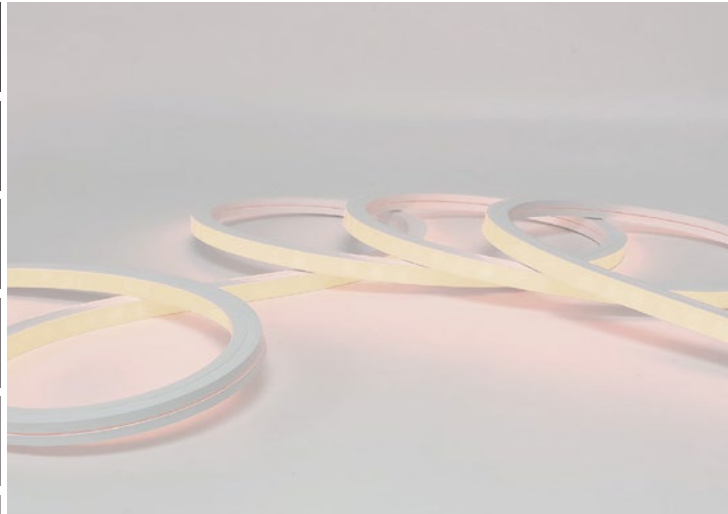

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

STATIC WHITE FREE CUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 250 mm)

- DRIVERS
- IES FILES

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft							
	1800K	2400K	2700K	3000K	3500K	4000K	6000K	
SF05	Free Cut	41	54	62	63	64	69	65
SF12	Free Cut	94	123	144	145	148	160	150




- ACCESSORIES

ORDERING INFORMATION								
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1515V Flex 15x15 Vertical	1 White	C18 1800K	SF05 5 W/m (12.5m max.) 1.5 W/ft (41ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft)	.XXXX Length in inches	D010 EL96 DPH L3D0E DALI-DT6 UNV96-WL UNV384-WL
		C24 2400K				010 1m (3.3ft)		
		C27 2700K	030 3m (9.8ft)					
		C30 3000K	050 5m (16.4ft)					
		C35 3500K	100 10m (32.8ft)					
		C40 4000K						
C60 6000K								
63S1515V	1							

FLEX 15x15 VERTICAL

0.6x0.6"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB/RGBW
- PIXEL

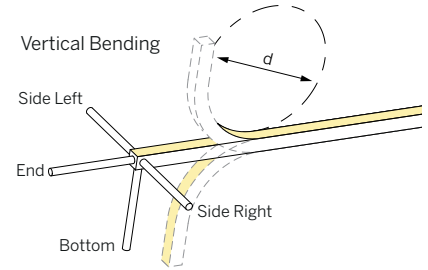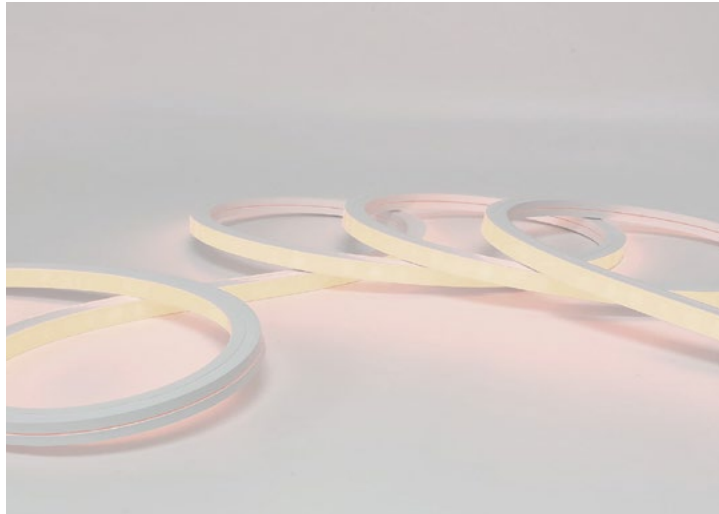

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

TUNABLE WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 250 mm)

DRIVER OPTIONS (See driver page for details)

DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
DALI-DT8 = eldoLED DALI (DT8), 0.1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
CT10 62.5 mm (2.5")	81	113	124	130	132	133	138

DRIVERS IES FILES

ORDERING INFORMATION										
MODEL	JACKET	CCT (LOW)	CCT (HIGH)	LED TYPE*	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
63S1515V Flex 15x15 Vertical	1 White	C18 1800K	24 2400K	CT10 2x9.6 W/m (7m max.) 2x2.9 W/ft (23ft max.) <small>* Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.</small>	E End	7 IP67 2 IP20	003 0.3m (1ft)	.XXXX Length in inches	DALI-DT6 DALI-DT8	
		C24 2400K	27 2700K		B Bottom		010 1m (3.3ft)			
		C27 2700K	30 3000K		SL Side Left		030 3m (9.8ft)			
		C30 3000K	35 3500K		SR Side Right		050 5m (16.4ft)			
		C35 3500K	40 4000K				100 10m (32.8ft)			
		C40 4000K	60 6000K							
63S1515V	1			CT10						

TUNABLE WHITE - HIGH OUTPUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 250 mm)

DRIVER OPTIONS (See driver page for details)

DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
DALI-DT8 = eldoLED DALI (DT8), 0.1% dimming, 120-277V




Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
CT10 83.3 mm (3.3")	129	180	199	208	210	212	221
CT13 83.3 mm (3.3")	168	234	257	271	273	276	287

ORDERING INFORMATION										
MODEL	JACKET	CCT (LOW)	CCT (HIGH)	LED TYPE*	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
63S1515HOV Flex 15x15 Vertical High Output	1 White	C18 1800K	24 2400K	CT10 2x10 W/m (4m max.) 2x3 W/ft (13.1ft max.) CT13 2x13 W/m (3m max.) 2x4 W/ft (9.8ft max.) <small>* Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.</small>	E End	7 IP67 2 IP20	003 0.3m (1ft)	.XXXX Length in inches	DALI-DT6 DALI-DT8	
		C24 2400K	27 2700K		B Bottom		010 1m (3.3ft)			
		C27 2700K	30 3000K		SL Side Left		030 3m (9.8ft)			
		C30 3000K	35 3500K		SR Side Right		050 5m (16.4ft)			
		C35 3500K	40 4000K				100 10m (32.8ft)			
		C40 4000K	60 6000K							
63S1515HOV	1									

FLEX 15x15 VERTICAL

0.6x0.6"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB/RGBW
- PIXEL

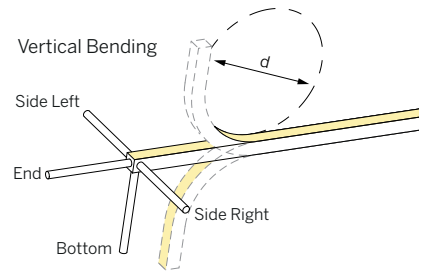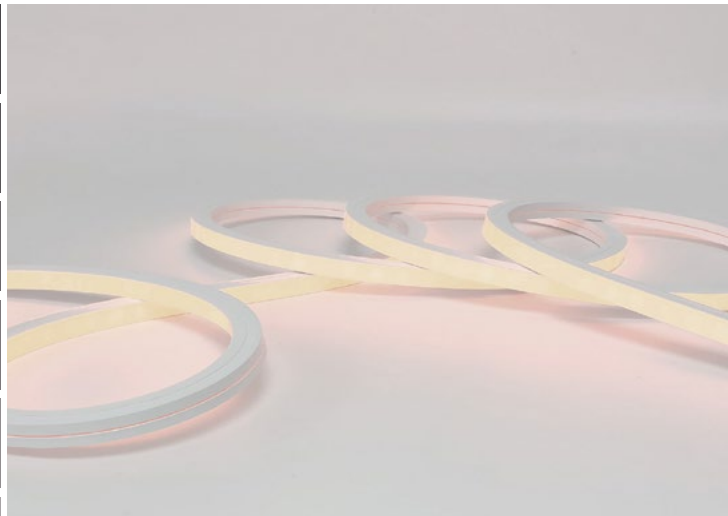

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

WARM DIM (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 250 mm)

DRIVER OPTIONS (See driver page for details)
MAGSDM96-WD = 0-10V / Phase Dim 96W, 0.1% CCR Dimming for Warm Dim, 120-277V (Phase - 120V only)

	DELIVERED LUMENS lm/ft		
	Cut Interval	2700K	3000K
14R	83.33 mm (2")	132	144




- DRIVERS
- IES FILES

ORDERING INFORMATION										
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH			DRIVERS
63S1515V Flex 15x15 Vertical	1 White	C2718W 2700-1800K C3018W 3000-1800K	14R 14 W/m (5m max.) 4.3 W/ft (16.4ft max.)	E End	7 IP67	003 0.3m (1ft)	.XXXX Length in inches			MAGSDM96-WD
				B Bottom	2 IP20	010 1m (3.3ft)				
				SL Side Left		030 3m (9.8ft)				
				SR Side Right		050 5m (16.4ft)				
						100 10m (32.8ft)				
63S1515V	1		14R						MAGSDM96-WD	

FLEX 15x15 VERTICAL

0.6x0.6"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB / RGBW
- PIXEL

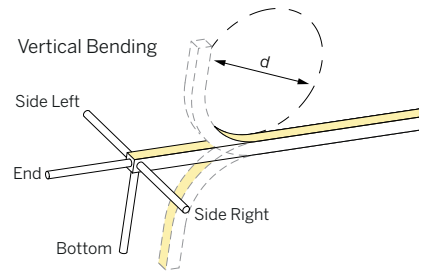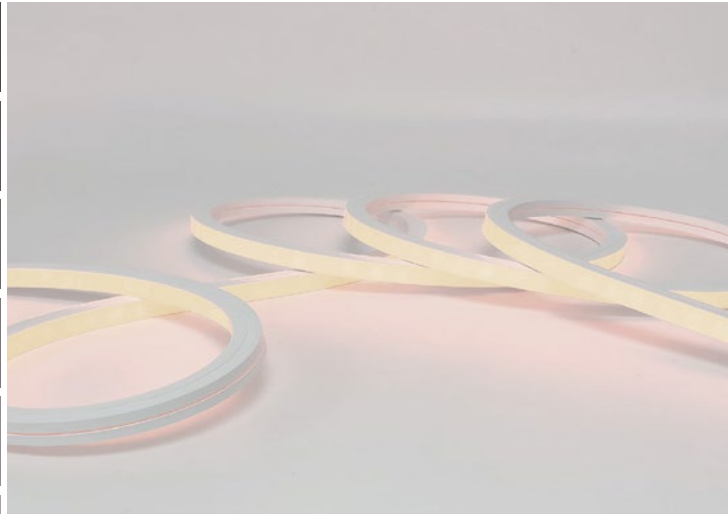

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

RGB

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)
DMX = eldoLED, 24V, 0.1% DMX Dimming

	DELIVERED LUMENS lm/ft			
	Cut Interval	RED	GREEN	BLUE
L12	100 mm (3.9")	26	67	15

ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
63S1515V Flex 15x15 Vertical	1 White	RGB RGB	L12 12 W/m (5m max.) 3.7 W/ft (16.4ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	DMX	
63S1515V	1	RGB	L12					DMX	

RGBW

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)
DMX = eldoLED, 24V, 0.1% DMX Dimming




	DELIVERED LUMENS lm/ft						
	Cut Interval	RED	GREEN	BLUE	2700K	3000K	4000K
L16	100 mm (3.9")	26	67	15	58	63	66

ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
63S1515V Flex 15x15 Vertical	1 White	RGBW27 RGBW(2700K) RGBW30 RGBW(3000K) RGBW40 RGBW(4000K)	L16 16 W/m (5m max.) 4.9 W/ft (16.4ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	DMX	
63S1515V	1		L16					DMX	

FLEX 15x15 VERTICAL

0.6x0.6"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB/RGBW
- PIXEL

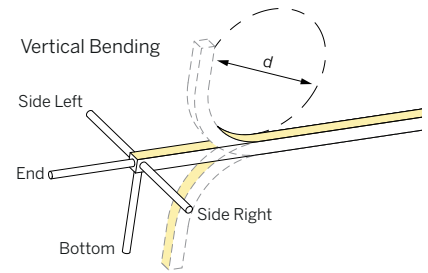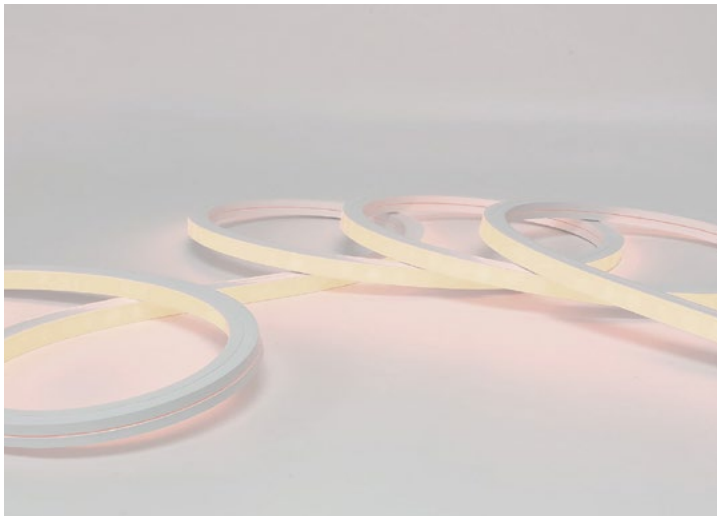

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

PIXEL - STATIC WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)
DMX = eldoLED, 24V, 0.1% DMX Dimming

	Pixels	DMX Addresses	Cut Interval	DELIVERED LUMENS lm/ft							
				1800K	2400K	2700K	3000K	3500K	4000K	6000K	
DMX10P13	10 /m (3.94")	10 /m (1 /px)	100 mm (3.9")	109	142	154	167	170	174	173	

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1515V Flex 15x15 Vertical	1 White	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K C60 6000K	DMX10P13 13.5 W/m (5m max.) 4.1 W/ft (16.4ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	DMX
63S1515V	1		DMX10P13					DMX

PIXEL - TUNABLE WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)
DMX = eldoLED, 24V, 0.1% DMX Dimming

	Pixels	DMX Addresses	Cut Interval	DELIVERED LUMENS lm/ft							
				1800K	2400K	2700K	3000K	3500K	4000K	6000K	
CTDMX10P13	10 /m (3.94")	20 /m (2 /px)	100 mm (3.9")	51	71	78	82	82	83	87	

ORDERING INFORMATION




MODEL	JACKET	CCT ¹	CCT ²	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1515V Flex 15x15 Vertical	1 White	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K	24 2400K 27 2700K 30 3000K 35 3500K 40 4000K 60 6000K	CTDMX10P13 13.5 W/m (5m max.) 4.1 W/ft (16.4ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	DMX
63S1515V	1			CTDMX10P13					DMX

¹ Left CCT is the LOW end and the right CCT is the HIGH end.

FLEX 15x15 VERTICAL

0.6x0.6"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB / RGBW
- PIXEL

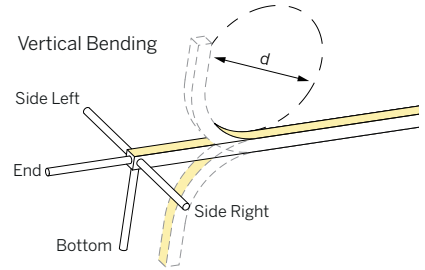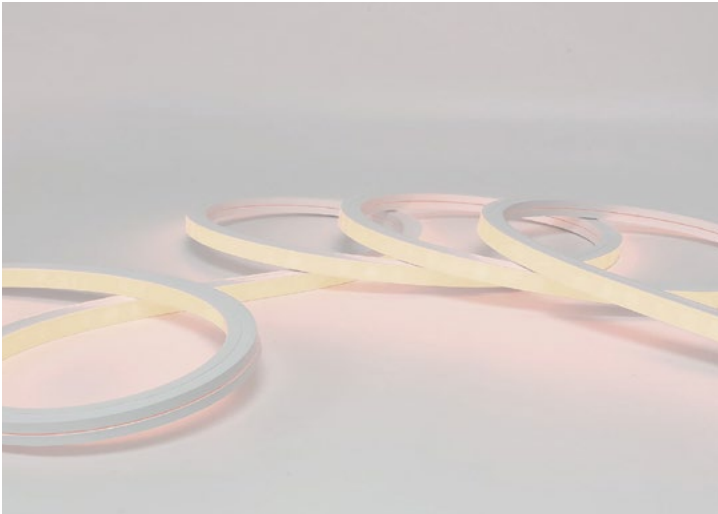

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

PIXEL - RGB

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)
DMX = eldoLED, 24V, 0.1% DMX Dimming

	Pixels	DMX Addresses	Cut Interval	DELIVERED LUMENS lm/ft		
				RED	GREEN	BLUE
DMX02P14	2 /m (19.7")	6 /m (3 /px)	500 mm (19.7")	15	41	10
DMX10P14	10 /m (3.94")	30 /m (3 /px)	100 mm (3.9")	15	41	10

ORDERING INFORMATION								
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1515V Flex 15x15 Vertical	1 White	RGB RGB	DMX02P14 14 W/m (5m max.) 4.3 W/ft (16.4ft max.) DMX10P14 14 W/m (5m max.) 4.3 W/ft (16.4ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	DMX
63S1515V	1	RGB						DMX

PIXEL - RGBW

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)
DMX = eldoLED, 24V, 0.1% DMX Dimming

	Pixels	DMX Addresses	Cut Interval	DELIVERED LUMENS lm/ft					
				RED	GREEN	BLUE	2700K	3000K	4000K
DMX10P16	10 /m (3.94")	40 /m (4 /px)	100 mm (3.9")	11	29	7	26	28	29

ORDERING INFORMATION								
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S1515V Flex 15x15 Vertical	1 White	RGBW27 RGBW(2700K) RGBW30 RGBW(3000K) RGBW40 RGBW(4000K)	DMX10P16 16 W/m (5m max.) 4.9 W/ft (16.4ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	DMX
63S1515V	1		DMX10P16					DMX

FLEX 15x15 VERTICAL

0.6x0.6"

ACCESSORIES

STATIC
WHITE

TYPE Aluminum profile
MOUNTING Surface mount

FREE
CUT

ORDERING INFORMATION


MODEL	FINISH	LENGTH
63S1515X	5AP Silver	0030 30mm (1.18")
	2AP Black	1000 1000mm (39.37")
63S1515X		

TUNABLE
WHITE

WARM
DIM

RGB/
RGBW

PIXEL

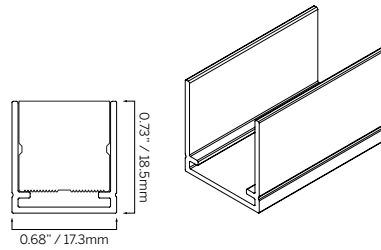

30



1000




DRIVERS

TYPE Locking profile
MOUNTING Surface mount

IES
FILES

ORDERING INFORMATION

MODEL	FINISH	LENGTH
63S1515X	5LP Silver	0035 35mm (1.38")
	2LP Black	1000 1000mm (39.37")
		2000 2000mm (78.74")
		2500 2000mm (98.43")
63S1515X		

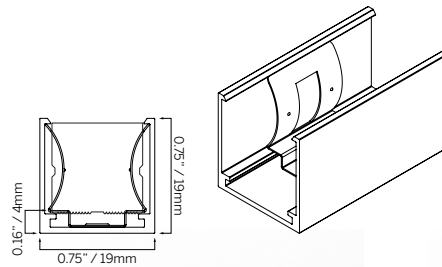

35




1000/2000/2500



TYPE Deep Self Locking Profile
MOUNTING Surface mount

ORDERING INFORMATION

MODEL	FINISH	LENGTH
63S1515X	5LPC Silver	0035 35mm (1.38")
	2LPC Black	1000 1000mm (39.37")
63S1515X		



35



1000



FLEX 15x15 VERTICAL

0.6x0.6"

ACCESSORIES

STATIC
WHITE

TYPE Stainless Mounting Clip
MOUNTING Surface mount

FREE
CUT

ORDERING INFORMATION


MODEL	FINISH	LENGTH
63S1515V	5SC Silver 2SC Black	0020 20mm (0.79") 1000 1000mm (39.37")
63S1515V		

TUNABLE
WHITE

WARM
DIM

RGB/
RGBW

PIXEL

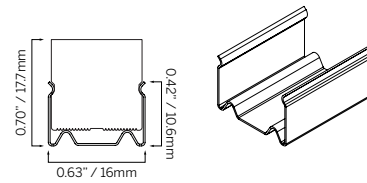

DRIVERS

IES
FILES

ACCESSORIES

TYPE Stainless Bendable Profile
MOUNTING Surface mount

ORDERING INFORMATION

MODEL	FINISH	LENGTH
63S1515X	5SC Silver 2SC Black	1000 1000mm (39.37")
63S1515X		

