



# FLEX 16x17 HORIZONTAL

## 0.63x0.67"



### Horizontal Bending

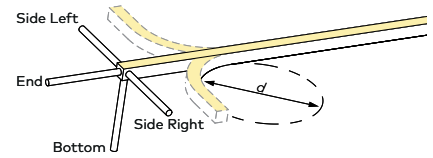

### SPECIFICATION

<b>MATERIAL</b>	Silicone
<b>MOUNTING</b>	Surface
<b>IP RATING</b>	IP67, IP20
<b>BINNING</b>	3 Step
<b>LIFETIME (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data
<b>DRIVER REQUIREMENT</b>	24VDC Constant voltage
<b>PROTECTION</b>	UV, flame, salt and chlorine resistant
<b>WARRANTY</b>	5 Years

### STATIC WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 250 mm)

#### DRIVER OPTIONS (See driver page for details)

D010 = eidoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eidoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eidoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
<b>S05</b> 50 mm (2")	51	67	73	79	80	83	82
<b>S12</b> 50 mm (2")	118	155	169	182	186	191	188

#### ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S1617H</b> Flex 16x17 Horizontal	1 White	<b>C18</b> 1800K	<b>S05</b> 5 W/m (15m max.)	<b>E</b> End	<b>7</b> IP67	<b>003</b> 0.3m (1ft)	.XXXX Length in inches	<b>D010</b>
		<b>C24</b> 2400K	1.5 W/ft (49.2ft max.)	<b>B</b> Bottom	<b>2</b> IP20	<b>010</b> 1m (3.3ft)		<b>EL96</b>
		<b>C27</b> 2700K	<b>S12</b> 12 W/m (6m max.)	<b>SL</b> Side Left		<b>030</b> 3m (9.8ft)		<b>DPH</b>
		<b>C30</b> 3000K	3.7 W/ft (19.7ft max.)	<b>SR</b> Side Right		<b>050</b> 5m (16.4ft)		<b>L3D0E</b>
		<b>C35</b> 3500K				<b>100</b> 10m (32.8ft)		<b>DALI-DT6</b>
		<b>C40</b> 4000K						<b>UNV96-WL</b>
<b>C60</b> 6000K						<b>UNV384-WL</b>		
<b>63S1617H</b>	<b>1</b>							

### STATIC WHITE - HIGH OUTPUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 250 mm)

#### DRIVER OPTIONS (See driver page for details)

D010 = eidoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eidoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eidoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V


Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
<b>S13</b> 50 mm (2")	204	267	289	314	320	321	325

#### ORDERING INFORMATION


MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S1617HOH</b> Flex 16x17 Horizontal High Output	1 White	<b>C18</b> 1800K	<b>S13</b> 13.5 W/m (5m max.)	<b>E</b> End	<b>7</b> IP67	<b>003</b> 0.3m (1ft)	.XXXX Length in inches	<b>D010</b>
		<b>C24</b> 2400K	4.1 W/ft (16.4ft max.)	<b>B</b> Bottom	<b>2</b> IP20	<b>010</b> 1m (3.3ft)		<b>EL96</b>
		<b>C27</b> 2700K		<b>SL</b> Side Left		<b>030</b> 3m (9.8ft)		<b>DPH</b>
		<b>C30</b> 3000K		<b>SR</b> Side Right		<b>050</b> 5m (16.4ft)		<b>L3D0E</b>
		<b>C35</b> 3500K				<b>100</b> 10m (32.8ft)		<b>DALI-DT6</b>
		<b>C40</b> 4000K						<b>UNV96-WL</b>
<b>C60</b> 6000K						<b>UNV384-WL</b>		
<b>63S1617HOH</b>	<b>1</b>		<b>S13</b>					

# FLEX 16x17 HORIZONTAL

## 0.63x0.67"



### Horizontal Bending

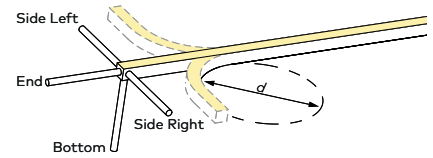

### SPECIFICATION

<b>MATERIAL</b>	Silicone
<b>MOUNTING</b>	Surface
<b>IP RATING</b>	IP67, IP20
<b>BINNING</b>	3 Step
<b>LIFETIME (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data
<b>DRIVER REQUIREMENT</b>	24VDC Constant voltage
<b>PROTECTION</b>	UV, flame, salt and chlorine resistant
<b>WARRANTY</b>	5 Years

### STATIC WHITE FREE CUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 250 mm)

#### DRIVER OPTIONS (See driver page for details)

D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V


Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
SF05 Free Cut	44	59	68	68	70	76	71
SF12 Free Cut	102	134	156	158	161	174	163

#### ORDERING INFORMATION


MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S1617H</b> Flex 16x17 Horizontal	<b>1</b> White	<b>C18</b> 1800K	<b>SF05</b> 5 W/m (12.5m max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft)	.XXXX Length in inches	<b>D010</b> <b>EL96</b> <b>DPH</b> <b>L3D0E</b> <b>DALI-DT6</b> <b>UNV96-WL</b> <b>UNV384-WL</b>
		<b>C24</b> 2400K	1.5 W/ft (41ft max.)			<b>010</b> 1m (3.3ft)		
		<b>C27</b> 2700K	<b>SF12</b> 12 W/m (6m max.)			<b>030</b> 3m (9.8ft)		
		<b>C30</b> 3000K	3.7 W/ft (19.7ft max.)			<b>050</b> 5m (16.4ft)		
		<b>C35</b> 3500K				<b>100</b> 10m (32.8ft)		
		<b>C40</b> 4000K						
<b>C60</b> 6000K								
<b>63S1617H</b>	<b>1</b>							

# FLEX 16x17 HORIZONTAL

## 0.63x0.67"



### Horizontal Bending

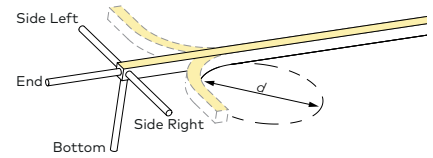

### SPECIFICATION

<b>MATERIAL</b>	Silicone
<b>MOUNTING</b>	Surface
<b>IP RATING</b>	IP67, IP20
<b>BINNING</b>	3 Step
<b>LIFETIME (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data
<b>DRIVER REQUIREMENT</b>	24VDC Constant voltage
<b>PROTECTION</b>	UV, flame, salt and chlorine resistant
<b>WARRANTY</b>	5 Years

### TUNABLE WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 250 mm)

#### DRIVER OPTIONS (See driver page for details)

DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
DALI-DT8 = eldoLED DALI (DT8), 0.1% dimming, 120-277V

	Cut Interval	DELIVERED LUMENS lm/ft						
		1800K	2400K	2700K	3000K	3500K	4000K	6000K
<b>CT10</b>	62.5 mm (2.5")	88	123	135	143	144	145	151

### ORDERING INFORMATION

MODEL	JACKET	CCT (LOW)	CCT (HIGH)	LED TYPE*	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S1617H</b> Flex 16x17 Horizontal	<b>1</b> White	<b>C18</b> 1800K	<b>24</b> 2400K	<b>CT10</b> 2x9.6 W/m (7m max.) 2x2.9 W/ft (23ft max.)  * Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft)	<b>.XXXX</b> Length in inches	<b>DALI-DT6</b> <b>DALI-DT8</b>
		<b>C24</b> 2400K	<b>27</b> 2700K				<b>010</b> 1m (3.3ft)		
		<b>C27</b> 2700K	<b>30</b> 3000K				<b>030</b> 3m (9.8ft)		
		<b>C30</b> 3000K	<b>35</b> 3500K				<b>050</b> 5m (16.4ft)		
		<b>C35</b> 3500K	<b>40</b> 4000K				<b>100</b> 10m (32.8ft)		
		<b>C40</b> 4000K	<b>60</b> 6000K						
<b>63S1617H</b>	<b>1</b>			<b>CT10</b>					

### TUNABLE WHITE - HIGH OUTPUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 250 mm)

#### DRIVER OPTIONS (See driver page for details)

DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
DALI-DT8 = eldoLED DALI (DT8), 0.1% dimming, 120-277V


	Cut Interval	DELIVERED LUMENS lm/ft						
		1800K	2400K	2700K	3000K	3500K	4000K	6000K
<b>CT10</b>	83.3mm (3.3")	141	197	216	227	229	232	241
<b>CT13</b>	83.3mm (3.3")	183	256	282	296	298	301	313

### ORDERING INFORMATION


MODEL	JACKET	CCT (LOW)	CCT (HIGH)	LED TYPE*	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S1617HOH</b> Flex 16x17 Horizontal High Output	<b>1</b> White	<b>C18</b> 1800K	<b>24</b> 2400K	<b>CT10</b> 2x10 W/m (4m max.) 2x3 W/ft (13.1ft max.)  <b>CT13</b> 2x13 W/m (3m max.) 2x4 W/ft (9.8ft max.)  * Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft)	<b>.XXXX</b> Length in inches	<b>DALI-DT6</b> <b>DALI-DT8</b>
		<b>C24</b> 2400K	<b>27</b> 2700K				<b>010</b> 1m (3.3ft)		
		<b>C27</b> 2700K	<b>30</b> 3000K				<b>030</b> 3m (9.8ft)		
		<b>C30</b> 3000K	<b>35</b> 3500K				<b>050</b> 5m (16.4ft)		
		<b>C35</b> 3500K	<b>40</b> 4000K				<b>100</b> 10m (32.8ft)		
		<b>C40</b> 4000K	<b>60</b> 6000K						
<b>63S1617HOH</b>	<b>1</b>								

# FLEX 16x17 HORIZONTAL

0.63x0.67"



### Horizontal Bending

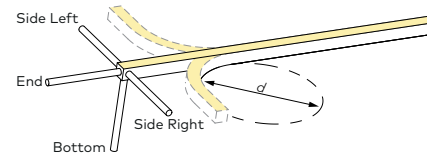

### SPECIFICATION

<b>MATERIAL</b>	Silicone
<b>MOUNTING</b>	Surface
<b>IP RATING</b>	IP67, IP20
<b>BINNING</b>	3 Step
<b>LIFETIME (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data
<b>DRIVER REQUIREMENT</b>	24VDC Constant voltage
<b>PROTECTION</b>	UV, flame, salt and chlorine resistant
<b>WARRANTY</b>	5 Years

### WARM DIM (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 250 mm)

#### DRIVER OPTIONS (See driver page for details)

MAGSDM96-WD = 0-10V / Phase Dim 96W, 0.1% CCR Dimming for Warm Dim, 120-277V (Phase - 120V only)



	Cut Interval	DELIVERED LUMENS lm/ft	
		2700K	3000K
<b>14R</b>	83.33 mm (3.3")	143	155

### ORDERING INFORMATION


MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S1617H</b> Flex 16x17 Horizontal	<b>1</b> White	<b>C2718W</b> 2700-1800K <b>C3018W</b> 3000-1800K	<b>14R</b> 14 W/m (5m max.) 4.3 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft) <b>010</b> 1m (3.3ft) <b>030</b> 3m (9.8ft) <b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)	<b>.XXXX</b> Length in inches	MAGSDM96-WD
<b>63S1617H</b>	<b>1</b>		<b>14R</b>					<b>MAGSDM96-WD</b>

# FLEX 16x17 HORIZONTAL

## 0.63x0.67"

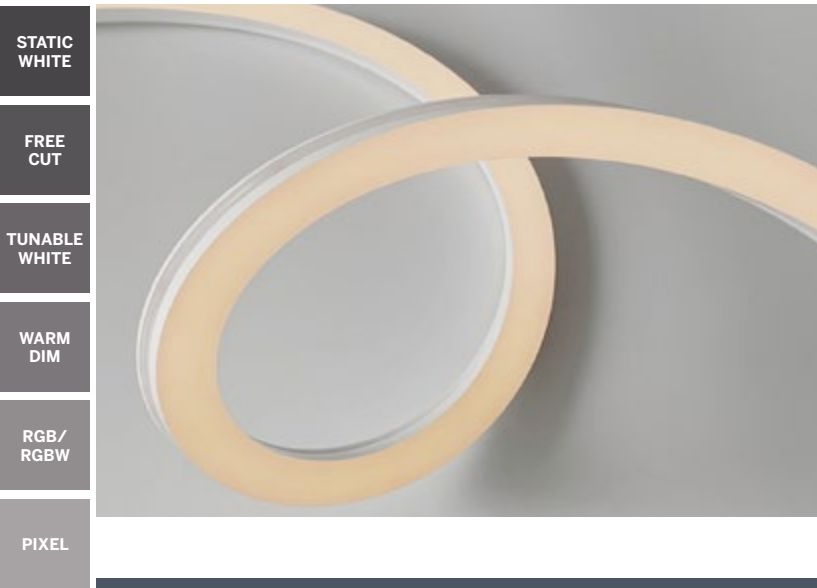

### Horizontal Bending

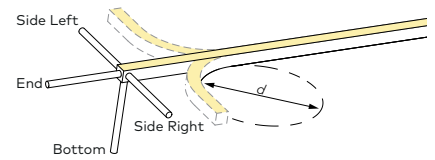

### SPECIFICATION

<b>MATERIAL</b>	Silicone
<b>MOUNTING</b>	Surface
<b>IP RATING</b>	IP67, IP20
<b>BINNING</b>	3 Step
<b>LIFETIME (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data
<b>DRIVER REQUIREMENT</b>	24VDC Constant voltage
<b>PROTECTION</b>	UV, flame, salt and chlorine resistant
<b>WARRANTY</b>	5 Years

### RGB

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

#### DRIVER OPTIONS (See driver page for details)

DMX = eldoLED, 24V, 0.1% DMX Dimming

	Cut Interval	DELIVERED LUMENS lm/ft		
		RED	GREEN	BLUE
<b>L12</b>	100 mm (3.9")	24	65	15

### ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S1617H</b> Flex 16x17 Horizontal	<b>1</b> White	<b>RGB</b> RGB	<b>L12</b> 12 W/m (6m max.) 3.7 W/ft (19.7ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft) <b>010</b> 1m (3.3ft) <b>030</b> 3m (9.8ft) <b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)	<b>.XXXX</b> Length in inches	<b>DMX</b>
<b>63S1617H</b>	<b>1</b>	<b>RGB</b>	<b>L12</b>					<b>DMX</b>

### RGBW

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

#### DRIVER OPTIONS (See driver page for details)

DMX = eldoLED, 24V, 0.1% DMX Dimming


	Cut Interval	DELIVERED LUMENS lm/ft					
		RED	GREEN	BLUE	2700K	3000K	4000K
<b>L16</b>	100 mm (3.9")	24	65	15	56	61	63

### ORDERING INFORMATION


MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S1617H</b> Flex 16x17 Horizontal	<b>1</b> White	<b>RGBW27</b> RGBW(2700K) <b>RGBW30</b> RGBW(3000K) <b>RGBW40</b> RGBW(4000K)	<b>L16</b> 16 W/m (5m max.) 4.9 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft) <b>010</b> 1m (3.3ft) <b>030</b> 3m (9.8ft) <b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)	<b>.XXXX</b> Length in inches	<b>DMX</b>
<b>63S1617H</b>	<b>1</b>		<b>L16</b>					<b>DMX</b>

# FLEX 16x17 HORIZONTAL

## 0.63x0.67"



### Horizontal Bending

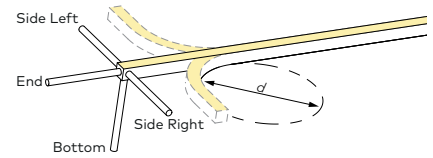

### SPECIFICATION

<b>MATERIAL</b>	Silicone
<b>MOUNTING</b>	Surface
<b>IP RATING</b>	IP67, IP20
<b>BINNING</b>	3 Step
<b>LIFETIME (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data
<b>DRIVER REQUIREMENT</b>	24VDC Constant voltage
<b>PROTECTION</b>	UV, flame, salt and chlorine resistant
<b>WARRANTY</b>	5 Years

### PIXEL - STATIC WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

#### DRIVER OPTIONS (See driver page for details)

DMX = eldoLED, 24V, 0.1% DMX Dimming

	Pixels	DMX Addresses	Cut Interval	DELIVERED LUMENS lm/ft						
				1800K	2400K	2700K	3000K	3500K	4000K	6000K
<b>DMX10P13</b>	10 /m (3.94")	20 /m (1/px)	100 mm (3.9")	119	155	168	183	186	191	189

#### ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S1617H</b> Flex 16x17 Horizontal	<b>1</b> White	<b>C18</b> 1800K <b>C24</b> 2400K <b>C27</b> 2700K <b>C30</b> 3000K <b>C35</b> 3500K <b>C40</b> 4000K <b>C60</b> 6000K	<b>DMX10P13</b> 13.5 W/m (5m max.) 4.1 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft) <b>010</b> 1m (3.3ft) <b>030</b> 3m (9.8ft) <b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)	<b>.XXXX</b> Length in inches	<b>DMX</b>
<b>63S1617H</b>	<b>1</b>		<b>DMX10P13</b>					<b>DMX</b>

### PIXEL - TUNABLE WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

#### DRIVER OPTIONS (See driver page for details)

DMX = eldoLED, 24V, 0.1% DMX Dimming


	Pixels	DMX Addresses	Cut Interval	DELIVERED LUMENS lm/ft						
				1800K	2400K	2700K	3000K	3500K	4000K	6000K
<b>CTDMX10P13</b>	10 /m (3.94")	20 /m (2/px)	100 mm (3.9")	55	77	85	89	90	91	95

#### ORDERING INFORMATION


MODEL	JACKET	CCT	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S1617H</b> Flex 16x17 Horizontal	<b>1</b> White	<b>C18</b> 1800K <b>C24</b> 2400K <b>C27</b> 2700K <b>C30</b> 3000K <b>C35</b> 3500K <b>C40</b> 4000K	<b>24</b> 2400K <b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K <b>60</b> 6000K	<b>CTDMX10P13</b> 13.5 W/m (5m max.) 4.1 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft) <b>010</b> 1m (3.3ft) <b>030</b> 3m (9.8ft) <b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)	<b>.XXXX</b> Length in inches	<b>DMX</b>
<b>63S1617H</b>	<b>1</b>			<b>CTDMX10P13</b>					<b>DMX</b>

# FLEX 16x17 HORIZONTAL

## 0.63x0.67"



### Horizontal Bending

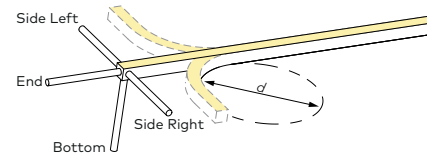

### SPECIFICATION

<b>MATERIAL</b>	Silicone
<b>MOUNTING</b>	Surface
<b>IP RATING</b>	IP67, IP20
<b>BINNING</b>	3 Step
<b>LIFETIME (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data
<b>DRIVER REQUIREMENT</b>	24VDC Constant voltage
<b>PROTECTION</b>	UV, flame, salt and chlorine resistant
<b>WARRANTY</b>	5 Years

### PIXEL - RGB

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

<b>DRIVER OPTIONS (See driver page for details)</b>
DMX = eldoLED, 24V, 0.1% DMX Dimming

	Pixels	DMX Addresses	Cut Interval	DELIVERED LUMENS lm/ft		
				RED	GREEN	BLUE
<b>DMX02P14</b>	2 /m (19.7")	6 /m (3 /px)	500 mm (19.7")	17	45	10
<b>DMX10P14</b>	10 /m (3.94")	30 /m (3 /px)	100 mm (3.9")	17	45	10

### ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S1617H</b> Flex 16x17 Horizontal	<b>1</b> White	<b>RGB</b> RGB	<b>DMX02P14</b> 14 W/m (5m max.) 4.3 W/ft (16.4ft max.) <b>DMX10P14</b> 14 W/m (5m max.) 4.3 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft) <b>010</b> 1m (3.3ft) <b>030</b> 3m (9.8ft) <b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)	<b>.XXXX</b> Length in inches	<b>DMX</b>
<b>63S1617H</b>	<b>1</b>	<b>RGB</b>						<b>DMX</b>

### PIXEL - RGBW

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

<b>DRIVER OPTIONS (See driver page for details)</b>
DMX = eldoLED, 24V, 0.1% DMX Dimming

	Pixels	DMX Addresses	Cut Interval	DELIVERED LUMENS lm/ft					
				RED	GREEN	BLUE	2700K	3000K	4000K
<b>DMX10P16</b>	10 /m (3.94")	40 /m (4 /px)	100 mm (3.9")	12	32	7	28	30	32

### ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S1617H</b> Flex 16x17 Horizontal	<b>1</b> White	<b>RGBW27</b> RGBW(2700K) <b>RGBW30</b> RGBW(3000K) <b>RGBW40</b> RGBW(4000K)	<b>DMX10P16</b> 16 W/m (5m max.) 4.9 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft) <b>010</b> 1m (3.3ft) <b>030</b> 3m (9.8ft) <b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)	<b>.XXXX</b> Length in inches	<b>DMX</b>
<b>63S1617H</b>	<b>1</b>		<b>DMX10P16</b>					<b>DMX</b>

# FLEX 16x17 HORIZONTAL


0.63x0.67"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB / RGBW
- PIXEL

## ACCESSORIES

**TYPE** Locking Profile  
**MOUNTING** Surface mount

ORDERING INFORMATION		
MODEL	FINISH	LENGTH
<b>63S1617X</b>	<b>5LP</b> Silver	<b>0035</b> 35mm (1.38") <b>1000</b> 1000mm (39.37")
<b>63S1617X</b>	<b>5LP</b>	

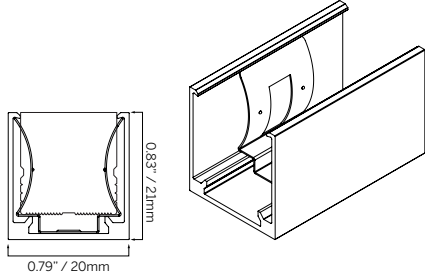

**0035**





**1000**



- DRIVERS
- IES FILES

**TYPE** Stainless Profile Bendable  
**MOUNTING** Surface mount

ORDERING INFORMATION		
MODEL	FINISH	LENGTH
<b>63S1617X</b>	<b>5SC</b> Silver	<b>1000</b> 1000mm (39.37")
<b>63S1617X</b>	<b>5SC</b>	<b>1000</b>

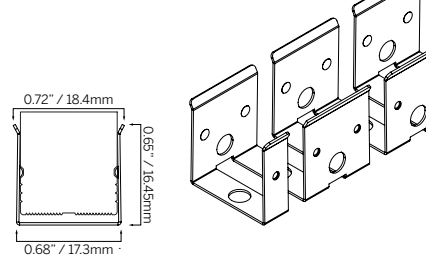

- ACCESSORIES