



# FLEX 20x18 HORIZONTAL

0.79x0.71"



### Horizontal Bending

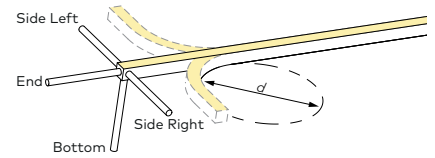

### SPECIFICATION

<b>MATERIAL</b>	Silicone
<b>MOUNTING</b>	Surface
<b>IP RATING</b>	IP67, IP20
<b>BINNING</b>	3 Step
<b>LIFETIME (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data
<b>DRIVER REQUIREMENT</b>	24VDC Constant voltage
<b>PROTECTION</b>	UV, flame, salt and chlorine resistant
<b>WARRANTY</b>	5 Years

## STATIC WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 300 mm)

### DRIVERS

#### DRIVER OPTIONS (See driver page for details)

D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft							
	1800K	2400K	2700K	3000K	3500K	4000K	6000K	
<b>S05</b> 50 mm (2")	44	57	63	67	68	71	69	
<b>S12</b> 50 mm (2")	101	132	145	156	159	163	161	

### IES FILES

#### ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S2018H</b> Flex 20x18 Horizontal	<b>1</b> White	<b>C18</b> 1800K	<b>S05</b> 5 W/m (15m max.)	<b>E</b> End	<b>7</b> IP67	<b>003</b> 0.3m (1ft)	.XXXX Length in inches	<b>D010</b>
		<b>C24</b> 2400K	<b>S12</b> 12 W/m (6m max.)	<b>B</b> Bottom	<b>2</b> IP20	<b>010</b> 1m (3.3ft)		<b>EL96</b>
		<b>C27</b> 2700K		<b>SL</b> Side Left		<b>030</b> 3m (9.8ft)		<b>DPH</b>
		<b>C30</b> 3000K		<b>SR</b> Side Right		<b>050</b> 5m (16.4ft)		<b>L3D0E</b>
		<b>C35</b> 3500K				<b>100</b> 10m (32.8ft)		<b>DALI-DT6</b>
		<b>C40</b> 4000K						<b>UNV96-WL</b>
<b>C60</b> 6000K					<b>UNV384-WL</b>			
<b>63S2018H</b>	<b>1</b>							

### ACCESSORIES

## STATIC WHITE - HIGH OUTPUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 300 mm)

### DRIVERS

#### DRIVER OPTIONS (See driver page for details)

D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V


Cut Interval	DELIVERED LUMENS lm/ft							
	1800K	2400K	2700K	3000K	3500K	4000K	6000K	
<b>S13</b> 50 mm (2")	174	228	247	268	274	274	277	

#### ORDERING INFORMATION


MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S2018HOH</b> Flex 20x18 Horizontal High Output	<b>1</b> White	<b>C18</b> 1800K	<b>S13</b> 13.5 W/m (5m max.)	<b>E</b> End	<b>7</b> IP67	<b>003</b> 0.3m (1ft)	.XXXX Length in inches	<b>D010</b>
		<b>C24</b> 2400K	<b>S13</b> 4.1 W/m (16.4ft max.)	<b>B</b> Bottom	<b>2</b> IP20	<b>010</b> 1m (3.3ft)		<b>EL96</b>
		<b>C27</b> 2700K		<b>SL</b> Side Left		<b>030</b> 3m (9.8ft)		<b>DPH</b>
		<b>C30</b> 3000K		<b>SR</b> Side Right		<b>050</b> 5m (16.4ft)		<b>L3D0E</b>
		<b>C35</b> 3500K				<b>100</b> 10m (32.8ft)		<b>DALI-DT6</b>
		<b>C40</b> 4000K						<b>UNV96-WL</b>
<b>C60</b> 6000K					<b>UNV384-WL</b>			
<b>63S2018HOH</b>	<b>1</b>		<b>S13</b>					

# FLEX 20x18 HORIZONTAL

0.79x0.71"



### Horizontal Bending

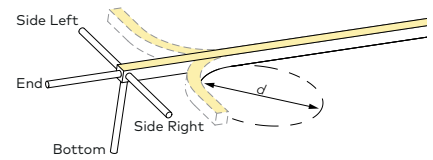

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

## STATIC WHITE FREE CUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 300 mm)

### DRIVER OPTIONS (See driver page for details)

D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V


Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
SF05 Free Cut	38	50	58	59	60	65	60
SF12 Free Cut	88	115	133	135	138	149	140

### ORDERING INFORMATION


MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S2018H</b> Flex 20x18 Horizontal	<b>1</b> White	<b>C18</b> 1800K	<b>SF05</b> 5 W/m (12.5m max.)	<b>E</b> End	<b>7</b> IP67	<b>003</b> 0.3m (1ft)	.XXXX Length in inches	<b>D010</b>
		<b>C24</b> 2400K	1.5 W/ft (41ft max.)	<b>B</b> Bottom	<b>2</b> IP20	<b>010</b> 1m (3.3ft)		<b>EL96</b>
		<b>C27</b> 2700K	<b>SF12</b> 12 W/m (6m max.)	<b>SL</b> Side Left		<b>030</b> 3m (9.8ft)		<b>DPH</b>
		<b>C30</b> 3000K	3.7 W/ft (19.7ft max.)	<b>SR</b> Side Right		<b>050</b> 5m (16.4ft)		<b>L3D0E</b>
		<b>C35</b> 3500K				<b>100</b> 10m (32.8ft)		<b>DALI-DT6</b>
		<b>C40</b> 4000K						<b>UNV96-WL</b>
<b>C60</b> 6000K					<b>UNV384-WL</b>			
<b>63S2018H</b>	<b>1</b>							

# FLEX 20x18 HORIZONTAL

0.79x0.71"



### Horizontal Bending

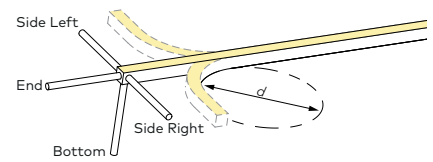

SPECIFICATION	
<b>MATERIAL</b>	Silicone
<b>MOUNTING</b>	Surface
<b>IP RATING</b>	IP67, IP20
<b>BINNING</b>	3 Step
<b>LIFETIME (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data
<b>DRIVER REQUIREMENT</b>	24VDC Constant voltage
<b>PROTECTION</b>	UV, flame, salt and chlorine resistant
<b>WARRANTY</b>	5 Years

## TUNABLE WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)	
DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V	
DALI-DT8 = eldoLED DALI (DT8), 0.1% dimming, 120-277V	

Cut Interval	DELIVERED LUMENS lm/ft							
	1800K	2400K	2700K	3000K	3500K	4000K	6000K	
<b>CT10</b> 62.5 mm (2.5")	76	105	116	122	123	124	129	

ORDERING INFORMATION									
MODEL	JACKET	CCT (LOW)	CCT (HIGH)	LED TYPE*	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S2018H</b> Flex 20x18 Horizontal	1 White	<b>C18</b> 1800K	<b>24</b> 2400K	<b>CT10</b> 2x9.6 W/m (7m max.) 2x2.9 W/ft (23ft max.)  <small>* Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.</small>	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft)	<b>.XXXX</b> Length in inches	<b>DALI-DT6</b> <b>DALI-DT8</b>
		<b>C24</b> 2400K	<b>27</b> 2700K				<b>010</b> 1m (3.3ft)		
		<b>C27</b> 2700K	<b>30</b> 3000K				<b>030</b> 3m (9.8ft)		
		<b>C30</b> 3000K	<b>35</b> 3500K				<b>050</b> 5m (16.4ft)		
		<b>C35</b> 3500K	<b>40</b> 4000K				<b>100</b> 10m (32.8ft)		
		<b>C40</b> 4000K	<b>60</b> 6000K						
<b>63S2018H</b>	<b>1</b>			<b>CT10</b>					

## TUNABLE WHITE - HIGH OUTPUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)	
DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V	
DALI-DT8 = eldoLED DALI (DT8), 0.1% dimming, 120-277V	

Cut Interval	DELIVERED LUMENS lm/ft							
	1800K	2400K	2700K	3000K	3500K	4000K	6000K	
<b>CT10</b> 83.3mm (3.3")	120	168	185	194	196	198	205	
<b>CT13</b> 83.3mm (3.3")	156	219	240	252	255	257	268	


ORDERING INFORMATION									
MODEL	JACKET	CCT (LOW)	CCT (HIGH)	LED TYPE*	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S2018HOH</b> Flex 20x18 Horizontal High Output	1 White	<b>C18</b> 1800K	<b>24</b> 2400K	<b>CT10</b> 2x10 W/m (4m max.) 2x3 W/ft (13.1ft max.) <b>CT13</b> 2x13 W/m (3m max.) 2x4 W/ft (9.8ft max.)  <small>* Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.</small>	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft)	<b>.XXXX</b> Length in inches	<b>DALI-DT6</b> <b>DALI-DT8</b>
		<b>C24</b> 2400K	<b>27</b> 2700K				<b>010</b> 1m (3.3ft)		
		<b>C27</b> 2700K	<b>30</b> 3000K				<b>030</b> 3m (9.8ft)		
		<b>C30</b> 3000K	<b>35</b> 3500K				<b>050</b> 5m (16.4ft)		
		<b>C35</b> 3500K	<b>40</b> 4000K				<b>100</b> 10m (32.8ft)		
		<b>C40</b> 4000K	<b>60</b> 6000K						
<b>63S2018HOH</b>	<b>1</b>								

# FLEX 20x18 HORIZONTAL


0.79x0.71"



- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB/RGBW
- PIXEL



### Horizontal Bending

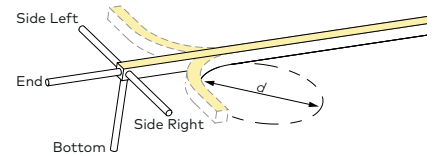

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

## WARM DIM (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)
MAGSDM96-WD = 0-10V / Phase Dim 96W, 0.1% CCR Dimming for Warm Dim, 120-277V (Phase - 120V only)


	DELIVERED LUMENS lm/ft		
	Cut Interval	2700K	3000K
14R	83.33 mm (3.3")	143	155

ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
<b>63S2018H</b> Flex 20x18 Horizontal	<b>1</b> White	<b>C2718W</b> 2700-1800K <b>C3018W</b> 3000-1800K	<b>14R</b> 14 W/m (5m max.) 4.3 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft) <b>010</b> 1m (3.3ft) <b>030</b> 3m (9.8ft) <b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)	<b>.XXXX</b> Length in inches	<b>MAGSDM96-WD</b>	
<b>63S2018H</b>	<b>1</b>		<b>14R</b>					<b>MAGSDM96-WD</b>	




# FLEX 20x18 HORIZONTAL

0.79x0.71"



### Horizontal Bending

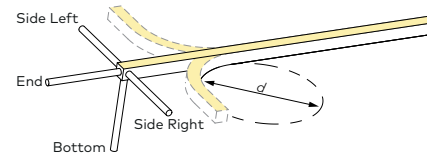

SPECIFICATION	
<b>MATERIAL</b>	Silicone
<b>MOUNTING</b>	Surface
<b>IP RATING</b>	IP67, IP20
<b>BINNING</b>	3 Step
<b>LIFETIME (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data
<b>DRIVER REQUIREMENT</b>	24VDC Constant voltage
<b>PROTECTION</b>	UV, flame, salt and chlorine resistant
<b>WARRANTY</b>	5 Years

## RGB

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

<b>DRIVER OPTIONS (See driver page for details)</b>
DMX = eldoLED, 24V, 0.1% DMX Dimming

	Cut Interval	DELIVERED LUMENS lm/ft		
		RED	GREEN	BLUE
<b>L12</b>	100 mm (3.9")	21	55	12

ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
<b>63S2018H</b> Flex 20x18 Horizontal	<b>1</b> White	<b>RGB</b> RGB	<b>L12</b> 12 W/m (5m max.) 3.7 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft) <b>010</b> 1m (3.3ft) <b>030</b> 3m (9.8ft) <b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)	<b>.XXXX</b> Length in inches	<b>DMX</b>	
<b>63S2018H</b>	<b>1</b>	<b>RGB</b>	<b>L12</b>					<b>DMX</b>	

## RGBW

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)


<b>DRIVER OPTIONS (See driver page for details)</b>
DMX = eldoLED, 24V, 0.1% DMX Dimming

	Cut Interval	DELIVERED LUMENS lm/ft			
		RED	GREEN	BLUE	4000K
<b>L16</b>	100 mm (3.9")	21	55	12	48


ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
<b>63S2018H</b> Flex 20x18 Horizontal	<b>1</b> White	<b>RGBW27</b> RGBW(2700K) <b>RGBW30</b> RGBW(3000K) <b>RGBW40</b> RGBW(4000K)	<b>L16</b> 16 W/m (5m max.) 4.9 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft) <b>010</b> 1m (3.3ft) <b>030</b> 3m (9.8ft) <b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)	<b>.XXXX</b> Length in inches	<b>DMX</b>	
<b>63S2018H</b>	<b>1</b>		<b>L16</b>					<b>DMX</b>	

# FLEX 20x18 HORIZONTAL

0.79x0.71"



### Horizontal Bending

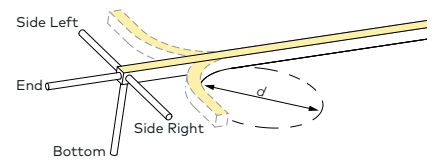

### SPECIFICATION

<b>MATERIAL</b>	Silicone
<b>MOUNTING</b>	Surface
<b>IP RATING</b>	IP67, IP20
<b>BINNING</b>	3 Step
<b>LIFETIME (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data
<b>DRIVER REQUIREMENT</b>	24VDC Constant voltage
<b>PROTECTION</b>	UV, flame, salt and chlorine resistant
<b>WARRANTY</b>	5 Years

## PIXEL - STATIC WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

### DRIVER OPTIONS (See driver page for details)

DMX = eldoLED, 24V, 0.1% DMX Dimming

	Pixels	DMX Addresses	Cut Interval	DELIVERED LUMENS lm/ft						
				1800K	2400K	2700K	3000K	3500K	4000K	6000K
<b>DMX10P13</b>	10 /m (3.94")	10 /m (1 /px)	100 mm (3.9")	119	155	168	183	186	191	189

### ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S2018H</b> Flex 20x18 Horizontal	<b>1</b> White	<b>C18</b> 1800K <b>C24</b> 2400K <b>C27</b> 2700K <b>C30</b> 3000K <b>C35</b> 3500K <b>C40</b> 4000K <b>C60</b> 6000K	<b>DMX10P13</b> 13.5 W/m (5m max.) 4.1 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft) <b>010</b> 1m (3.3ft) <b>030</b> 3m (9.8ft) <b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)	<b>.XXXX</b> Length in inches	<b>DMX</b>
<b>63S2018H</b>	<b>1</b>		<b>DMX10P13</b>					<b>DMX</b>

## PIXEL - TUNABLE WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

### DRIVER OPTIONS (See driver page for details)

DMX = eldoLED, 24V, 0.1% DMX Dimming

	Pixels	DMX Addresses	Cut Interval	DELIVERED LUMENS lm/ft						
				1800K	2400K	2700K	3000K	3500K	4000K	6000K
<b>CTDMX10P13</b>	10 /m (3.94")	20 /m (2 /px)	100 mm (3.9")	47	66	73	76	77	77	81


### ORDERING INFORMATION

MODEL	JACKET	CCT	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S2018H</b> Flex 20x18 Horizontal	<b>1</b> White	<b>C18</b> 1800K <b>C24</b> 2400K <b>C27</b> 2700K <b>C30</b> 3000K <b>C35</b> 3500K <b>C40</b> 4000K	<b>24</b> 2400K <b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K <b>60</b> 6000K	<b>CTDMX10P13</b> 13.5 W/m (5m max.) 4.1 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft) <b>010</b> 1m (3.3ft) <b>030</b> 3m (9.8ft) <b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)	<b>.XXXX</b> Length in inches	<b>DMX</b>
<b>63S2018H</b>	<b>1</b>			<b>CTDMX10P13</b>					<b>DMX</b>


# FLEX 20x18 HORIZONTAL

0.79x0.71"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB / RGBW
- PIXEL



### Horizontal Bending

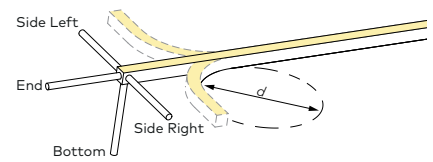

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

## PIXEL - RGB

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

<b>DRIVER OPTIONS (See driver page for details)</b>
DMX = eldoLED, 24V, 0.1% DMX Dimming

	Pixels	DMX Addresses	Cut Interval	DELIVERED LUMENS lm/ft		
				RED	GREEN	BLUE
<b>DMX02P14</b>	2 /m (19.7")	6 /m (3 /px)	500 mm (19.7")	15	38	9
<b>DMX10P14</b>	10 /m (3.94")	30 /m (3 /px)	100 mm (3.9")	15	38	9

- DRIVERS
- IES FILES
- ACCESSORIES

ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
<b>63S2018H</b> Flex 20x18 Horizontal	<b>1</b> White	<b>RGB</b> RGB	<b>DMX02P14</b> 14 W/m (5m max.) 4.3 W/ft (16.4ft max.) <b>DMX10P14</b> 14 W/m (5m max.) 4.3 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft) <b>010</b> 1m (3.3ft) <b>030</b> 3m (9.8ft) <b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)	<b>.XXXX</b> Length in inches	<b>DMX</b>	
<b>63S2018H</b>	<b>1</b>	<b>RGB</b>						<b>DMX</b>	

## PIXEL - RGBW

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

<b>DRIVER OPTIONS (See driver page for details)</b>
DMX = eldoLED, 24V, 0.1% DMX Dimming

	Pixels	DMX Addresses	Cut Interval	DELIVERED LUMENS lm/ft					
				RED	GREEN	BLUE	2700K	3000K	4000K
<b>DMX10P16</b>	10 /m (3.94")	40 /m (4 /px)	100 mm (3.9")	12	32	7	28	30	32

ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
<b>63S2018H</b> Flex 20x18 Horizontal	<b>1</b> White	<b>RGBW27</b> RGBW(2700K) <b>RGBW30</b> RGBW(3000K) <b>RGBW40</b> RGBW(4000K)	<b>DMX10P16</b> 16 W/m (5m max.) 4.9 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft) <b>010</b> 1m (3.3ft) <b>030</b> 3m (9.8ft) <b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)	<b>.XXXX</b> Length in inches	<b>DMX</b>	
<b>63S2018H</b>	<b>1</b>		<b>DMX10P16</b>					<b>DMX</b>	

# FLEX 20x18 HORIZONTAL


0.79x0.71"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB / RGBW
- PIXEL
- DRIVERS
- IES FILES

## ACCESSORIES

**TYPE** Aluminum profile  
**MOUNTING** Surface mount

ORDERING INFORMATION		
MODEL	FINISH	LENGTH
<b>63S2018X</b>	<b>5AP</b> Silver	<b>0030</b> 30mm (1.18")
	<b>2AP</b> Black	<b>1000</b> 1000mm (39.37")
<b>63S2018X</b>		

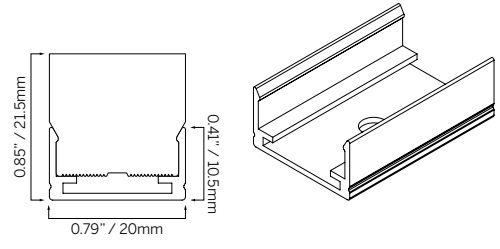

30

1000



**TYPE** Stainless bendable profile  
**MOUNTING** Surface mount

ORDERING INFORMATION		
MODEL	FINISH	LENGTH
<b>63S2018X</b>	<b>5SC</b> Silver	<b>1000</b> 1000mm (39.37")
	<b>2SC</b> Black	
<b>63S2018X</b>		<b>1000</b>

