
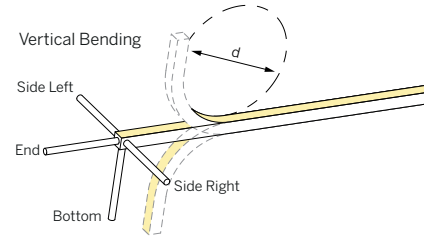


# FLEX 20x18 VERTICAL BLACK

0.79x0.71"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB / RGBW
- PIXEL



SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

## STATIC WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
S05 50 mm (2")	4	5	5	6	6	6	6
S12 50 mm (2")	9	12	12	13	13	14	14

- DRIVERS
- IES FILES

ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
<b>63S2018V</b> Flex 20x18 Vertical	2 Black	<b>C18</b> 1800K	<b>S05</b> 5 W/m (15m max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft)	.XXXX Length in inches	<b>D010</b> <b>EL96</b> <b>DPH</b> <b>L3D0E</b> <b>DALI-DT6</b> <b>UNV96-WL</b> <b>UNV384-WL</b>	
		<b>C24</b> 2400K	1.5 W/ft (49.2ft max.)			<b>010</b> 1m (3.3ft)			
		<b>C27</b> 2700K	<b>S12</b> 12 W/m (6m max.)			<b>030</b> 3m (9.8ft)			
		<b>C30</b> 3000K	3.7 W/ft (19.7ft max.)			<b>050</b> 5m (16.4ft)			
		<b>C35</b> 3500K				<b>100</b> 10m (32.8ft)			
		<b>C40</b> 4000K							
<b>C60</b> 6000K									
<b>63S2018V</b>	<b>2</b>								

## STATIC WHITE - HIGH OUTPUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
<b>S13</b> 62.5 mm (2.5")	15	20	21	23	24	23	24



ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
<b>63S2018HOV</b> Flex 20x18 Vertical High Output	2 Black	<b>C18</b> 1800K	<b>S13</b> 13.5 W/m (5m max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft)	.XXXX Length in inches	<b>D010</b> <b>EL96</b> <b>DPH</b> <b>L3D0E</b> <b>DALI-DT6</b> <b>UNV96-WL</b> <b>UNV384-WL</b>	
		<b>C24</b> 2400K	4.1 W/ft (16.4ft max.)			<b>010</b> 1m (3.3ft)			
		<b>C27</b> 2700K				<b>030</b> 3m (9.8ft)			
		<b>C30</b> 3000K				<b>050</b> 5m (16.4ft)			
		<b>C35</b> 3500K				<b>100</b> 10m (32.8ft)			
		<b>C40</b> 4000K							
<b>C60</b> 6000K									
<b>63S2018HOV</b>	<b>2</b>		<b>S13</b>						

# FLEX 20x18 VERTICAL BLACK

0.79x0.71"



- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB/RGBW
- PIXEL

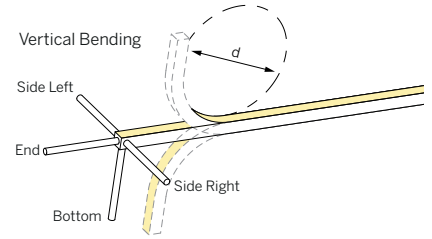

SPECIFICATION	
<b>MATERIAL</b>	Silicone
<b>MOUNTING</b>	Surface
<b>IP RATING</b>	IP67, IP20
<b>BINNING</b>	3 Step
<b>LIFETIME (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data
<b>DRIVER REQUIREMENT</b>	24VDC Constant voltage
<b>PROTECTION</b>	UV, flame, salt and chlorine resistant
<b>WARRANTY</b>	5 Years

## STATIC WHITE FREE CUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 300 mm)

- DRIVERS
- IES FILES

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V



Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
<b>SF05</b> Free Cut	4	4	5	5	5	5	5
<b>SF12</b> Free Cut	7	10	12	12	12	13	12

- ACCESSORIES

ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
<b>63S2018V</b> Flex 20x18 Vertical	<b>2</b> Black	<b>C18</b> 1800K	<b>SF05</b> 5 W/m (12.5m max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft)	.XXXX Length in inches	<b>D010</b> <b>EL96</b> <b>DPH</b> <b>L3D0E</b> <b>DALI-DT6</b> <b>UNV96-WL</b> <b>UNV384-WL</b>	
		<b>C24</b> 2400K	1.5 W/ft (41ft max.)			<b>010</b> 1m (3.3ft)			
		<b>C27</b> 2700K	<b>SF12</b> 12 W/m (6m max.)			<b>030</b> 3m (9.8ft)			
		<b>C30</b> 3000K	3.7 W/ft (19.7ft max.)			<b>050</b> 5m (16.4ft)			
		<b>C35</b> 3500K				<b>100</b> 10m (32.8ft)			
		<b>C40</b> 4000K							
<b>C60</b> 6000K									
<b>63S2018V</b>	<b>2</b>								

# FLEX 20x18 VERTICAL BLACK

0.79x0.71"

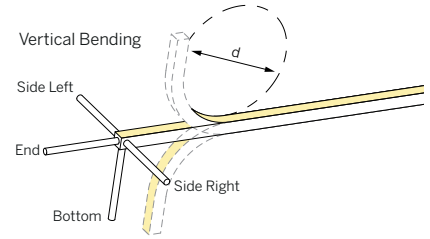

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

## TUNABLE WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)	
DALI-DT6	= eldoLED DALI (DT6), 0.1% dimming, 120-277V
DALI-DT8	= eldoLED DALI (DT8), 0.1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft							
	1800K	2400K	2700K	3000K	3500K	4000K	6000K	
CT10 62.5 mm (2.5")	7	9	10	10	10	11	11	

ORDERING INFORMATION									
MODEL	JACKET	CCT (LOW)	CCT (HIGH)	LED TYPE*	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S2018V</b> Flex 20x18 Vertical	2 Black	<b>C18</b> 1800K	<b>24</b> 2400K	<b>CT10</b> 2x9.6 W/m (7m max.) 2x2.9 W/ft (23ft max.)  *Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft)	<b>.XXXX</b> Length in inches	<b>DALI-DT6</b> <b>DALI-DT8</b>
		<b>C24</b> 2400K	<b>27</b> 2700K				<b>010</b> 1m (3.3ft)		
		<b>C27</b> 2700K	<b>30</b> 3000K				<b>030</b> 3m (9.8ft)		
		<b>C30</b> 3000K	<b>35</b> 3500K				<b>050</b> 5m (16.4ft)		
		<b>C35</b> 3500K	<b>40</b> 4000K				<b>100</b> 10m (32.8ft)		
<b>63S2018V</b>	<b>2</b>			<b>CT10</b>					

## TUNABLE WHITE - HIGH OUTPUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)	
DALI-DT6	= eldoLED DALI (DT6), 0.1% dimming, 120-277V
DALI-DT8	= eldoLED DALI (DT8), 0.1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft							
	1800K	2400K	2700K	3000K	3500K	4000K	6000K	
CT10 83.3mm (3.3")	10	15	16	16	17	17	18	
CT13 83.3mm (3.3")	13	19	21	22	22	22	23	



ORDERING INFORMATION									
MODEL	JACKET	CCT (LOW)	CCT (HIGH)	LED TYPE*	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S2018HOV</b> Flex 20x18 Vertical High Output	2 Black	<b>C18</b> 1800K	<b>24</b> 2400K	<b>CT10</b> 2x10 W/m (4m max.) 2x3 W/ft (13.1ft max.)  <b>CT13</b> 2x13 W/m (3m max.) 2x4 W/ft (9.8ft max.)  *Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft)	<b>.XXXX</b> Length in inches	<b>DALI-DT6</b> <b>DALI-DT8</b>
		<b>C24</b> 2400K	<b>27</b> 2700K				<b>010</b> 1m (3.3ft)		
		<b>C27</b> 2700K	<b>30</b> 3000K				<b>030</b> 3m (9.8ft)		
		<b>C30</b> 3000K	<b>35</b> 3500K				<b>050</b> 5m (16.4ft)		
		<b>C35</b> 3500K	<b>40</b> 4000K				<b>100</b> 10m (32.8ft)		
<b>63S2018HOV</b>	<b>2</b>								

# FLEX 20x18 VERTICAL BLACK

0.79x0.71"



- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB / RGBW
- PIXEL

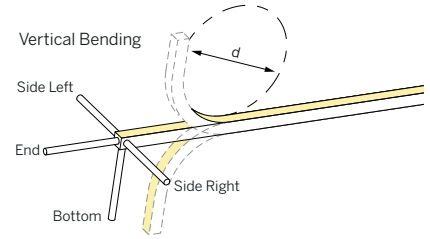

SPECIFICATION	
<b>MATERIAL</b>	Silicone
<b>MOUNTING</b>	Surface
<b>IP RATING</b>	IP67, IP20
<b>BINNING</b>	3 Step
<b>LIFETIME (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data
<b>DRIVER REQUIREMENT</b>	24VDC Constant voltage
<b>PROTECTION</b>	UV, flame, salt and chlorine resistant
<b>WARRANTY</b>	5 Years

## WARM DIM (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 300 mm)

- DRIVERS

DRIVER OPTIONS (See driver page for details)
MAGSDM96-WD = 0-10V / Phase Dim 96W, 0.1% CCR Dimming for Warm Dim, 120-277V (Phase - 120V only)

	Cut Interval	DELIVERED LUMENS lm/ft	
		2700K	3000K
<b>14R</b>	83.33 mm (3.3")	10	12

- IES FILES

ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
<b>63S2018V</b> Flex 20x18 Vertical	<b>2</b> Black	<b>C2718W</b> 2700-1800K <b>C3018W</b> 3000-1800K	<b>14R</b> 14 W/m (5m max.) 4.3 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft) <b>010</b> 1m (3.3ft) <b>030</b> 3m (9.8ft) <b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)	<b>.XXXX</b> Length in inches	<b>MAGSDM96-WD</b>	
<b>63S2018V</b>	<b>2</b>		<b>14R</b>					<b>MAGSDM96-WD</b>	



- ACCESSORIES

# FLEX 20x18 VERTICAL BLACK

0.79x0.71"



- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB / RGBW
- PIXEL

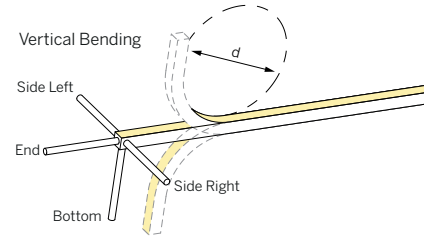

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

## RGB

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)
DMX = eldoLED, 24V, 0.1% DMX Dimming

	DELIVERED LUMENS lm/ft			
	Cut Interval	RED	GREEN	BLUE
L12	100 mm (3.9")	2	4	1

ORDERING INFORMATION										
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS		
<b>63S2018V</b> Flex 20x18 Vertical	<b>2</b> Black	<b>RGB</b> RGB	<b>L12</b> 12 W/m (5m max.) 3.7 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft) <b>010</b> 1m (3.3ft) <b>030</b> 3m (9.8ft) <b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)	<b>.XXXX</b> Length in inches	<b>DMX</b>		
<b>63S2018V</b>	<b>2</b>	<b>RGB</b>	<b>L12</b>					<b>DMX</b>		

## RGBW

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)
DMX = eldoLED, 24V, 0.1% DMX Dimming

	DELIVERED LUMENS lm/ft						
	Cut Interval	RED	GREEN	BLUE	2700K	3000K	4000K
L16	100 mm (3.9")	2	4	1	4	5	5



ORDERING INFORMATION										
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS		
<b>63S2018V</b> Flex 20x18 Vertical	<b>2</b> Black	<b>RGBW30</b> RGBW(3000K) <b>RGBW40</b> RGBW(4000K)	<b>L16</b> 16 W/m (5m max.) 4.9 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft) <b>010</b> 1m (3.3ft) <b>030</b> 3m (9.8ft) <b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)	<b>.XXXX</b> Length in inches	<b>DMX</b>		
<b>63S2018V</b>	<b>2</b>		<b>L16</b>					<b>DMX</b>		



# FLEX 20x18 VERTICAL BLACK

0.79x0.71"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB / RGBW
- PIXEL

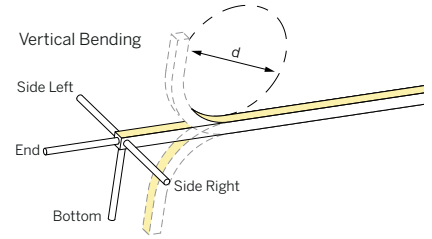

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

## PIXEL - STATIC WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)
DMX = eldoLED, 24V, 0.1% DMX Dimming

	Pixels	DMX Addresses	Cut Interval	DELIVERED LUMENS lm/ft							
				1800K	2400K	2700K	3000K	3500K	4000K	6000K	
<b>DMX10P13</b>	10 /m (3.94")	10 /m (1 /px)	100 mm (3.9")	52	68	74	80	82	84	83	

- DRIVERS
- IES FILES

ORDERING INFORMATION										
MODEL	JACKET	CCT	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
<b>63S2018V</b> Flex 20x18 Vertical	2 Black	<b>C18</b> 1800K	<b>DMX10P13</b> 13.5 W/m (5m max.) 4.1 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft) <b>010</b> 1m (3.3ft) <b>030</b> 3m (9.8ft) <b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)	<b>.XXXX</b> Length in inches	<b>DMX</b>		
		<b>C24</b> 2400K								
		<b>C27</b> 2700K								
		<b>C30</b> 3000K								
		<b>C35</b> 3500K								
		<b>C40</b> 4000K								
		<b>C60</b> 6000K								
<b>63S2018V</b>	<b>2</b>		<b>DMX10P13</b>					<b>DMX</b>		

## PIXEL - TUNABLE WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)
DMX = eldoLED, 24V, 0.1% DMX Dimming

	Pixels	DMX Addresses	Cut Interval	DELIVERED LUMENS lm/ft							
				1800K	2400K	2700K	3000K	3500K	4000K	6000K	
<b>CTDMX10P13</b>	10 /m (3.94")	20 /m (2 /px)	100 mm (3.9")	4	6	6	7	7	7	7	

- ACCESSORIES



ORDERING INFORMATION											
MODEL	JACKET	CCT	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS		
<b>63S2018V</b> Flex 20x18 Vertical	2 Black	<b>C18</b> 1800K	<b>24</b> 2400K	<b>CTDMX10P13</b> 13.5 W/m (5m max.) 4.1 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft) <b>010</b> 1m (3.3ft) <b>030</b> 3m (9.8ft) <b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)	<b>.XXXX</b> Length in inches	<b>DMX</b>		
		<b>C24</b> 2400K	<b>27</b> 2700K								
		<b>C27</b> 2700K	<b>30</b> 3000K								
		<b>C30</b> 3000K	<b>35</b> 3500K								
		<b>C35</b> 3500K	<b>40</b> 4000K								
		<b>C40</b> 4000K	<b>60</b> 6000K								
		<b>63S2018V</b>	<b>2</b>								<b>CTDMX10P13</b>

# FLEX 20x18 VERTICAL BLACK

0.79x0.71"



- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB / RGBW
- PIXEL

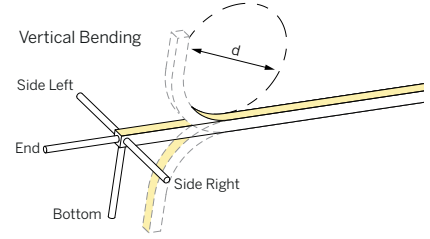

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

## PIXEL - RGB

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

<b>DRIVER OPTIONS (See driver page for details)</b>
DMX = eldoLED, 24V, 0.1% DMX Dimming

	Pixels	DMX Addresses	Cut Interval	DELIVERED LUMENS lm/ft		
				RED	GREEN	BLUE
<b>DMX02P14</b>	2 /m (19.7")	6 /m (3 /px)	500 mm (19.7")	1	4	1
<b>DMX10P14</b>	10 /m (3.94")	30 /m (3 /px)	100 mm (3.9")	1	4	1

- DRIVERS
- IES FILES

ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
<b>63S2018V</b> Flex 20x18 Vertical	2 Black	RGB RGB	<b>DMX02P14</b> 14 W/m (5m max.) 4.3 W/ft (16.4ft max.)	<b>E</b> End	<b>7</b> IP67	<b>003</b> 0.3m (1ft)	.XXXX Length in inches	<b>DMX</b>	
			<b>DMX10P14</b> 14 W/m (5m max.) 4.3 W/ft (16.4ft max.)	<b>B</b> Bottom	<b>2</b> IP20	<b>010</b> 1m (3.3ft)			
				<b>SL</b> Side Left		<b>030</b> 3m (9.8ft)			
				<b>SR</b> Side Right		<b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)			
<b>63S2018V</b>	<b>2</b>	<b>RGB</b>						<b>DMX</b>	

## PIXEL - RGBW

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

<b>DRIVER OPTIONS (See driver page for details)</b>
DMX = eldoLED, 24V, 0.1% DMX Dimming

	Pixels	DMX Addresses	Cut Interval	DELIVERED LUMENS lm/ft					
				RED	GREEN	BLUE	2700K	3000K	4000K
<b>DMX10P16</b>	10 /m (3.94")	40 /m (4 /px)	100 mm (3.9")	1	2	1	2	2	2

- ACCESSORIES

ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
<b>63S2018V</b> Flex 20x18 Vertical	2 Black	RGBW27 RGBW(2700K) RGBW30 RGBW(3000K) RGBW40 RGBW(4000K)	<b>DMX10P16</b> 16 W/m (5m max.) 4.9 W/ft (16.4ft max.)	<b>E</b> End	<b>7</b> IP67	<b>003</b> 0.3m (1ft)	.XXXX Length in inches	<b>DMX</b>	
				<b>B</b> Bottom	<b>2</b> IP20	<b>010</b> 1m (3.3ft)			
				<b>SL</b> Side Left		<b>030</b> 3m (9.8ft)			
				<b>SR</b> Side Right		<b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)			
<b>63S2018V</b>	<b>2</b>		<b>DMX10P16</b>					<b>DMX</b>	



# FLEX 20x18 VERTICAL BLACK


0.79x0.71"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB / RGBW
- PIXEL
- DRIVERS
- IES FILES

## ACCESSORIES

**TYPE** Aluminum profile  
**MOUNTING** Surface mount

ORDERING INFORMATION		
MODEL	FINISH	LENGTH
<b>63S2018X</b>	<b>5AP</b> Silver	<b>0030</b> 30mm (1.18")
	<b>2AP</b> Black	<b>1000</b> 1000mm (39.37")
<b>63S2018X</b>		

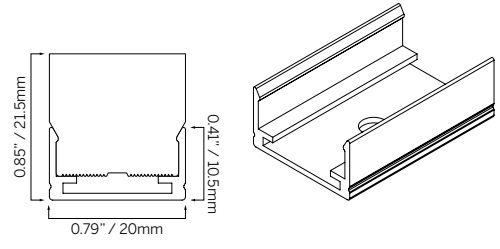

30

1000



**TYPE** Stainless bendable profile  
**MOUNTING** Surface mount

ORDERING INFORMATION		
MODEL	FINISH	LENGTH
<b>63S2018X</b>	<b>5SC</b> Silver	<b>1000</b> 1000mm (39.37")
	<b>2SC</b> Black	
<b>63S2018X</b>		<b>1000</b>

