
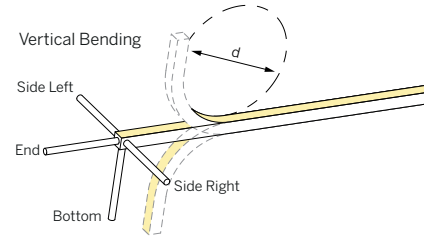


# FLEX 20x18 VERTICAL DOMED

0.79x0.71"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB/RGBW
- PIXEL



SPECIFICATION	
<b>MATERIAL</b>	Silicone
<b>MOUNTING</b>	Surface
<b>IP RATING</b>	IP67, IP20
<b>BINNING</b>	3 Step
<b>LIFETIME (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data
<b>DRIVER REQUIREMENT</b>	24VDC Constant voltage
<b>PROTECTION</b>	UV, flame, salt and chlorine resistant
<b>WARRANTY</b>	5 Years

## STATIC WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
S05 50 mm (2")	79	102	112	121	123	127	125
S12 50 mm (2")	181	237	259	279	284	293	288

ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
<b>63S2018VD</b> Flex 20x18 Vertical Domed	1 White	<b>C18</b> 1800K	<b>S05</b> 5 W/m (15m max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft)	.XXXX Length in inches	<b>D010</b> <b>EL96</b> <b>DPH</b> <b>L3D0E</b> <b>DALI-DT6</b> <b>UNV96-WL</b> <b>UNV384-WL</b>	
		<b>C24</b> 2400K	1.5 W/ft (49.2ft max.)			<b>010</b> 1m (3.3ft)			
		<b>C27</b> 2700K	<b>S12</b> 12 W/m (6m max.)			<b>030</b> 3m (9.8ft)			
		<b>C30</b> 3000K	3.7 W/ft (19.7ft max.)			<b>050</b> 5m (16.4ft)			
		<b>C35</b> 3500K				<b>100</b> 10m (32.8ft)			
		<b>C40</b> 4000K							
<b>C60</b> 6000K									
<b>63S2018VD</b>	<b>1</b>		<b>S12</b>						

## STATIC WHITE - HIGH OUTPUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
S13 62.5mm (2.5")	311	408	441	479	489	489	496



ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
<b>63S2018HOVD</b> Flex 20x18 Vertical Domed High Output	1 White	<b>C18</b> 1800K	<b>S13</b> 13.5 W/m (5m max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft)	.XXXX Length in inches	<b>D010</b> <b>EL96</b> <b>DPH</b> <b>L3D0E</b> <b>DALI-DT6</b> <b>UNV96-WL</b> <b>UNV384-WL</b>	
		<b>C24</b> 2400K	4.1 W/ft (16.4ft max.)			<b>010</b> 1m (3.3ft)			
		<b>C27</b> 2700K				<b>030</b> 3m (9.8ft)			
		<b>C30</b> 3000K				<b>050</b> 5m (16.4ft)			
		<b>C35</b> 3500K				<b>100</b> 10m (32.8ft)			
		<b>C40</b> 4000K							
<b>C60</b> 6000K									
<b>63S2018HOVD</b>	<b>1</b>		<b>S13</b>						

# FLEX 20x18 VERTICAL DOMED

0.79x0.71"



- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB/RGBW
- PIXEL

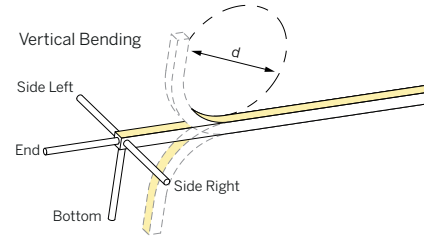

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

## STATIC WHITE FREE CUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 300 mm)

- DRIVERS
- IES FILES

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
SF05 Free Cut	68	90	104	105	107	115	109
SF12 Free Cut	157	205	239	241	246	266	250

- ACCESSORIES



ORDERING INFORMATION									
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS	
<b>63S2018VD</b> Flex 20x18 Vertical Domed	<b>1</b> White	<b>C18</b> 1800K	<b>SF05</b> 5 W/m (12.5m max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft)	.XXXX Length in inches	<b>D010</b> <b>EL96</b> <b>DPH</b> <b>L3D0E</b> <b>DALI-DT6</b> <b>UNV96-WL</b> <b>UNV384-WL</b>	
		<b>C24</b> 2400K	1.5 W/ft (41ft max.)			<b>010</b> 1m (3.3ft)			
		<b>C27</b> 2700K	<b>SF12</b> 12 W/m (6m max.)			<b>030</b> 3m (9.8ft)			
		<b>C30</b> 3000K	3.7 W/ft (19.7ft max.)			<b>050</b> 5m (16.4ft)			
		<b>C35</b> 3500K				<b>100</b> 10m (32.8ft)			
		<b>C40</b> 4000K							
<b>C60</b> 6000K									
<b>63S2018VD</b>	<b>1</b>								



# FLEX 20x18 VERTICAL DOMED

0.79x0.71"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB/RGBW
- PIXEL

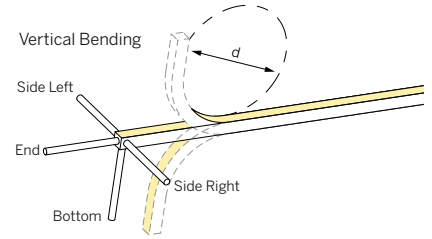

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

## TUNABLE WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)	
DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V	
DALI-DT8 = eldoLED DALI (DT8), 0.1% dimming, 120-277V	

Cut Interval	DELIVERED LUMENS lm/ft							
	1800K	2400K	2700K	3000K	3500K	4000K	6000K	
CT10 62.5 mm (2.5")	135	188	207	218	219	222	230	

- DRIVERS
- IES FILES

ORDERING INFORMATION									
MODEL	JACKET	CCT (LOW)	CCT (HIGH)	LED TYPE*	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S2018VD Flex 20x18 Vertical Domed	1 White	C18 1800K	24 2400K	CT10 2x9.6 W/m (7m max.) 2x2.9 W/ft (23ft max.)  * Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft)	.XXXX Length in inches	DALI-DT6 DALI-DT8
		C24 2400K	27 2700K				010 1m (3.3ft)		
		C27 2700K	30 3000K				030 3m (9.8ft)		
		C30 3000K	35 3500K				050 5m (16.4ft)		
		C35 3500K	40 4000K				100 10m (32.8ft)		
		C40 4000K	60 6000K						
63S2018VD	1			CT10					

## TUNABLE WHITE - HIGH OUTPUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 300 mm)

DRIVER OPTIONS (See driver page for details)	
DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V	
DALI-DT8 = eldoLED DALI (DT8), 0.1% dimming, 120-277V	

Cut Interval	DELIVERED LUMENS lm/ft							
	1800K	2400K	2700K	3000K	3500K	4000K	6000K	
CT10 83.3mm (3.3")	215	301	330	347	351	354	368	
CT13 83.3mm (3.3")	279	391	429	451	455	460	478	



ORDERING INFORMATION									
MODEL	JACKET	CCT (LOW)	CCT (HIGH)	LED TYPE*	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S2018HOVD Flex 20x18 Vertical Domed High Output	1 White	C18 1800K	24 2400K	CT10 2x10 W/m (4m max.) 2x3 W/ft (13.1ft max.) CT13 2x13 W/m (3m max.) 2x4 W/ft (9.8ft max.)  * Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft)	.XXXX Length in inches	DALI-DT6 DALI-DT8
		C24 2400K	27 2700K				010 1m (3.3ft)		
		C27 2700K	30 3000K				030 3m (9.8ft)		
		C30 3000K	35 3500K				050 5m (16.4ft)		
		C35 3500K	40 4000K				100 10m (32.8ft)		
		C40 4000K	60 6000K						
63S2018HOVD	1								

# FLEX 20x18 VERTICAL DOMED

0.79x0.71"



- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB/RGBW
- PIXEL

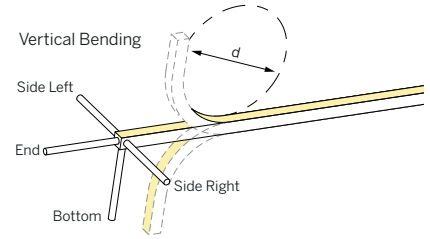

SPECIFICATION	
<b>MATERIAL</b>	Silicone
<b>MOUNTING</b>	Surface
<b>IP RATING</b>	IP67, IP20
<b>BINNING</b>	3 Step
<b>LIFETIME (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data
<b>DRIVER REQUIREMENT</b>	24VDC Constant voltage
<b>PROTECTION</b>	UV, flame, salt and chlorine resistant
<b>WARRANTY</b>	5 Years

## WARM DIM (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >9.8" / 300 mm)

- DRIVERS

**DRIVER OPTIONS (See driver page for details)**  
 MAGSDM96-WD = 0-10V / Phase Dim 96W, 0.1% CCR Dimming for Warm Dim, 120-277V (Phase - 120V only)

	Cut Interval	DELIVERED LUMENS lm/ft	
		2700K	3000K
<b>14R</b>	83.33 mm (3.3")	219	238

- IES FILES
- ACCESSORIES



ORDERING INFORMATION										
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH			DRIVERS
<b>63S2018VD</b> Flex 20x18 Vertical Domed	<b>1</b> White	<b>C2718W</b> 2700-1800K	<b>14R</b> 14 W/m (5m max.) 4.3 W/ft (16.4ft max.)	<b>E</b> End	<b>7</b> IP67	<b>003</b> 0.3m (1ft)	<b>.XXXX</b> Length in inches			<b>MAGSDM96-WD</b>
		<b>C3018W</b> 3000-1800K		<b>B</b> Bottom	<b>2</b> IP20	<b>010</b> 1m (3.3ft)				
				<b>SL</b> Side Left		<b>030</b> 3m (9.8ft)				
				<b>SR</b> Side Right		<b>050</b> 5m (16.4ft)				
						<b>100</b> 10m (32.8ft)				
<b>63S2018VD</b>	<b>1</b>		<b>14R</b>							<b>MAGSDM96-WD</b>

# FLEX 20x18 VERTICAL DOMED

0.79x0.71"



- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB/RGBW
- PIXEL

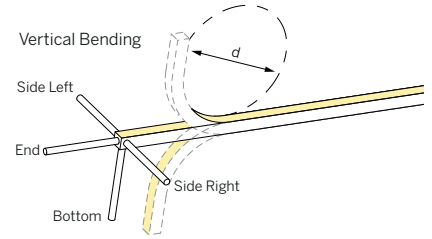

SPECIFICATION	
<b>MATERIAL</b>	Silicone
<b>MOUNTING</b>	Surface
<b>IP RATING</b>	IP67, IP20
<b>BINNING</b>	3 Step
<b>LIFETIME (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data
<b>DRIVER REQUIREMENT</b>	24VDC Constant voltage
<b>PROTECTION</b>	UV, flame, salt and chlorine resistant
<b>WARRANTY</b>	5 Years

## RGB

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

<b>DRIVER OPTIONS (See driver page for details)</b>
DMX = eldoLED, 24V, 0.1% DMX Dimming

	Cut Interval	DELIVERED LUMENS lm/ft		
		RED	GREEN	BLUE
<b>L12</b>	100 mm (3.9")	37	99	23

ORDERING INFORMATION										
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS		
<b>63S2018VD</b> Flex 20x18 Vertical Domed	<b>1</b> White	<b>RGB</b> RGB	<b>L12</b> 12 W/m (5m max.) 3.7 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft) <b>010</b> 1m (3.3ft) <b>030</b> 3m (9.8ft) <b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)	<b>.XXXX</b> Length in inches	<b>DMX</b>		
<b>63S2018VD</b>	<b>1</b>	<b>RGB</b>	<b>L12</b>					<b>DMX</b>		

## RGBW

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

<b>DRIVER OPTIONS (See driver page for details)</b>
DMX = eldoLED, 24V, 0.1% DMX Dimming

	Cut Interval	DELIVERED LUMENS lm/ft					
		RED	GREEN	BLUE	2700K	3000K	4000K
<b>L16</b>	100 mm (3.9")	37	99	23	85	93	97

ORDERING INFORMATION										
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS		
<b>63S2018VD</b> Flex 20x18 Vertical Domed	<b>1</b> White	<b>RGBW27</b> RGBW(2700K) <b>RGBW30</b> RGBW(3000K) <b>RGBW40</b> RGBW(4000K)	<b>L16</b> 16 W/m (5m max.) 4.9 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft) <b>010</b> 1m (3.3ft) <b>030</b> 3m (9.8ft) <b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)	<b>.XXXX</b> Length in inches	<b>DMX</b>		
<b>63S2018VD</b>	<b>1</b>		<b>L16</b>					<b>DMX</b>		





# FLEX 20x18 VERTICAL DOMED

0.79x0.71"



- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB / RGBW
- PIXEL

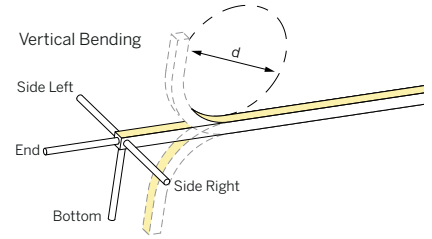

SPECIFICATION	
<b>MATERIAL</b>	Silicone
<b>MOUNTING</b>	Surface
<b>IP RATING</b>	IP67, IP20
<b>BINNING</b>	3 Step
<b>LIFETIME (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data
<b>DRIVER REQUIREMENT</b>	24VDC Constant voltage
<b>PROTECTION</b>	UV, flame, salt and chlorine resistant
<b>WARRANTY</b>	5 Years

## PIXEL - STATIC WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

<b>DRIVER OPTIONS (See driver page for details)</b>
DMX = eldoLED, 24V, 0.1% DMX Dimming

	Pixels	DMX Addresses	Cut Interval	DELIVERED LUMENS lm/ft						
				1800K	2400K	2700K	3000K	3500K	4000K	6000K
<b>DMX10P13</b>	10 /m (3.94")	10 /m (1 /px)	100 mm (3.9")	181	237	256	279	284	291	288

- DRIVERS
- IES FILES

ORDERING INFORMATION											
MODEL	JACKET	CCT	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS		
<b>63S2018VD</b> Flex 20x18 Vertical Domed	<b>1</b> White	<b>C18</b> 1800K	<b>24</b> 2400K	<b>DMX10P13</b> 13.5 W/m (5m max.) 4.1 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft)	<b>.XXXX</b> Length in inches	<b>DMX</b>		
		<b>C24</b> 2400K	<b>27</b> 2700K				<b>010</b> 1m (3.3ft)				
		<b>C27</b> 2700K	<b>30</b> 3000K				<b>030</b> 3m (9.8ft)				
		<b>C30</b> 3000K	<b>35</b> 3500K				<b>050</b> 5m (16.4ft)				
		<b>C35</b> 3500K	<b>40</b> 4000K				<b>100</b> 10m (32.8ft)				
		<b>C40</b> 4000K	<b>60</b> 6000K								
<b>63S2018VD</b>	<b>1</b>			<b>DMX10P13</b>					<b>DMX</b>		

## PIXEL - TUNABLE WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

<b>DRIVER OPTIONS (See driver page for details)</b>
DMX = eldoLED, 24V, 0.1% DMX Dimming



	Pixels	DMX Addresses	Cut Interval	DELIVERED LUMENS lm/ft						
				1800K	2400K	2700K	3000K	3500K	4000K	6000K
<b>CTDMX10P13</b>	10 /m (3.94")	20 /m (2 /px)	100 mm (3.9")	84	118	129	136	137	138	146

ORDERING INFORMATION											
MODEL	JACKET	CCT	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS		
<b>63S2018VD</b> Flex 20x18 Vertical Domed	<b>1</b> White	<b>C18</b> 1800K	<b>24</b> 2400K	<b>CTDMX10P13</b> 13.5 W/m (5m max.) 4.1 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft)	<b>.XXXX</b> Length in inches	<b>DMX</b>		
		<b>C24</b> 2400K	<b>27</b> 2700K				<b>010</b> 1m (3.3ft)				
		<b>C27</b> 2700K	<b>30</b> 3000K				<b>030</b> 3m (9.8ft)				
		<b>C30</b> 3000K	<b>35</b> 3500K				<b>050</b> 5m (16.4ft)				
		<b>C35</b> 3500K	<b>40</b> 4000K				<b>100</b> 10m (32.8ft)				
		<b>C40</b> 4000K	<b>60</b> 6000K								
<b>63S2018VD</b>	<b>1</b>			<b>CTDMX10P13</b>					<b>DMX</b>		

# FLEX 20x18 VERTICAL DOMED

0.79x0.71"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB / RGBW
- PIXEL

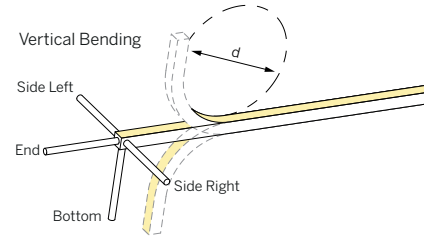

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

## PIXEL - RGB

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

<b>DRIVER OPTIONS (See driver page for details)</b>
DMX = eldoLED, 24V, 0.1% DMX Dimming

	Pixels	DMX Addresses	Cut Interval	DELIVERED LUMENS lm/ft		
				RED	GREEN	BLUE
<b>DMX02P14</b>	2 /m (19.7")	6 /m (3 /px)	500 mm (19.7")	26	68	16
<b>DMX10P14</b>	10 /m (3.94")	30 /m (3 /px)	100 mm (3.9")	26	68	16

## ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S2018VD</b> Flex 20x18 Vertical Domed	<b>1</b> White	<b>RGB</b> RGB	<b>DMX02P14</b> 14 W/m (5m max.) 4.3 W/ft (16.4ft max.) <b>DMX10P14</b> 14 W/m (5m max.) 4.3 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft) <b>010</b> 1m (3.3ft) <b>030</b> 3m (9.8ft) <b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)	<b>.XXXX</b> Length in inches	<b>DMX</b>
<b>63S2018VD</b>	<b>1</b>	<b>RGB</b>						<b>DMX</b>

## PIXEL - RGBW

SPECIFICATION (MINIMUM BEND DIAMETER >11.8" / 300 mm)

<b>DRIVER OPTIONS (See driver page for details)</b>
DMX = eldoLED, 24V, 0.1% DMX Dimming

	Pixels	DMX Addresses	Cut Interval	DELIVERED LUMENS lm/ft					
				RED	GREEN	BLUE	2700K	3000K	4000K
<b>DMX10P16</b>	10 /m (3.94")	40 /m (4 /px)	100 mm (3.9")	18	49	11	43	46	48

## ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
<b>63S2018VD</b> Flex 20x18 Vertical Domed	<b>1</b> White	<b>RGBW27</b> RGBW(2700K) <b>RGBW30</b> RGBW(3000K) <b>RGBW40</b> RGBW(4000K)	<b>DMX10P16</b> 16 W/m (5m max.) 4.9 W/ft (16.4ft max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67 <b>2</b> IP20	<b>003</b> 0.3m (1ft) <b>010</b> 1m (3.3ft) <b>030</b> 3m (9.8ft) <b>050</b> 5m (16.4ft) <b>100</b> 10m (32.8ft)	<b>.XXXX</b> Length in inches	<b>DMX</b>
<b>63S2018VD</b>	<b>1</b>		<b>DMX10P16</b>					<b>DMX</b>

# FLEX 20x18 VERTICAL DOMED


0.79x0.71"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM
- RGB / RGBW
- PIXEL
- DRIVERS
- IES FILES

## ACCESSORIES

**TYPE** Aluminum profile  
**MOUNTING** Surface mount

ORDERING INFORMATION		
MODEL	FINISH	LENGTH
<b>63S2018X</b>	<b>5AP</b> Silver	<b>0030</b> 30mm (1.18")
	<b>2AP</b> Black	<b>1000</b> 1000mm (39.37")
<b>63S2018X</b>		

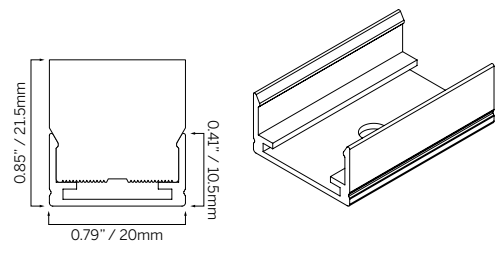

- WARM DIM
- RGB / RGBW
- PIXEL
- DRIVERS
- IES FILES

30

1000



**TYPE** Stainless bendable profile  
**MOUNTING** Surface mount

ORDERING INFORMATION		
MODEL	FINISH	LENGTH
<b>63S2018X</b>	<b>5SC</b> Silver	<b>1000</b> 1000mm (39.37")
	<b>2SC</b> Black	
<b>63S2018X</b>		<b>1000</b>

