




FLEX 5x10 HORIZONTAL

0.2x0.39"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM

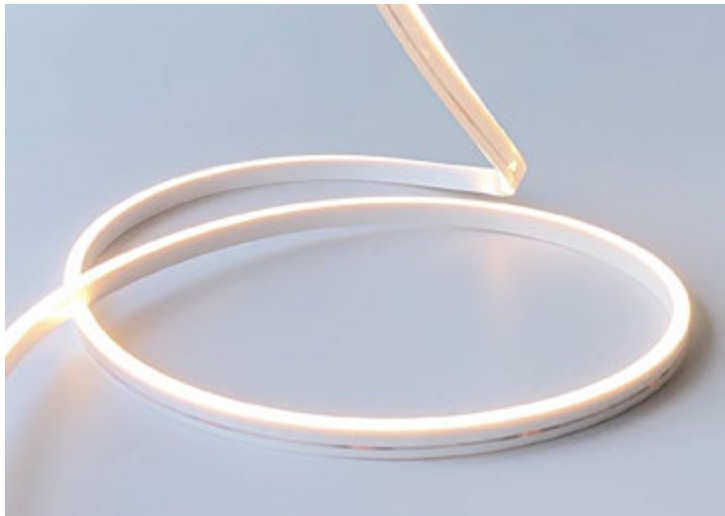

Horizontal Bending

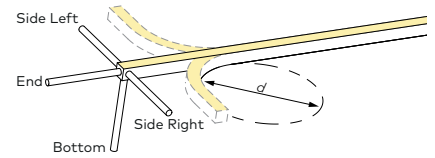

SPECIFICATION

MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS STATIC WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >1.18" / 30 mm)

- DRIVERS
- IES FILES

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
S05 50 mm (2")	29	37	41	44	44	46	46
S10 50 mm (2")	55	73	79	85	87	90	88
L10 50 mm (2")	55	73	79	85	87	90	88

ACCESSORIES ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S0510H Flex 5x10 Horizontal	1 White	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K C60 6000K	S05 5 W/m (8m max.) 1.5 W/ft (26.2ft max.) S10 10 W/m (5m max.) 3 W/ft (16.4ft max.) L10 10 W/m (8m max.) 3 W/ft (26.2ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	D010 EL96 DPH L3D0E DALI-DT6 UNV96-WL UNV384-WL
63S0510H	1							

STATIC WHITE - HIGH OUTPUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >1.18" / 30 mm)

- DRIVER OPTIONS (See driver page for details)

D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
S10 50 mm (2")	64	84	91	99	101	104	102



ACCESSORIES ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S0510HOH Flex 5x10 Horizontal High Output	1 White	C18 1800K C24 2400K C27 2700K C30 3000K C35 3500K C40 4000K C60 6000K	S10 10 W/m (5m max.) 3 W/ft (16.4ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	D010 EL96 DPH L3D0E DALI-DT6 UNV96-WL UNV384-WL
63S0510HOH	1		S10					


FLEX 5x10 HORIZONTAL

0.2x0.39"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM

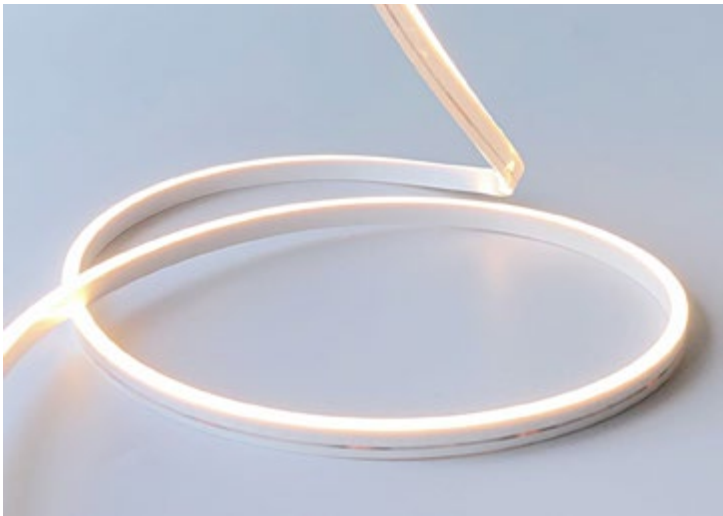

Horizontal Bending

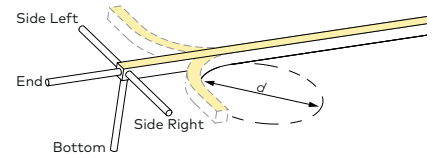

SPECIFICATION

MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS STATIC WHITE FREE CUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >1.18" / 30 mm)

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft						
	1800K	2400K	2700K	3000K	3500K	4000K	6000K
SF05 Free Cut	25	33	38	39	40	43	40
SF10 Free Cut	49	64	74	75	76	83	77



ACCESSORIES ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S0510H Flex 5x10 Horizontal	1 White	C18 1800K	SF05 5 W/m (7.5m max.)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m (1ft)	.XXXX Length in inches	D010 EL96 DPH L3D0E DALI-DT6 UNV96-WL UNV384-WL
		C24 2400K	1.5 W/ft (24.6ft max.)			010 1m (3.3ft)		
		C27 2700K	SF10 10 W/m (5m max.)			030 3m (9.8ft)		
		C30 3000K	3 W/ft (16.4ft max.)			050 5m (16.4ft)		
		C35 3500K				100 10m (32.8ft)		
		C40 4000K						
C60 6000K								
63S0510H	1							


FLEX 5x10 HORIZONTAL

0.2x0.39"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM

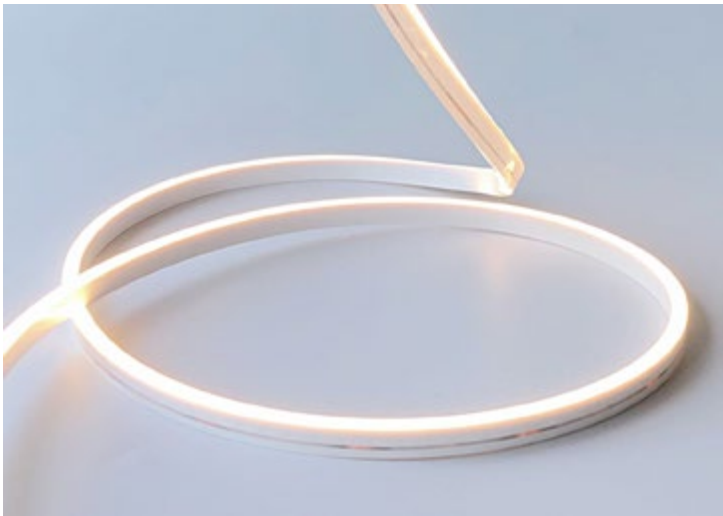

Horizontal Bending

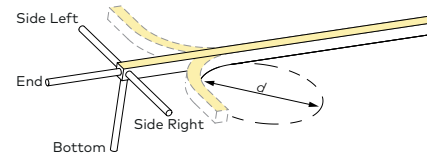

SPECIFICATION

MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS TUNABLE WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >3.9" / 100 mm)

DRIVER OPTIONS (See driver page for details)

DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
DALI-DT8 = eldoLED DALI (DT8), 0.1% dimming, 120-277V

	Cut Interval	DELIVERED LUMENS lm/ft						
		1800K	2400K	2700K	3000K	3500K	4000K	6000K
CT08	50 mm (2")	40	56	62	65	66	66	64


ACCESSORIES ORDERING INFORMATION

MODEL	JACKET	CCT (LOW)	CCT (HIGH)	LED TYPE*	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S0510H Flex 5x10 Horizontal	2 Black	C18 1800K	24 2400K	CT08 2x8 W/m (5m max.) 2x2.4 W/ft (16.4ft max.) <small>* Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.</small>	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft)	.XXXX Length in inches	DALI-DT6 DALI-DT8
		C24 2400K	27 2700K				010 1m (3.3ft)		
		C27 2700K	30 3000K				030 3m (9.8ft)		
		C30 3000K	35 3500K				050 5m (16.4ft)		
		C35 3500K	40 4000K				100 10m (32.8ft)		
		C40 4000K	60 6000K						
63S0510H	2			CT08					


FLEX 5x10 HORIZONTAL

0.2x0.39"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM



Horizontal Bending

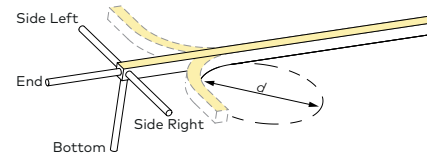

SPECIFICATION

MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS WARM DIM (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >1.18" / 30 mm)

DRIVER OPTIONS (See driver page for details)

MAGSDM96-WD = 0-10V / Phase Dim 96W, 0.1% CCR Dimming for Warm Dim, 120-277V (Phase - 120V only)
--

	Cut Interval	DELIVERED LUMENS lm/ft	
		2700K	3000K
10R	50 mm (2")	60	66

ACCESSORIES ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S0510H Flex 5x10 Horizontal	1 White	C2718W 2700-1800K C3018W 3000-1800K	10R 10 W/m (5m max.) 3 W/ft (16.4ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	MAGSDM96-WD
63S0510H	1		10R		7			MAGSDM96-WD

FLEX 5x10 HORIZONTAL

0.2x0.39"

ACCESSORIES

STATIC
WHITE

TYPE Aluminum profile
MOUNTING Surface mount


FREE
CUT

ORDERING INFORMATION

MODEL	FINISH	LENGTH
63S0510H	5AP Silver	0020 20mm (0.79") 1000 1000mm (39.37")
63S0510H	5AP	

TUNABLE
WHITE

WARM
DIM



DRIVERS

IES
FILES

ACCESSORIES

20



1000



TYPE Stainless Mounting Clip
MOUNTING Surface mount

ORDERING INFORMATION

MODEL	FINISH	LENGTH
63S0510H	5SC Silver	0007 7mm (0.28") 1000 1000mm (39.37")
63S0510H	5SC	

7

