
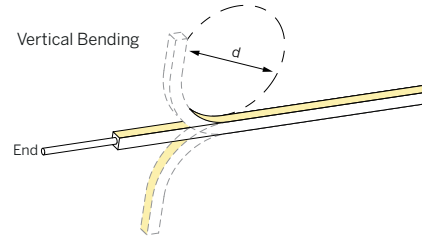


# FLEX 5x3 VERTICAL DOMED

## 0.2x0.12"

STATIC WHITE

STATIC COLOR



### SPECIFICATION

<b>MATERIAL</b>	Silicone
<b>MOUNTING</b>	Surface
<b>IP RATING</b>	IP65
<b>BINNING</b>	3 Step
<b>LIFETIME (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data
<b>DRIVER REQUIREMENT</b>	24VDC Constant voltage
<b>PROTECTION</b>	UV, flame, salt and chlorine resistant
<b>WARRANTY</b>	5 Years

DRIVERS

### STATIC WHITE FREE CUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >1.18" / 30 mm)

IES FILES

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

		DELIVERED LUMENS lm/ft							
		Cut Interval	1800K	2400K	2700K	3000K	3500K	4000K	6000K
<b>SF04</b>	Free Cut	109	143	156	168	171	176	174	
<b>SF08</b>	Free Cut	182	237	260	279	285	293	289	
<b>SF12</b>	Free Cut	252	330	361	388	396	407	401	

ACCESSORIES

ORDERING INFORMATION										
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	ADHESIVE BACKING	LENGTH	DRIVERS	
<b>63S0503VD</b> Flex 5x3 Vertical Domed	<b>1</b> White	<b>C18</b> 1800K	<b>SF04</b> 4 W/m (7m max.) 1.2 W/ft (23ft max.)	<b>E</b> End	<b>5</b> IP65	<b>003</b> 0.3m (1ft)	<b>A</b> 3M Backing (Optional)*  * adhesive backing not compatible with mounting accessories.	<b>.XXXX</b> Length in inches	<b>D010</b> <b>EL96</b> <b>DPH</b> <b>L3D0E</b> <b>DALI-DT6</b> <b>UNV96-WL</b> <b>UNV384-WL</b>	
		<b>C24</b> 2400K	<b>SF08</b> 8 W/m (5m max.) 2.4 W/ft (16.4ft max.)			<b>010</b> 1m (3.3ft)				
		<b>C27</b> 2700K	<b>SF12</b> 12 W/m (4m max.) 3.7 W/ft (13.1ft max.)			<b>030</b> 3m (9.8ft)				
		<b>C30</b> 3000K				<b>050</b> 5m (16.4ft)				
		<b>C35</b> 3500K				<b>100</b> 10m (32.8ft)				
		<b>C40</b> 4000K								
<b>C60</b> 6000K										
<b>63S0503VD</b>	<b>1</b>			<b>E</b>	<b>5</b>					

### STATIC COLOR

SPECIFICATION (MINIMUM BEND DIAMETER >1.18" / 30 mm)

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	
DPH = Phase Dimming, 1% dimming, 120V only	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V

		DELIVERED LUMENS lm/ft			
		Cut Interval	RED	GREEN	BLUE
<b>S05</b>	50 mm (1.96")	57	167	40	
<b>S09</b>	50 mm (1.96")	101	302	71	
<b>S12</b>	50 mm (1.96")	136	403	95	
<b>S14</b>	50 mm (1.96")	158	469	111	

ORDERING INFORMATION										
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	ADHESIVE BACKING	LENGTH	DRIVERS	
<b>63S0503VD</b> Flex 5x3 Vertical Domed	<b>1</b> White	<b>RED</b> Red	<b>S05</b> 5 W/m (5m max.) 1.5 W/ft (16.4ft max.)	<b>E</b> End	<b>5</b> IP65	<b>003</b> 0.3m (1ft)	<b>A</b> 3M Backing (Optional)*  * adhesive backing not compatible with mounting accessories.	<b>.XXXX</b> Length in inches	<b>D010</b> <b>EL96</b> <b>DPH</b> <b>L3D0E</b> <b>DALI-DT6</b>	
		<b>GREEN</b> Green	<b>S09</b> 9 W/m (3m max.) 2.7 W/ft (9.8ft max.)			<b>010</b> 1m (3.3ft)				
		<b>BLUE</b> Blue	<b>S12</b> 12 W/m (3m max.) 3.7 W/ft (9.8ft max.)			<b>030</b> 3m (9.8ft)				
			<b>S14</b> 14 W/m (2.5m max.) 4.3 W/ft (8.2ft max.)			<b>050</b> 5m (16.4ft)				
						<b>100</b> 10m (32.8ft)				
<b>63S0503VD</b>	<b>1</b>			<b>E</b>	<b>5</b>					

# FLEX 5x3 VERTICAL DOMED

## 0.2x0.12"


### ACCESSORIES

STATIC WHITE

**TYPE** Aluminum push in profile  
**MOUNTING** Surface mount

STATIC COLOR

ORDERING INFORMATION		
MODEL	FINISH	LENGTH
63S0503X	5PP Aluminum	0020 20mm (0.79")
		1000 1000mm (39.37")
		2000 2000mm (78.74")
63S0503X	5PP	

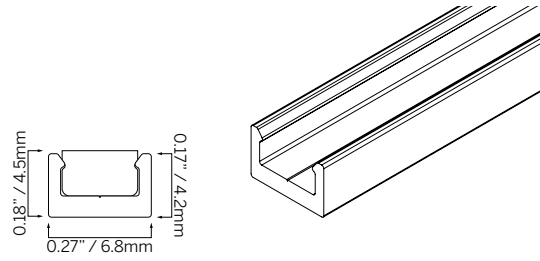

20



1000/2000



\*\*\* Profiles / clips are not compatible with 'A' adhesive backing version. \*\*\*

DRIVERS

IES FILES

ACCESSORIES