



FLEX 6x12 HORIZONTAL BLACK

0.24x0.47"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM



Horizontal Bending

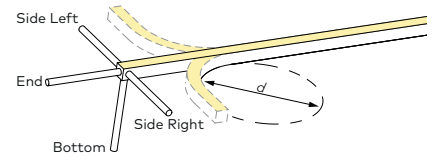

SPECIFICATION

MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS STATIC WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >2.4" / 60 mm)

- DRIVERS
- IES FILES

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft							
	1800K	2400K	2700K	3000K	3500K	4000K	6000K	
S05 50 mm (2")	6	8	9	9	9	10	10	
S10 50 mm (2")	12	15	16	17	18	18	18	
L05 50 mm (2")	6	8	9	9	9	10	10	
L10 50 mm (2")	12	15	16	17	18	18	18	

ACCESSORIES ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S0612H Flex 6x12 Horizontal	2 Black	C18 1800K	S05 5 W/m (10m max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	D010 EL96 DPH L3D0E DALI-DT6 UNV96-WL UNV384-WL
		C24 2400K	1.5 W/ft (32.8ft max.)					
		C27 2700K	S10 10 W/m (5m max.)					
		C30 3000K	3 W/ft (16.4ft max.)					
		C35 3500K	L05 5 W/m (16m max.)					
		C40 4000K	1.5 W/ft (52.5ft max.)					
C60 6000K	L10 10 W/m (8m max.) 3 W/ft (26.2ft max.)							
63S0612H	2							

STATIC WHITE - HIGH OUTPUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >2.4" / 60 mm)

- DRIVERS
- IES FILES

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft							
	1800K	2400K	2700K	3000K	3500K	4000K	6000K	
S10 62.5 mm (2.5")	18	23	24	27	27	27	28	


ACCESSORIES ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S0612HOH Flex 6x12 Horizontal High Output	2 Black	C18 1800K	S10 10 W/m (7m max.) 3 W/ft (23ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	D010 EL96 DPH L3D0E DALI-DT6 UNV96-WL UNV384-WL
		C24 2400K						
		C27 2700K						
		C30 3000K						
		C35 3500K						
		C40 4000K						
C60 6000K								
63S0612HOH	2							


FLEX 6x12 HORIZONTAL BLACK

0.24x0.47"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM



Horizontal Bending

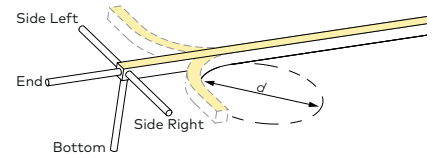

SPECIFICATION

MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS STATIC WHITE FREE CUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >2.4" / 60 mm)

- DRIVERS
- IES FILES

DRIVER OPTIONS (See driver page for details)	
D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

Cut Interval	DELIVERED LUMENS lm/ft							
	1800K	2400K	2700K	3000K	3500K	4000K	6000K	
SF05	Free Cut	5	7	8	9	9	9	
SF10	Free Cut	18	23	24	27	27	28	

- ACCESSORIES


ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S0612H Flex 6x12 Horizontal	2 Black	C18 1800K	SF05 5 W/m (11m max.) 1.5 W/ft (36.1ft max.)	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft) 010 1m (3.3ft) 030 3m (9.8ft) 050 5m (16.4ft) 100 10m (32.8ft)	.XXXX Length in inches	D010 EL96 DPH L3D0E DALI-DT6 UNV96-WL UNV384-WL
		C24 2400K						
		C27 2700K						
		C30 3000K						
		C35 3500K						
		C40 4000K						
C60 6000K								
63S0612H	2							


FLEX 6x12 HORIZONTAL BLACK

0.24x0.47"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM



Horizontal Bending

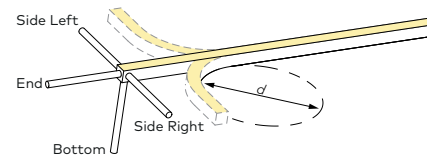

SPECIFICATION

MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS TUNABLE WHITE (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >3.9" / 100 mm)

DRIVER OPTIONS (See driver page for details)

DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
DALI-DT8 = eldoLED DALI (DT8), 0.1% dimming, 120-277V

	Cut Interval	DELIVERED LUMENS lm/ft						
		1800K	2400K	2700K	3000K	3500K	4000K	6000K
CT08	50 mm (2")	7	10	11	12	12	12	12


ACCESSORIES ORDERING INFORMATION

MODEL	JACKET	CCT (LOW)	CCT (HIGH)	LED TYPE*	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH	DRIVERS
63S0612H Flex 6x12 Horizontal	2 Black	C18 1800K	24 2400K	CT08 2x8 W/m (5m max.) 2x2.4 W/ft (16.4ft max.) <small>* Rated wattage is maximum wattage per channel. Combined power must also not exceed this value.</small>	E End B Bottom SL Side Left SR Side Right	7 IP67 2 IP20	003 0.3m (1ft)	.XXXX Length in inches	DALI-DT6 DALI-DT8
		C24 2400K	27 2700K				010 1m (3.3ft)		
		C27 2700K	30 3000K				030 3m (9.8ft)		
		C30 3000K	35 3500K				050 5m (16.4ft)		
		C35 3500K	40 4000K				100 10m (32.8ft)		
		C40 4000K	60 6000K						
63S0612H	2			CT08					


FLEX 6x12 HORIZONTAL BLACK

0.24x0.47"

- STATIC WHITE
- FREE CUT
- TUNABLE WHITE
- WARM DIM



Horizontal Bending

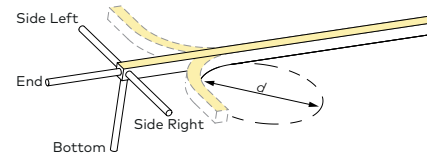

SPECIFICATION	
MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP67, IP20
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS WARM DIM (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >3.9" / 100 mm)

DRIVER OPTIONS (See driver page for details)	
IES FILES	MAGSDM96-WD = 0-10V / Phase Dim 96W, 0.1% CCR Dimming for Warm Dim, 120-277V (Phase - 120V only)

	Cut Interval	DELIVERED LUMENS lm/ft	
		2700K	3000K
12R	50 mm (2")	12	13

ACCESSORIES ORDERING INFORMATION										
MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	LENGTH			DRIVERS
63S0612H Flex 6x12 Horizontal	2 Black	C2718W 2700-1800K C3018W 3000-1800K	12R 12 W/m (5m max.) 3.7 W/ft (16.4ft max.)	E End	7 IP67	003 0.3m (1ft)	.XXXX Length in inches			MAGSDM96-WD
				B Bottom	2 IP20	010 1m (3.3ft)				
				SL Side Left		030 3m (9.8ft)				
				SR Side Right		050 5m (16.4ft)				
						100 10m (32.8ft)				
63S0612H	2		12R						MAGSDM96-WD	

FLEX 6x12 HORIZONTAL BLACK

0.24x0.47"

ACCESSORIES

STATIC WHITE


TYPE Aluminium profile
MOUNTING Surface mount

FREE CUT

ORDERING INFORMATION			
MODEL	FINISH	LENGTH	
63S0612H	5AP Silver	0020	20mm (0.79")
	2AP Black	1000	1000mm (39.37")
63S0612H			

TUNABLE WHITE

WARM DIM




DRIVERS

IES FILES

ACCESSORIES

20

1000

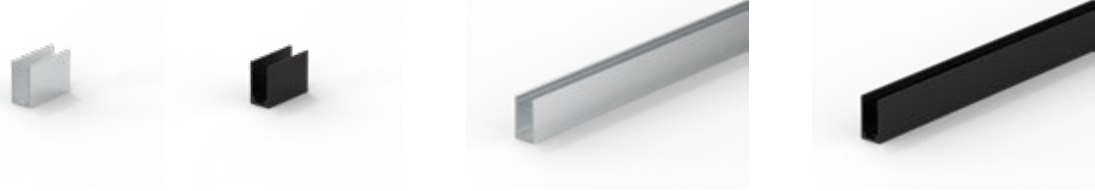

TYPE Stainless Mounting Clip
MOUNTING Surface mount

ORDERING INFORMATION			
MODEL	FINISH	LENGTH	
63S0612H	5SC Silver	0020	20mm (0.79")
	2SC Black		
63S0612H		0020	




TYPE Stainless Bendable Profile
MOUNTING Surface mount

ORDERING INFORMATION			
MODEL	FINISH	LENGTH	
63S0612H	5SC Silver	1000	1000mm (39.37")
	2SC Black		
63S0612H		1000	

TYPE Stainless Mounting Clip
MOUNTING Surface mount

ORDERING INFORMATION		
MODEL	FINISH	LENGTH
63S1010X	5SC Silver	0030 30mm (1.18")
	2SC Black	
63S1010X		

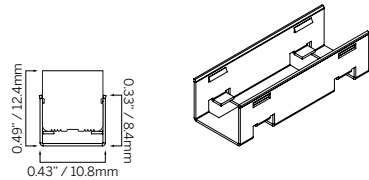

TYPE Stainless Bendable Profile
MOUNTING Surface mount

ORDERING INFORMATION		
MODEL	FINISH	LENGTH
63S1010X	5SC Silver	1000 1000mm (39.37")
	2SC Black	
63S1010X		

