
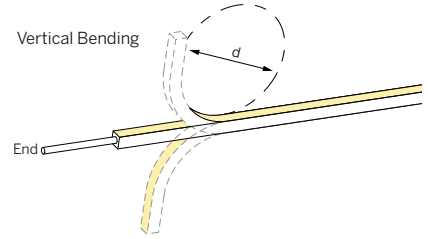



FLEX 8x5 VERTICAL DOMED

0.31x0.22"

STATIC WHITE

STATIC COLOR

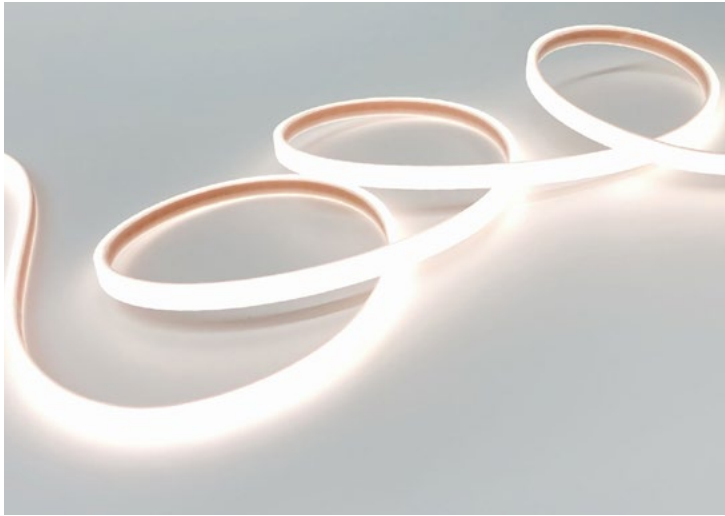

SPECIFICATION

MATERIAL	Silicone
MOUNTING	Surface
IP RATING	IP65
BINNING	3 Step
LIFETIME (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
DRIVER REQUIREMENT	24VDC Constant voltage
PROTECTION	UV, flame, salt and chlorine resistant
WARRANTY	5 Years

DRIVERS

STATIC WHITE FREE CUT (CRI >90 Ra)

SPECIFICATION (MINIMUM BEND DIAMETER >1.18" / 30 mm)

IES FILES

DRIVER OPTIONS (See driver page for details)

D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

	Cut Interval	DELIVERED LUMENS lm/ft						
		1800K	2400K	2700K	3000K	3500K	4000K	6000K
SF05	Free Cut	109	142	155	167	170	176	173
SF10	Free Cut	216	283	310	333	339	349	344
SF15	Free Cut	285	373	408	439	447	461	454

ACCESSORIES

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	ADHESIVE BACKING	LENGTH	DRIVERS
63S0805VD Flex 8x5 Vertical Domed	1 White	C18 1800K	SF05 5 W/m (10m max.)	E End	5 IP65	003 0.3m (1ft)	A 3M Backing (Optional)*	.XXXX Length in inches	D010 EL96 DPH L3D0E DALI-DT6 UNV96-WL UNV384-WL
		C24 2400K	1.5 W/ft (32.8ft max.)			010 1m (3.3ft)			
		C27 2700K	SF10 10 W/m (7m max.)			030 3m (9.8ft)			
		C30 3000K	3 W/ft (23ft max.)			050 5m (16.4ft)			
		C35 3500K	SF15 15 W/m (5m max.)			100 10m (32.8ft)			
		C40 4000K	4.6 W/ft (16.4ft max.)						
C60 6000K									
63S0805VD	1			E	5				

STATIC COLOR

SPECIFICATION (MINIMUM BEND DIAMETER >1.18" / 30 mm)

DRIVER OPTIONS (See driver page for details)

D010 = eldoLED, 10%, 0-10V dimming, 120-277V	DALI-DT6 = eldoLED DALI (DT6), 0.1% dimming, 120-277V
EL96 = eldoLED 24V, 0.1% 0-10V dimming, 120-277V	UNV96-WL = 0-10V / Phase Dim 96W Wet Location, 1% dimming, 120-277V
DPH = Phase Dimming, 1% dimming, 120V only	
L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	UNV384-WL = 0-10V / Phase Dim 384W Wet Location, 1% dimming, 120-277V

	Cut Interval	DELIVERED LUMENS lm/ft		
		RED	GREEN	BLUE
S05	50 mm (1.96")	57	167	39
S09	50 mm (1.96")	101	301	71
S12	50 mm (1.96")	135	401	94
S14	50 mm (1.96")	157	467	110

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	IP RATING	CABLE LENGTH	ADHESIVE BACKING	LENGTH	DRIVERS
63S0805VD Flex 8x5 Vertical Domed	1 White	RED Red	S05 5 W/m (5m max.)	E End	5 IP65	003 0.3m (1ft)	A 3M Backing (Optional)*	.XXXX Length in inches	D010 EL96 DPH L3D0E DALI-DT6 UNV96-WL UNV384-WL
		GREEN Green	1.5 W/ft (16.4ft max.)			010 1m (3.3ft)			
		BLUE Blue	S09 9 W/m (3m max.)			030 3m (9.8ft)			
			2.7 W/ft (9.8ft max.)			050 5m (16.4ft)			
			S12 12 W/m (3m max.)			100 10m (32.8ft)			
			3.7 W/ft (9.8ft max.)						
	S14 14 W/m (2.5m max.)								
	4.3 W/ft (8.2ft max.)								
63S0805VD	1			E	5				

FLEX 8x5 VERTICAL DOMED

0.31x0.22"


ACCESSORIES

STATIC WHITE

TYPE Aluminum push in profile
MOUNTING Surface mount

STATIC COLOR

ORDERING INFORMATION		
MODEL	FINISH	LENGTH
63S0805X	5PP Aluminum	0020 20mm (0.79")
		1000 1000mm (39.37")
		2000 2000mm (78.74")
63S0805X	5PP	

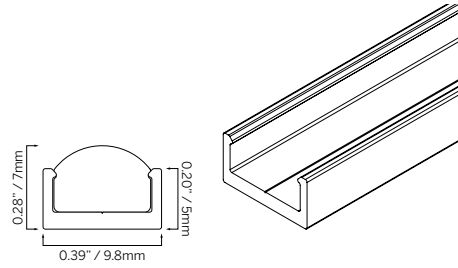

20

1000/2000



*** Profiles / clips are not compatible with 'A' adhesive backing version. ***

DRIVERS

IES FILES

ACCESSORIES