

Flexible Lighting Hospitality Box

1. Flex 15x15 Multi (0.6x0.6") - Static White High Temp

Multi Bend : White : 2400K CRI >90 : 4W/m (1.2W/ft) : Bottom : IP67 : 78 lm/ft
[5m / 16.4ft max. reel length, 11.8" min. bending diameter, 2" length increment]
PART NUMBER -- 63HTS1515M.1-C24-S04-B-7-CABLE LENGTH-12" (305mm)

2. Flex 5x10 Horizontal (0.2x0.39") - Static White

Horizontal Bend : White : 1800K CRI >90 : 5W/m (1.5W/ft) : End : IP67 : 29 lm/ft
[8m / 26.2ft max. reel length, 1.18" min. bending diameter, 2" length increment]
PART NUMBER -- 63S0510H.1-C18-S05-E-7-CABLE LENGTH-12" (305mm)

3. Flex 5x10 Horizontal (0.2x0.39") - Warm Dim

Horizontal Bend : White : 2700K-1800K WD CRI >90 : 10W/m (3W/ft) : End : IP67 : 60 lm/ft
[5m / 16.4ft max. reel length, 1.18" min. bending diameter, 2" length increment]
PART NUMBER -- 63S0510H.1-C2718W-S10-E-7-CABLE LENGTH-12" (305mm)

4. Flex 5x5 Vertical Domed (0.2x0.22") - Static White Free Cut

Vertical Domed : White : 2400K CRI >90 : 4 W/m (1.2 W/ft) : Bottom : IP65 : 132 lm/ft
[7m / 23ft max. reel length, 1.18" min. bending diameter, free cut]
PART NUMBER -- 63S0505VD.1-C24-SF04-B-5-CABLE LENGTH-11.8" (300mm)

5. Flex 8x5 Vertical Domed (0.31x0.22") - Static White Free Cut


Vertical Domed : White : 2700K CRI >90 : 5W/m (1.5W/ft) : End : IP65 : 155 lm/ft
[10m / 32.8ft max. reel length, 1.18" min. bending diameter, free cut]
PART NUMBER -- 63S0805VD.1-C27-SF05-E-5-CABLE LENGTH-11.8" (300mm)

6. Flex 16 Cove (0.63x0.63") - Warm Dim

Cove : White : 2700K-1800K WD CRI >90 : 14W/m (4.3W/ft) : Bottom Right : IP67 : 195 lm/ft
[5m / 16.4ft max. reel length, 9.8" min. bending diameter, 3.3" length increment]
PART NUMBER -- 63S16C.1-C3018W-14R-BR-7-CABLE LENGTH-10" (255mm)

7. Flex 10x10 Multi Honeycomb (0.39x0.39") - Static White

Multi Bend : Black : 2700K CRI >90 : 10W/m (3W/ft) : Bottom : IP67 : 28 lm/ft
[4m / 13.1ft max. reel length, 7.9" min. bend diameter, 2.2" length increment]
PART NUMBER -- 63S1010HCM.2-C27-S10-B-7-CABLE LENGTH-11.1" (283mm)

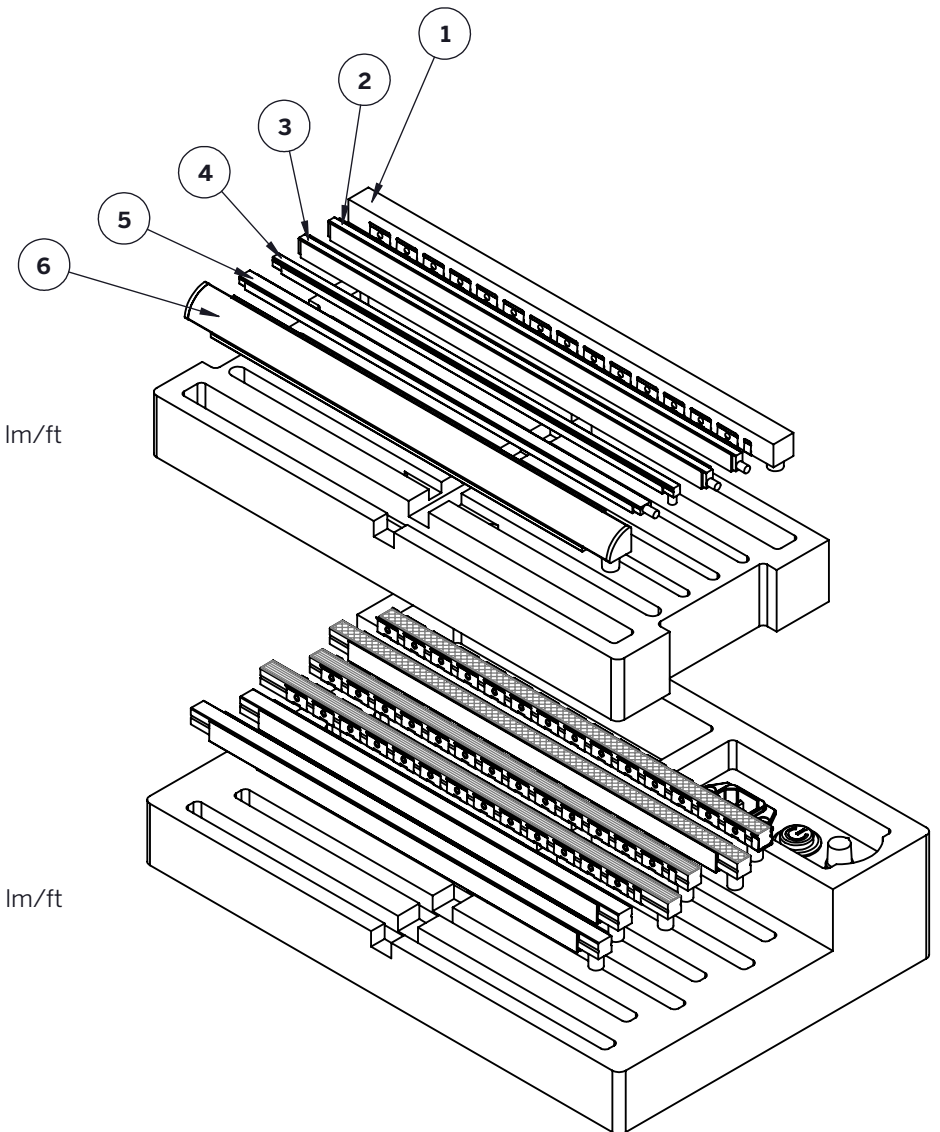

Flexible Lighting Hospitality Box

inter•lux

8. Flex 10x10 Vertical Honeycomb (0.39x0.39") - Warm Dim

Vertical Bend : Black : 2700K-1800K WD CRI >90 : 10W/m (3W/ft) : Bottom : IP67 : 18 lm/ft
[5m / 16.4ft max. reel length, 3.9" min. bending diameter, 2" length increment]
PART NUMBER -- 63S1010HCV.2-C2718W-10R-B-7-CABLE LENGTH-12" (305mm)

9. Flex 10x10 Multi Dark Line (0.39x0.39") - Static White

Multi Bend : Black : 2400K CRI >90 : 10W/m (3W/ft) : Bottom : IP67 : 74 lm/ft
[4m / 13.1ft max reel length, 7.9" min. bend diameter, 2.2" length increment]
PART NUMBER -- 63S1010DLM.2-C24-S10-B-7-CABLE LENGTH-11.1" (283mm)

10. Flex 10x10 Vertical Dark Line (0.39x0.39") - Warm Dim

Vertical Bend : Black : 3000K-1800K WD CRI >90 : 10W/m (3W/ft) : Bottom : IP67 : 57 lm/ft
[5m / 16.4ft max. reel length, 3.9" min. bending diameter, 2" length increment]
PART NUMBER -- 63S1010DLV.2-C3018W-10R-B-7-CABLE LENGTH-12" (305mm)

11. Flex 10x10 Multi (0.39x0.39") - Static White

Multi Bend : White : 1800K CRI >90 : 10W/m (3W/ft) : Bottom : IP67 : 160 lm/ft
[4m / 13.1ft max reel length, 7.9" min. bend diameter, 2.2" length increment]
PART NUMBER -- 63S1010M.1-C18-S10-B-7-CABLE LENGTH-11.1" (283mm)

12. Flex 10x10 Horizontal (0.39x0.39") - Warm Dim

Horizontal Bend : White : 3000K-1800K WD CRI >90 : 10W/m (3W/ft) : Bottom : IP67 : 135 lm/ft
[5m / 16.4ft max. reel length, 3.9" min. bending diameter, 2" length increment]
PART NUMBER -- 63S1010H.1-C3018W-10R-B-7-CABLE LENGTH-12" (305mm)

