


3" ProTools Downlight Square Recessed



Recessed Cone (SRC) / Bezel Trim (RBT)




Square Regressed Diffuser (SRD) / Bezel Trim (RBT)

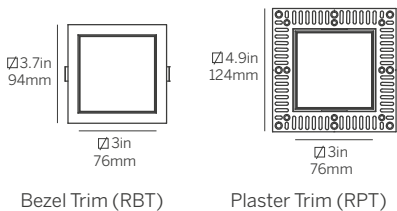


Bezel Trim (RBT)

Plaster Trim (RPT)

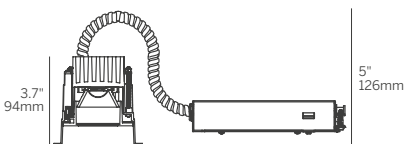

Minimum of 5" (126mm) ceiling void is required to install the integral driver from below the ceiling.



Multiple luminaire configurations for plaster trim. See Multiple Luminaire specsheet for details.

Ordering Information												
Model	Fixation	Power ^{1,2}	CRI	CCT ²	Driver ³	Cover	Lens	Beam	Trim Finish	Cover Finish	Housing ⁴	Options
WG-75SPTDL												
WG-75SPTDL	RBT RPT	L M H TW WD	92 98 92 95	27 30 35 40 TW WD	S010 D010 SPH PEQ0 D2S RS010 RD010 RD2S RD2T X	SRC SRPH SFPH SRD	OA RSC MPO	20 30 50 100	W B S	W B S	LP NC IC CP X	WL WC MLC EM AWNRF

Luminaire

- Part of a complete family of 3" aperture matching downlights.
- 3" round aperture recessed downlight available with multiple regressed or flush cover options.
- Efficacy up to 92 lumens per watt (delivered).
- CREE 2-step MacAdam LEDs.
- CRI 92+ standard, 98+ optional.
- L70 (TM21 Projected 85°C) Static White 55,400 hours. Warm Dim + Tunable White 55,000 hours.
- ETL and ETL-C for dry and damp locations, Wet location optional.
- Luminaire installed and maintained from below the ceiling. Maximum ceiling thickness 1.2".
- Housings available (see housings page).
- Multiple luminaire configurations for plaster trim (see detail page).
- 5-year warranty.

Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

Power^{1,2}

- L = Low Power, 5.7W @ 350mA
- M = Mid Power, 8.4W @ 500mA
- H = High Power, 12W @ 700mA
- TW = 9W @ 500mA
- WD = 11.8W @ 350mA

CRI

- 92 = 92 CRI (Static White, TW only)
- 98 = 98 CRI (Static White)
- 95 = 95 CRI (WD only)

CCT²

- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K
- TW = Tunable White 1800 - 4000K
- WD = Warm Dimming 1800 - 3000K

Integral Driver³

- S010 = eldoLED 0-10V 1% dimming, 120-277V (22W)
- D010 = eldoLED 0-10V 0.1% dimming, 120-277V (22W)
- SPH = Phase (2-wire) 3% dimming, 120V only (20W)
- PEQ0 = Lutron Hi-Lume Premier 0.1% EcoSystem dimming, 120-277V (20W)
- D2S = DALI-2 for Static White 0.1% dimming, 120-277V (22W)

Remote Driver³

- RS010 = Remote eldoLED 0-10V 1% dimming, 120-277V (22W, 50W or 100W)
- RD010 = Remote eldoLED 0-10V 0.1% dimming, 120-277V (22W, 50W or 100W)
- RD2S = Remote DALI-2 for Static White 0.1% dimming, 120-277V (22W, 50W or 100W)
- RD2T = Remote DALI-2 (DT8) for Tunable White 0.1% dimming, 120-277V (30W)
- X = No driver

Cover

- SRC = Square Recessed Cone
- SRPH = Square Regressed Pinhole
- SFPH = Square Flush Pinhole
- SRD = Square Regressed Diffuser

Lens

- OA = Open Aperture
- RSC = Recessed Satin Clear Lens
- MPO = Micro Prismatic Opal Diffuser

Beam

- 20 = 20° Beam Angle
- 30 = 30° Beam Angle
- 50 = 50° Beam Angle
- 100 = 100° Beam Angle (SRD only)

Trim Finish

- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006

Cover Finish (N/A for SRD)

- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006

Housing (optional)⁴

- LP = Landing Pan
- NC = New Construction Housing
- IC = Insulated Ceiling Housing
- CP = Chicago Plenum Housing
- X = No Housing

Options

- WL = Wet Location (Only available with SRC-RSC or SRD-MPO)
- WC = Wood Ceiling Adapter (RPT only - specify ceiling thickness)
- MLC = Multiple Luminaire Configurations (RPT only - see detail page)
- EM = Emergency (remote only)
- AWNRf = Lutron Athena Wireless Node RF (RS010, RD010, RD2S, RD2T drivers only)

1. Wattage shown does not include power supplies/drivers.
 2. See photometric data sheet for delivered lumens.
 3. See driver information for details.
 4. See housings pages for details.