


20 Linear Multi - Suspended




Multi-suspended for general, accent and decorative lighting.

Housing	Precision extruded aluminum for true dimensions and tolerances Lengths from 24"-72" single luminaires Field adjustable suspensions cables All suspensions cables clear insulated Surface mounted canopy mounts over 4" junction box Finishes: white, black, silver and custom
Integration	Suspension from any surface
Distribution	Multiple lens options for diffuse, high efficiency and luminous effect
LED	Static White, 2700K - 4000K, 1.5 W - 6W/ft, constant current, >90 CRI, 3-Step MacAdam L70 (TM21 Projected 85°C) Static White = 50,000 hours
Lens	OD - Opal Diffuser provides even, continuous line of light and general illumination MPL - Micro-prismatic lens provides lower brightness, general illumination
Driver	Remote driver Compatible with quality constant current drivers
Connectivity	Lutron Athena Wireless Node RF Casambi BlueTooth
Weight	Canopy weighs 10 pounds; provide adequate blocking Fixtures weigh 0.5lbs per foot
Operating Temp	Suitable for operation in maximum ambient temperature of 35C (95F)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry location, CE
Voltages	120-277VAC

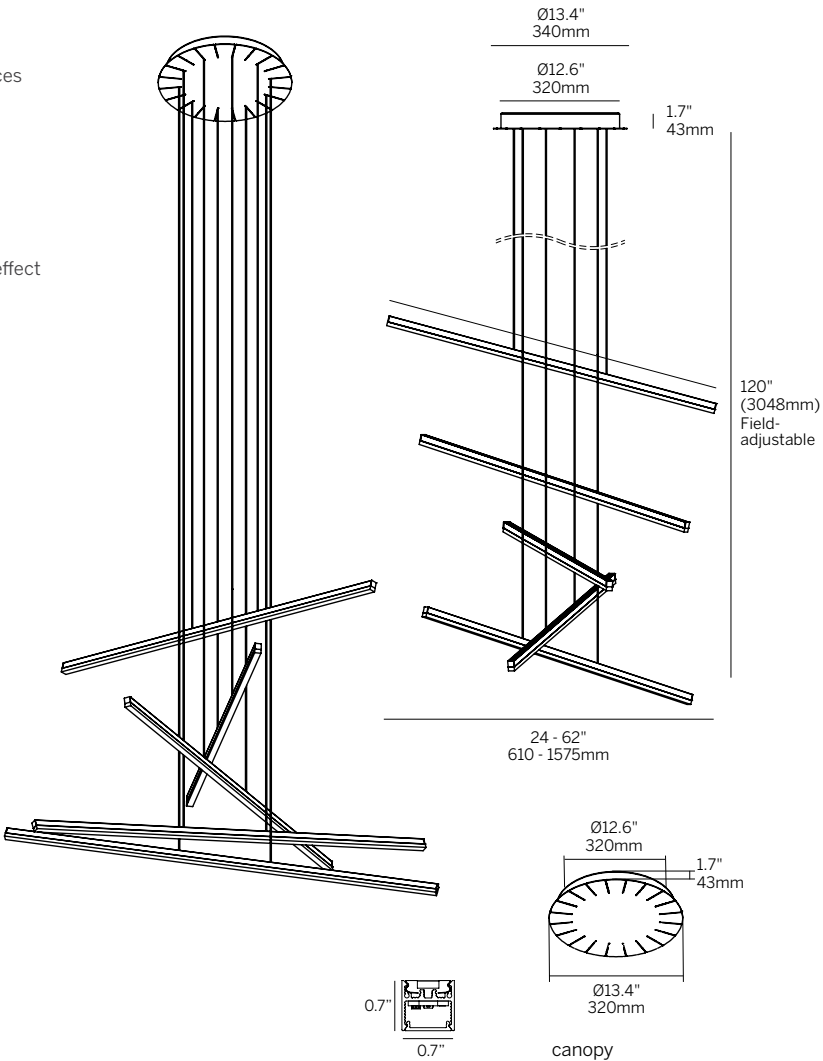

Lenses/Accessories



20 Linear Multi - Suspended

Model	Number of Fixtures	Fixation	Pattern	Length	Power ¹	CRI/CCT ²	Driver ³	Lens	Finish	Options
WG-20LDL-MS	3 5 7	S120 (std) SC	S	24 36 42 48 60	P0 P1 P2	927 930 935 940	E1 D2DT6	OD (std) MPL	W (std) B S F	AWNRF BT EM

Model

- WG-20LDL-MS = 20 Linear Multi - Suspended

Number of Fixtures

- 3 = 3 fixtures
- 5 = 5 fixtures
- 7 = 7 fixtures

Fixation (field adjustable inside the canopy for suspension legnth and angles)

- S120 = 120" suspension cable standard, field-cuttable (standard)
- SC = Custom suspension cable, specify inches to the nearest 0.25" (i.e. 72.25")

Pattern

- S = Straight run

Length

- 24 = 24"
- 36 = 36"
- 42 = 42"
- 48 = 48"
- 60 = 60"

Power¹

- P0 = 1.5 W/ft
- P1 = 3 W/ft
- P2 = 6 W/ft

CRI/CCT (90+ CRI)²

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

Driver (integral)³

- E1 = eldoLED 0.1% dimming, 0-10V (120-277V)
- D2DT6 = DALI-2 (DT6), 0.1% dimming (120-277V)

Lens

- OD = Satin opal diffuser (standard)
- MPL = Micro-prismatic lens

Finish

- W = White, 15% gloss, RAL 9010 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finished trim, specify RAL

Options

- AWNRF = Lutron Athena Wireless Node RF (specify with E1 or D2DT6)
- BT = Wireless CAS - Casambi (specify with E1 or D2DT6)
- EM = Emergency (remote)

Whitegoods reserves the right to change any information without prior notice.

Notes

- Wattage is shown for LED boards only, system wattage varies depending on driver selected. 7 fixtures Low power only.
- When specifying 20LDI please specify CRI / CCT and Driver for Direct and Indirect if different CRI / CCT / Driver is needed, i.e. 930-M-OD-D010-930-M-SD-D010. Refer to specsheet for delivered lumen data for all product configurations.
- Remote power supply required. See power supply page for details.