


20 Linear Wand



Standard Opal Diffuser for even illumination and no LED appearance. On / Off switch with 118" cable and plug, standard.

Housing	Precision extruded aluminum for true dimensions and tolerances Built to cabinet length specifications Finishes: white
Integration	Magnet mount
Distribution	Wide angle illumination
LED	Constant Voltage, 90+ CRI, 3 Steps MacAdam, 6W per foot L70 lifetime (TM21 Projected 85C) Static White (2700K-4000K) = 60,000 hours
Lens	OD - Opal Diffuser provides even, continuous line of light and general illumination MPL - Micro-prismatic lens provides lower brightness, general illumination NL16 - Narrow Lens optic provides narrow beam for wall grazing applications LL45 - 45 degree Louver in white or black provides extreme low brightness BD - Block Diffuser of satin acrylic provides general illumination and decorative effect
Driver	120VAC plug-in
Weight	0.5lbs per foot
Operating Temp	Suitable for operation in maximum ambient temperature of 35C (95F)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE
Voltages	120VAC

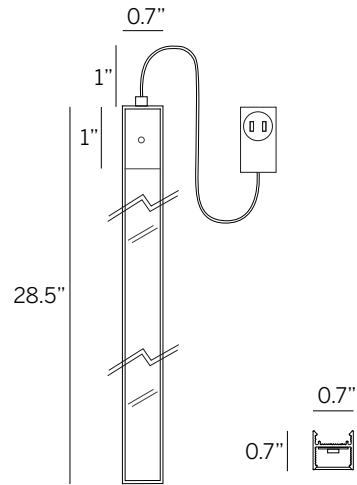

Total Length includes 1" for switch. 1" clearance required for cable.

20 Linear Wand

Model	Fixation	Pattern	Length	Power ¹	CRI/CCT ²	Driver ³	Lens	Finish
WG-WAND	MM	S	28.5	M	927 930 935 940	S	OD (std) MPL NL16 LL45B LL45W BDO BDC	W (std)

- Model**

 - WG-WAND = 20 Linear Wand

Fixation

 - MM = Magnetic mounting

Pattern

 - S = Straight run

Length

Total length includes 1" for switch, requires 1" clearance for cable

 - 28.5 = 28.5"

Power¹

 - M = 6W/ft mid power (24V)

CRI/CCT (90+ CRI)²

 - 927 = 2700K
 - 930 = 3000K
 - 935 = 3500K
 - 940 = 4000K

Driver (plug-in)³

 - S = Standard driver 120 - 240V, 50 - 60 Hz
- Lens**

 - OD = Satin opal diffuser (standard)
 - MPL = Micro-prismatic lens
 - NL16 = Linear narrow lens, 16°
 - LL45B = Linear louver black
 - LL45W = Linear louver white
 - BDO = Block Diffuser Opal
 - BDC = Block Diffuser Clear

Finish

 - W = White, 15% gloss, RAL 9010 (standard)

Lenses/Accessories

Opal Diffuser (OD)
Micro-prismatic Lens (MPL)

Narrow Lens (NL16)

Louver (LL45)

Block Diffuser (BD)

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- Wattage shown is for LED boards only, system wattage varies depending on driver selected.
 - Refer to specsheet for delivered lumen data for all product configurations.
 - 24V fixture supplied complete with individual socket mount power supply 120-240V, 50-60 Hz and feed cable.