


60 Linear Direct / Indirect Suspended




2.4" aperture suspended bi-directional linear downlight with flush lens providing high angle illumination compatible with all ceiling types. Indirect light provides voluminous illumination towards the ceiling plane.

Housing	Precision extruded aluminum for true dimensions and tolerances Snap-in flush lens for seamless integrated appearance Standard and tailored lengths including corners, in suspended configurations
	Finishes: white, black, silver and custom
Integration	Ceiling canopy mounts to any ceiling surface
Distribution	High angle illumination linear downlight
LED	Static White, 2700K - 4000K, 1.5 W - 15 W/ft, constant current, >90 CRI, 3-Step MacAdam Tunable White, 1800K - 4000K / 2700K - 6500K, 1.5 W - 15 W/ft, constant current, >90 CRI L70 (TM21 Projected 85°C) Static White / Tunable White = 50,000 hours RGBW, 3000K White, 7.6 W/ft, constant voltage L70 (TM21 Projected 85°C) RGBW = 50,000 hours
Optic	OD - Snap-in flush satin opal acrylic for even illumination DD - Snap-in 1" drop diffuser for wide distribution
Driver	Compatible with quality constant current drivers
Connectivity	Lutron Athena Wireless Node RF Casambi BlueTooth
Weight	4lbs per foot
Operating Temp	Suitable for operation in maximum ambient temperature of 35C (95F)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE
Voltages	120-277VAC


Lenses/Accessories

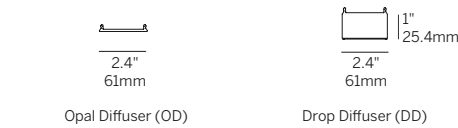

Suspended (60LDI)

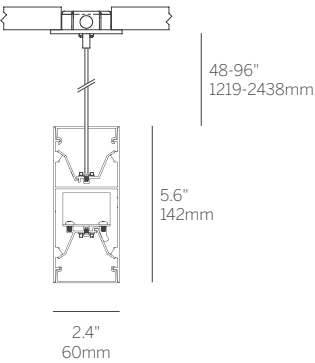

Suspended / Drop Diffuser (60LDI...DD)

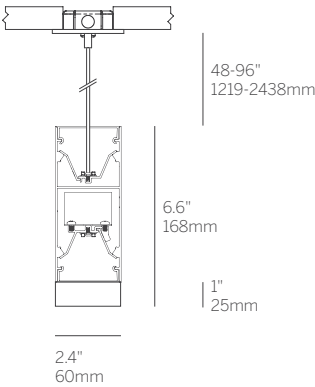

60 Linear Direct / Indirect Suspended

Model ¹	Fixation	Pattern	Length	Direct				Indirect				Finish	Options
				Power ³	CRI ⁴	Driver ⁵	Lens	Power ³	CRI ⁴	Driver ⁵	Lens		
WG-60LDI	S48 S96 SXX	S P ² PZ ²	A A x B A x B x C A x B x A x B	P1 P2 P3 P4 M	927 930 935 940 TW1840 TW2765 RGBW	E1 L1 D2DT6 D2DT8 DMX	OD (std) DD ⁶	P1 P2 P3 P4 M	927 930 935 940 TW1840 TW2765 RGBW	E1 L1 D2DT6 D2DT8 DMX	OD	W (std) B S F	AWNRF BT DC EM

Model¹

- WG-60LDI = 60 Linear Direct/Indirect

Fixation

- S48 = 48" suspension cable, field-cuttable (standard)
- S96 = 96" suspension cable, field-cuttable
- SXX = Specify suspension cable length

Pattern

- S = Straight run
- P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane²
- PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory²

Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25"). For pattens specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B).

Power³

- P1 = 3 W/ft
- P2 = 6 W/ft
- P3 = 10 W/ft
- P4 = 15 W/ft
- M = 7.6 W/ft (RGBW Only)

CRI/CCT (90+ CRI)⁴

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- TW1840 = Tunable white 1800K - 4000K
- TW2765 = Tunable white 2700K - 6500K
- RGBW = 3000K White

Driver (Integral)⁵

- E1 = eldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, Ecosystem (120-277V)
- D2DT6 = DALI-2 (DT6), 0.1% dimming (120-277V)
- D2DT8 = DALI-2 (DT8), 0.1% dimming (120-277V) [TW ONLY]
- DMX = eldoLED, 24V, DMX Dimming [RGBW ONLY] (Remote)

Lens


- OD = Satin opal diffuser (standard diffuse)
- DD = Drop diffuser (Direct ONLY)⁶

Finish

- W = White, 15% gloss, RAL 9010 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finished trim, specify RAL

Options

- AWNRF = Lutron Athena Wireless Node RF (specify with E1, D2DT6 or D2DT8)
- BT = Wireless CAS – Casambi (specify with E1, D2DT6 or D2DT8) (Remote)
- DC = Dual circuit
- EM = Emergency

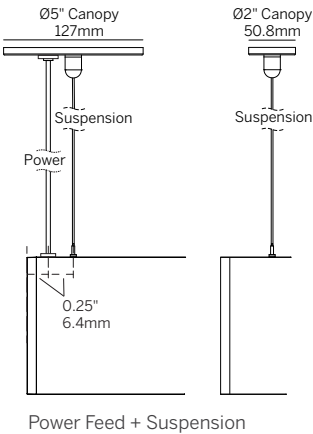

Whitegoods reserves the right to change any information without prior notice.

Notes

- To specify Direct or Indirect only, leave Power, CRI, Driver and Lens blank for direction without light.
- See pattern spec sheet.
- Wattage shown does not include power supplies/drivers.Maximum combined wattage if specifying Direct Power + Indirect Power is 21 W/ft (i.e. P4 Direct [1 W/ft] + P2 Indirect [6 W/ft]).
- See spec page for delivered lumens.
- See power supply page for details.
- Butt seam (lens) when in continuous run, straight runs only.

