



City Linear Frame Horizontal Suspended

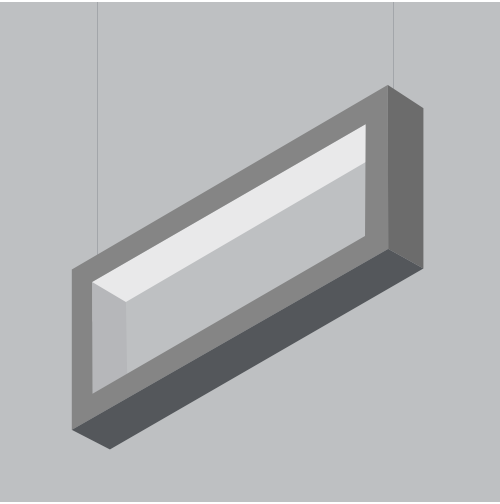


Suspended, rectangular luminaire horizontally oriented with inward facing opal lens.


Housing	Precision extruded aluminum for true dimensions and tolerances Snap-in flush lens for even illumination Standard and tailored lengths Finishes: white, black, silver and custom
Integration	Ceiling canopy mounts to any ceiling surface
Distribution	Indirect lighting
LED	Constant Voltage, 90+ CRI, 3 Steps MacAdam, 3W - 10W per foot L70 lifetime (TM21 Projected 85C) Static White (2700K-4000K) = 60,000 hours
Optic	OD - Satin Opal Diffuser
Driver	Compatible with quality constant voltage drivers
Weight	1.5lbs per foot
Operating Temp	Suitable for operation in maximum ambient temperature of 35C (95F)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE
Voltages	120-277VAC

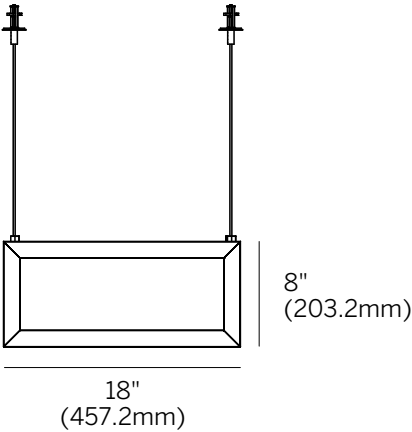

front view

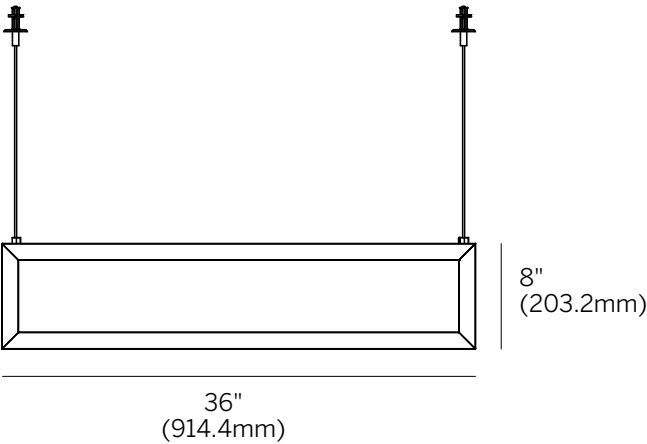

front view



bottom view

City Linear Frame Horizontal Suspended

Model	Fixation	Canopy	Size	Power ¹	CRI/CCT ²	Driver ³	Lens	Finish	Options
WG-CL-FRH	S48 S96 SXX	C2 C5	8x18 8x36	L M H	927 930 935 940	X S D010 DPH L3DAE L3DOE EL96	OD	W B S F	EM

Model

- WG-CL-FRH = City Linear Frame Horizontal

Fixation

- S48 = 48" suspension cable, field-cutable (standard)
- S96 = 96" suspension cable, field-cutable
- SXX = Specify suspension cable length

Canopy

- C2 = 1.8" dia. surface mount
- C5 = 5" dia. for 4" j-box

Length

- 8x18 = 8" x 18"
- 8x36 = 8" x 36"

Power¹

- L = 3 W/ft low power (24V)
- M = 6 W/ft mid power (24V)
- H = 10 W/ft high power (24V)

CRI/CCT (90+ CRI)²

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

Driver (Remote)³

- X = No driver, ordered separately
- S = Standard, non-dim driver 120-277V
- D010 = eldoLED, 10%, 0-10V dimming, 120-277V
- DPH = Phase Dimming, 1% dimming, 120V only
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- EL96 = eldoLED, 24V, 0.1% 0-10V Dimming LED, 120-277V

Lens

- OD = Satin opal diffuser (standard)

Finish


- W = White, 15% gloss, RAL 9003
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finish, specify RAL code

Options


- EM = Emergency (remote)

Canopy

C2



C5



Notes

- Wattage shown does not include power supplies/drivers.
- See photometric data sheet for delivered lumens.
- See power supply page for details.