

City Linear Frame

Suspended




Contents	
1	overview
2	specifications / configurator




Suspended fixture with indirect lighting for indoor use.

- Suspended fixture with indirect lighting for indoor use.
- Extruded aluminum housing, easily installed internal LED tray assembly. Remote driver. Field replaceable LED boards.
- Satin opal diffuser for high efficiency and soft edge beam without striations.
- Efficacy up to 92 lumens per watt (delivered).
- 90+ CRI, 3 Step MacAdam.
- L70 (TM21 Projected 85°C) Static White 60,000 hours.
- ETL and ETL-C for dry and damp locations.
- Powdercoat painted.



8"
(203.2mm)


bottom view

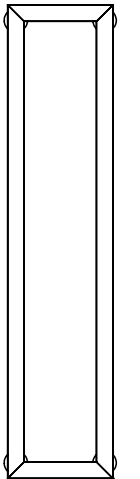

8"
(203.2mm)

bottom view

36"
(914.4mm)




front view

2"
(50.8mm)

Canopy

C2



1.1"
(27mm)

Ø1.8"
(45mm)

C5



0.3"
(6.8mm)

Ø5"
(127mm)

City Linear Frame

Suspended

inter•lux

Ordering Information

WG-CL-FR							OD		
Model	Fixation	Canopy	Size	Power ¹	CRI/CCT ²	Driver ³	Lens	Finish	Options
WG-CL-FR	S48 S96 SXX	C2 C5	8x18 8x36	L M H	927 930 935 940	X S D010 DPH L3DAE L3D0E EL96	OD	W B S F	EM

Model

- WG-CL-FR = City Linear Frame

Fixation

- S48 = 48" suspension cable, field-cuttable (standard)
- S96 = 96" suspension cable, field-cuttable
- SXX = Specify suspension cable length

Canopy

- C2 = 1.8" dia. surface mount
- C5 = 5" dia. for 4" j-box

Size

- 8x18 = 8" x 18"
- 8x36 = 8" x 36"

Power¹

- L = 3 W/ft low power (24V)
- M = 6 W/ft mid power (24V)
- H = 10 W/ft high power (24V)

CRI/CCT (90+ CRI)²

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

Driver (Remote)³

- X = No driver, ordered separately
- S = Standard, non-dim driver 120-277V
- D010 = eldoLED, 10%, 0-10V dimming, 120-277V
- DPH = Phase Dimming, 1% dimming, 120V only
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- EL96 = eldoLED, 24V, 0.1% 0-10V Dimming LED, 120-277V

Lens

- OD = Satin opal diffuser (standard)

Finish

- W = White, 15% gloss, RAL 9003
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finish, specify RAL code

Options

- EM = Emergency (remote)

1 Wattage shown does not include power supplies/drivers.

2 See photometric data sheet for delivered lumens.

3 See power supply page for details.