


City Linear Frame Vertical

Suspended




Contents	
1	overview
2	specifications / configurator

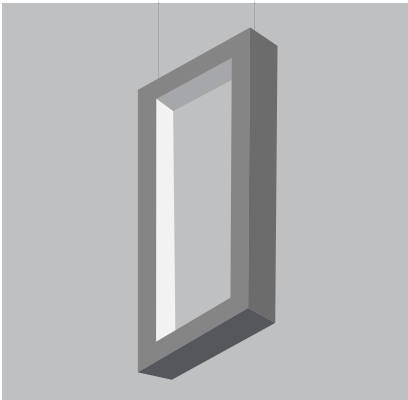


Suspended vertical fixture with indirect lighting for indoor use.

- Suspended vertical fixture with indirect lighting for indoor use.
- Extruded aluminum housing, easily installed internal LED tray assembly. Remote driver. Field replaceable LED boards.
- Satin opal diffuser for high efficiency and soft edge beam without striations.
- Efficacy up to 92 lumens per watt (delivered).
- 90+ CRI, 3 Step MacAdam.
- L70 (TM21 Projected 85°C) Static White 60,000 hours.
- ETL and ETL-C for dry and damp locations.
- Powdercoat painted.

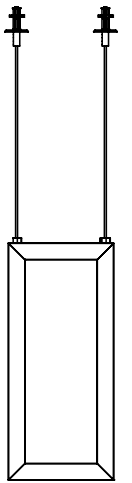


8"
(203.2mm)

front view

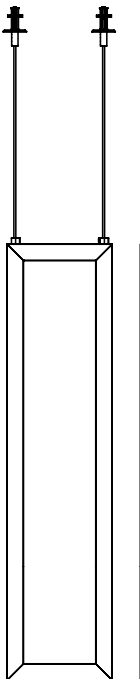



8"
(203.2mm)

front view



bottom view

Canopy



City Linear Frame Vertical

Suspended

inter•lux

Ordering Information

WG-CL-FRV							OD		
Model	Fixation	Canopy	Size	Power ¹	CRI/CCT ²	Driver ³	Lens	Finish	Options
WG-CL-FRV	S48 S96 SXX	C2 C5	18x8 36x8	L M H	927 930 935 940	X S D010 DPH L3DAE L3D0E EL96	OD	W B S F	EM

Model

- WG-CL-FRV = City Linear Frame Vertical

Fixation

- S48 = 48" suspension cable, field-cuttable (standard)
- S96 = 96" suspension cable, field-cuttable
- SXX = Specify suspension cable length

Canopy

- C2 = 1.8" dia. surface mount
- C5 = 5" dia. for 4" j-box

Length

- 18x8 = 18" x 8"
- 36x8 = 36" x 8"

Power¹

- L = 3 W/ft low power (24V)
- M = 6 W/ft mid power (24V)
- H = 10 W/ft high power (24V)

CRI/CCT (90+ CRI)²

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

Driver (Remote)³

- X = No driver, ordered separately
- S = Standard, non-dim driver 120-277V
- D010 = eldoLED, 10%, 0-10V dimming, 120-277V
- DPH = Phase Dimming, 1% dimming, 120V only
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- EL96 = eldoLED, 24V, 0.1% 0-10V Dimming LED, 120-277V

Lens

- OD = Satin opal diffuser (standard)

Finish

- W = White, 15% gloss, RAL 9003
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finish, specify RAL code

Options

- EM = Emergency (remote)

1 Wattage shown does not include power supplies/drivers.

2 See photometric data sheet for delivered lumens.

3 See power supply page for details.