



City Linear Frame Vertical Suspended

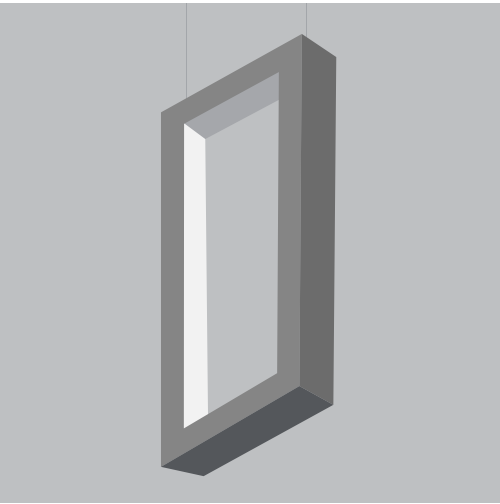

Suspended, rectangular luminaire vertically oriented with inward facing opal lens.

Housing	Precision extruded aluminum for true dimensions and tolerances Snap-in flush lens for even illumination Standard and tailored lengths Finishes: white, black, silver and custom
Integration	Ceiling canopy mounts to any ceiling surface
Distribution	Indirect lighting
LED	Constant Voltage, 90+ CRI, 3 Steps MacAdam, 3W - 10W per foot L70 lifetime (TM21 Projected 85C) Static White (2700K-4000K) = 60,000 hours
Optic	OD - Satin Opal Diffuser
Driver	Compatible with quality constant voltage drivers
Weight	1.5lbs per foot
Operating Temp	Suitable for operation in maximum ambient temperature of 35C (95F)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE
Voltages	120-277VAC

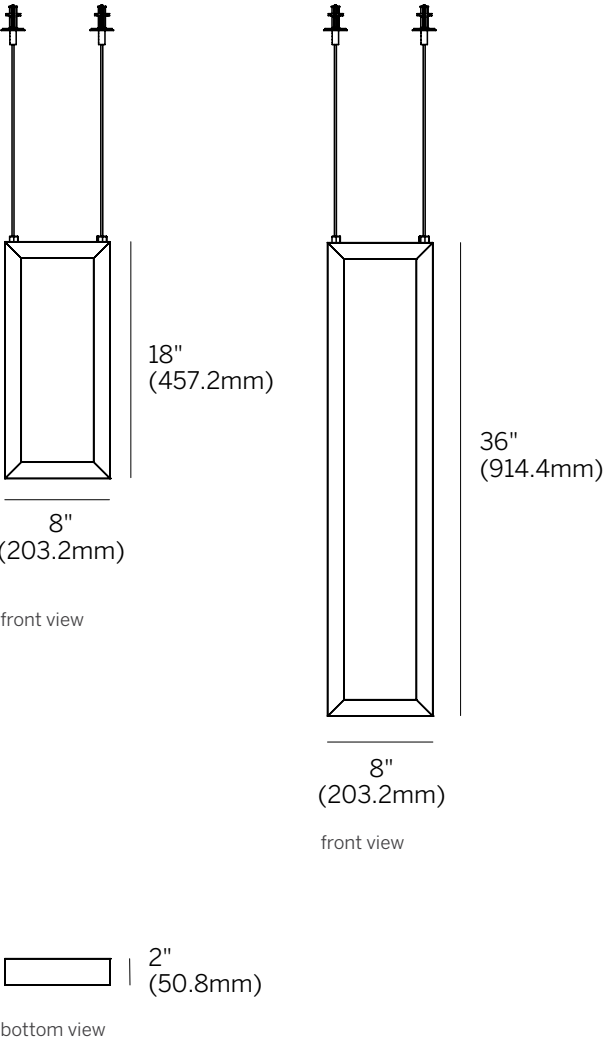

City Linear Frame Vertical Suspended

Model	Fixation	Canopy	Size	Power ¹	CRI/ CCT ²	Driver ³	Lens	Finish	Options
WG-CL-FRV	S48 S96 SXX	C2 C5	18x8 368	L M H	927 930 935 940	X S D010 DPH L3DAE L3D0E EL96	OD	W B S F	EM

- Model**

 - WG-CL-FRV = City Linear Frame Vertical

Fixation

 - S48 = 48" suspension cable, field-cuttable (standard)
 - S96 = 96" suspension cable, field-cuttable
 - SXX = Specify suspension cable length

Canopy

 - C2 = 1.8" dia. surface mount
 - C5 = 5" dia. for 4" j-box

Size

 - 18x8 = 18" x 8"
 - 36x8 = 36" x 8"

Power¹

 - L = 3 W/ft low power (24V)
 - M = 6 W/ft mid power (24V)
 - H = 10 W/ft high power (24V)

CRI/CCT (90+ CRI)²

 - 927 = 2700K
 - 930 = 3000K
 - 935 = 3500K
 - 940 = 4000K
- Driver (Remote)³**

 - X = No driver, ordered separately
 - S = Standard, non-dim driver 120-277V
 - D010 = eldoLED, 10%, 0-10V dimming, 120-277V
 - DPH = Phase Dimming, 1% dimming, 120V only
 - L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
 - L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - EL96 = eldoLED, 24V, 0.1% 0-10V Dimming LED, 120-277V

Lens


 - OD = Satin opal diffuser (standard)

Finish

 - W = White, 15% gloss, RAL 9003
 - B = Black, 15% gloss, RAL 9005
 - S = Silver, 15% gloss, RAL 9006
 - F = Custom finish, specify RAL code

Options

 - EM = Emergency (remote)

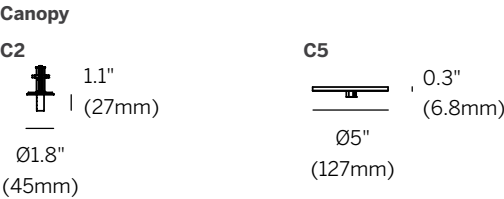

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- Wattage shown does not include power supplies/drivers.
 - See photometric data sheet for delivered lumens.
 - See power supply page for details.

