



City Linear Indoor



Surface wall or ceiling mounted fixture with indirect lighting for indoor use.

Housing	Precision extruded aluminum for true dimensions and tolerances Snap-in flush lens for even illumination Standard and tailored lengths Finishes: white, black, silver and custom
Integration	Surface wall or ceiling mounted
Distribution	Indirect lighting
LED	Constant Voltage, 90+ CRI, 3 Steps MacAdam, 3W - 10W per foot L70 lifetime (TM21 Projected 85C) Static White (2700K-4000K) = 60,000 hours
Optic	OD - Satin Opal Diffuser
Driver	Compatible with quality constant voltage drivers
Weight	1.5lbs per foot
Operating Temp	Suitable for operation in maximum ambient temperature of 35C (95F)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE
Voltages	120-277VAC

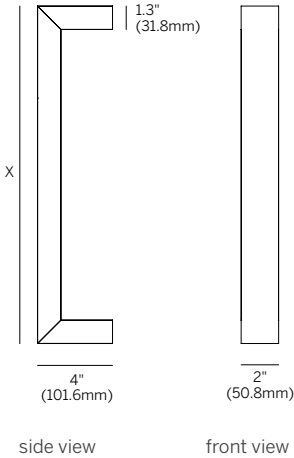

City Linear Indoor

Model	Fixation	Length	Power ¹	CRI/CCT ²	Driver ³	Lens	Finish	Options
WG-CL	SW	24 36 48 60 XX	L M H	927 930 935 940	X S D010 DPH L3DAE L3DOE EL96	OD	W B S F	MP EM

Model

- WG-CL = City Linear

Fixation

- SW = Surface wall or ceiling

Length

- 24 = 24"
- 36 = 36"
- 48 = 48"
- 60 = 60"
- XX = Specify inches to the nearest 0.25 (i.e. 72.25") (max length 96")

Power¹

- L = 3 W/ft low power (24V)
- M = 6 W/ft mid power (24V)
- H = 10 W/ft high power (24V)

CRI/CCT (90+ CRI)²

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

Driver (Remote)³

- X = No driver, ordered separately
- S = Standard, non-dim driver 120-277V
- D010 = eldoLED, 10%, 0-10V dimming, 120-277V
- DPH = Phase Dimming, 1% dimming, 120V only
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- EL96 = eldoLED, 24V, 0.1% 0-10V Dimming LED, 120-277V

Lens

- OD = Satin opal diffuser (standard)

Finish

- W = White, 15% gloss, RAL 9003
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finish, specify RAL code

Options

- MP = Mounting plate for horizontal J-box
- EM = Emergency (remote)

Whitegoods reserves the right to change any information without prior notice.

Notes

- Wattage shown does not include power supplies/drivers.
- See photometric data sheet for delivered lumens.
- See power supply page for details.

