




Contents	
1	overview
2	specifications / configurator
3	photometry



Surface wall or ceiling mounted fixture with indirect lighting for outdoor use.

- Surface wall or ceiling mounted fixture with indirect lighting for Outdoor use.
- Extruded aluminum housing, easily installed internal LED tray assembly. Remote driver. Field replaceable LED boards.
- Satin opal diffuser for high efficiency and soft edge beam without striations.
- Efficacy up to 73 lumens per watt (delivered).
- 90+ CRI, 3 Step MacAdam.
- L70 (TM21 Projected 85°C) Static White 50,000 hours.
- ETL and ETL-C for dry, damp or wet locations.
- Powdercoat painted.

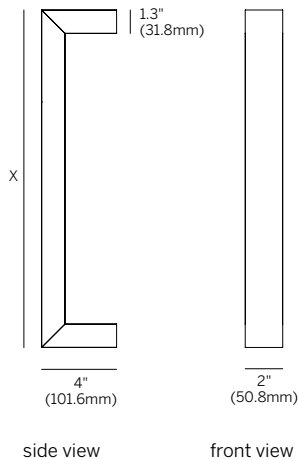

Direct mount or optional mounting (MP) to horizontal J-box (by others)

2.2" (55.9mm)

4.1" (104.1mm)

Ordering Information								
WG-CLWL	SW					OD		
Model	Fixation	Length	Power ¹	CRI/CCT ²	Driver ³	Lens	Finish	Options
WG-CLWL	SW	24 36 48 60 XX	L M H	927 930 935 940	X S D010 DPH L3DAE L3D0E EL96	OD	W B S BR F	MP EM

Model

- WG-CLWL = City Linear Outdoor

Fixation

- SW = Surface wall or ceiling

Length

- 24 = 24"
- 36 = 36"
- 48 = 48"
- 60 = 60"
- XX = Specify inches to the nearest 0.25 (i.e. 72.25") (max length 96")

Power¹

- XL = 1.5 W/ft extra low power (24V)
- L = 3.0 W/ft low power (24V)
- M = 6.5 W/ft mid power (24V)

CRI/CCT (90+ CRI)²

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

Driver (Remote)³

- X = No driver, ordered separately
- S = Standard, non-dim driver 120-277V
- D010 = eldoLED, 10%, 0-10V dimming, 120-277V
- DPH = Phase Dimming, 1% dimming, 120V only
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- EL96 = eldoLED, 24V, 0.1% 0-10V Dimming LED, 120-277V

Lens

- OD = Satin opal diffuser (standard)

Finish

- W = White, 15% gloss, RAL 9003
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- BR = Bronze, 15% gloss, RAL8019
- F = Custom finish, specify RAL code

Options

- MP = Mounting plate for horizontal J-box
- EM = Emergency (remote)

1 Wattage shown does not include power supplies/drivers.


2 See photometric data sheet for delivered lumens.

3 See power supply page for details.


WG-CLWL-...-OD-W				
DELIVERED LUMENS PER FOOT				
CCT	POWER			
	XL [1.5 W/ft]	L [3 W/ft]	M [6.5 W/ft]	
	927	99	195	418
	930	109	214	460
	935	109	214	460
	940	114	223	479

Power Multiplier			
	XL [1.5 W/ft]	L [3 W/ft]	M [6.5 W/ft]
	0.24	0.47	1.00

CCT Multiplier			
	927	930	935
	0.91	1.00	1.00
			940
			1.04

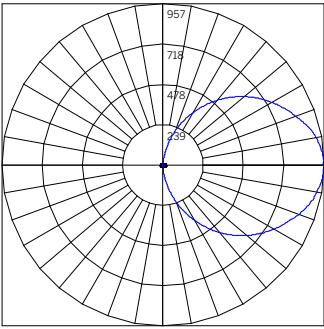

ISOILLUMINANCE - 48" OD M 3500K
WG-CLWL-...-S-48-M-935-...-OD-W'

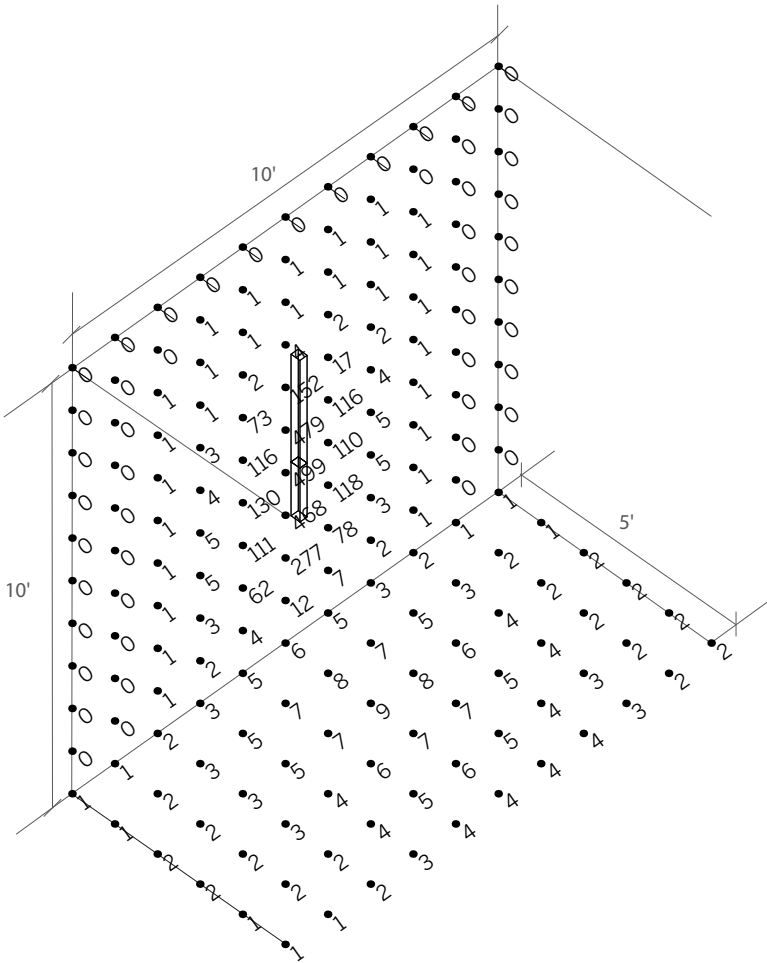

*Polar Plot and Cone of Light are applicable to part number noted; use Multiplication Factor table to approximate other models or refer to online photometry.