



ProTools 60 Linear Direct/Indirect Wall Wash Suspended

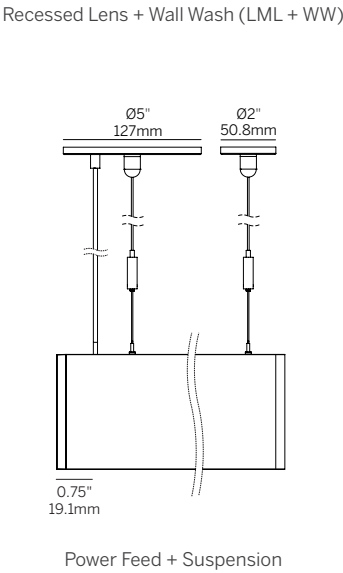

2.4" aperture suspended bi-directional luminaire that offers wall wash optics for illuminating walls up to 30' in height. Indirect light used to provide voluminous illumination towards the ceiling plane.

Housing	Precision extruded aluminum for true dimensions and tolerances Toolless component assembly Field adjustable suspension height and position <i>Sure-lock</i> mechanical connection system eliminates light leak Standard and tailored lengths and corner configurations Recessed snap-in cover for non-illuminated section Finishes: white, black, silver and custom Clear suspension cables with white ceiling escutcheons standard
Integration	Ceiling canopy mounts to any ceiling surface
Distribution	Wall Wash Batwing and asymmetric uplight options
LED	Static White, 2700K - 4000K, 1.5 W - 15 W/ft, constant current, >90 CRI, 3-Step MacAdam Tunable White, 1800K - 4000K / 2700K - 6500K, 1.5 W - 15 W/ft, constant current, >90 CRI L70 (TM21 Projected 85°C) Static White / Tunable White = 50,000 hours
Optic	LML - Linear Micro-prismatic Lens - diffusion and efficiency for wall wash
Reflector	White: high efficiency Silver: low brightness All 15% gloss Custom finish available
Driver	Compatible with quality constant current drivers
Connectivity	Lutron Athena Wireless Node RF Casambi BlueTooth
Weight	4lbs per foot
Operating Temp	Suitable for operation in maximum ambient temperature of 35C (95F)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE
Voltages	120-277VAC

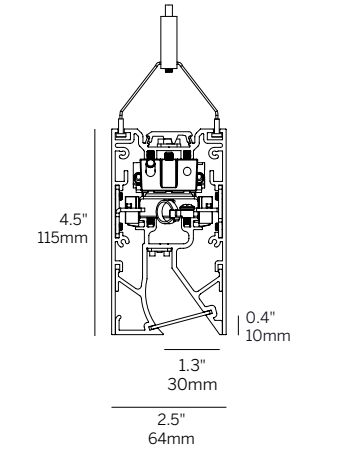

ProTools 60 Linear Direct/Indirect Wall Wash Suspended

Model ¹	Fixation	Pattern	Length ³	CRI/CCT	Direct			Indirect		Driver ⁶	Housing Finish	Reflector Finish	Options
					Optic	Beam	Power ⁵	Optic	Power ⁵				
WG-60PTLDI	S48 S96 SXX	S P ² PI ² PO ² PZ ²	24 48 96 XX ⁴	927 930 935 940 TW1840 ⁴ TW2765 ⁴	LML	WW	P1 P2 P3 P4	A W	P1 P2	E1 L1 D2DT6 D2DT8	W (std) B S F	W S F	AWNRF BT DC EM

- Model¹**
- WG-60PTLDI = ProTools 60 Linear Direct/Indirect Wall Wash
- Fixation**
- Power suspension w/5" canopy standard. Non-feed suspensions provided with 2" canopy
- S48 = 48" suspension cable
 - S96 = 96" suspension cable
 - SXX = Specify suspension cable length to nearest 0.25"
- Pattern**
- S = Straight run
 - P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane¹
 - PI = Standard patterns 2, 3 or 4 sided with 90° inside corners on the same plane¹
 - PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane¹
 - PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory²

- Length³**
- 24 = 24"
 - 48 = 48"
 - 96 = 96"
 - XX = Specify inches to the nearest 0.25"⁴

- CRI/CCT (90+ CRI)**
- 927 = 2700K
 - 930 = 3000K
 - 935 = 3500K
 - 940 = 4000K
 - TW1840 = Tunable white 1800K - 4000K⁴
 - TW2765 = Tunable white 2700K - 6500K⁴

- Optic Direct**
- LML = Linear micro-prismatic lens

- Optic Indirect**
- A = Asymmetric
 - W = Wide (batwing)

- Beam**
- WW = Wall Wash
- Power Direct⁵**
- P1 = 3 W/ft
 - P2 = 6 W/ft
 - P3 = 10 W/ft
 - P4 = 15 W/ft

- Power Indirect** Lens (W/A)⁵
- P1 = 3 W/ft
 - P2 = 6 W/ft

- Driver (Integral)⁶**
- E1 = eldoLED 0.1% dimming, 0-10V (120-277V)
 - L1 = Lutron 1% dimming, Ecosystem (120-277V)
 - D2DT6 = DALI-2 (DT6) 0.1% dimming (120-277V)
 - D2DT8 = DALI-2 (DT8) 0.1% dimming (120-277V) [TW only]

- Housing Finish**
- W = White, 15% gloss, RAL 9003 (standard)
 - B = Black, 15% gloss, RAL 9005
 - S = Silver, 15% gloss, RAL 9006
 - F = Custom finished trim, specify RAL

- Reflector Finish**
- W = White, 15% gloss, RAL 9003 (standard)
 - S = Silver, 15% gloss, RAL 9006
 - F = Custom finished trim, specify RAL

- Options**
- AWNRF = Lutron Athena Wireless Node RF (specify with E1, D2DT6 or D2DT8)
 - BT = Wireless CAS – Casambi (specify with E1, D2DT6 or D2DT8) (Remote)
 - DC = Dual circuit
 - EM = Emergency

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- To specify Indirect only, leave direct (optic, beam, power) codes blank.
 - See pattern spec sheet.
 - Individual fixture lengths less than 2' may require remote driver.
 - Specify Tunable White products in 3" increments for continuous light.
 - Refer to specsheet for delivered lumen data for all product configurations.
 - See power supply page for details.