

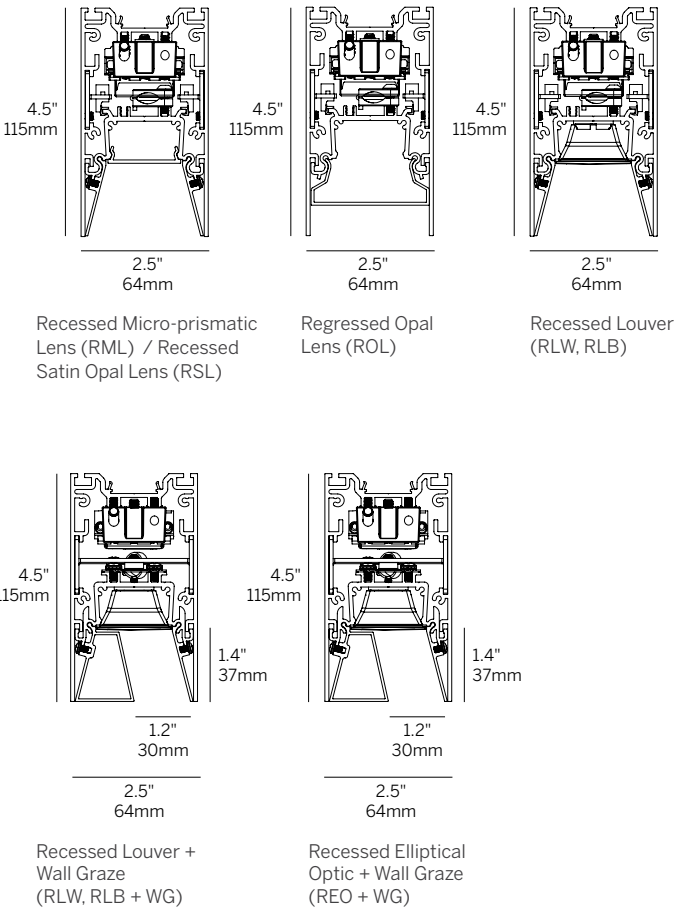


ProTools 60 Linear Downlight Surface Mount

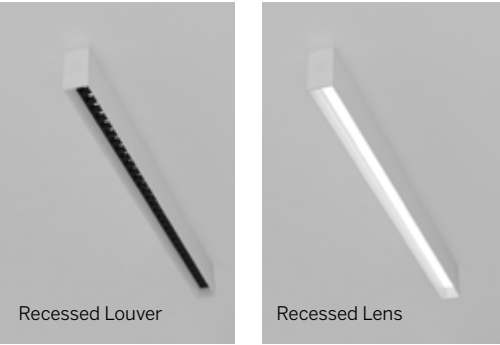

2.4" aperture surface mounted linear downlight that offers lensed or louvered optics for illuminating spaces up to 30' high.

Housing	Precision extruded aluminum for true dimensions and tolerances Toolless component assembly Field adjustable suspension height and position <i>Sure-lock</i> mechanical connection system eliminates light leak Standard and tailored lengths and corner configurations Recessed snap-in cover for non-illuminated section Finishes: white, black, silver and custom Clear suspension cables with white ceiling escutcheons standard
Integration	Ceiling canopy mounts to any ceiling surface
Distribution	30, 35, 50, 80, 105 degree symmetrical downlight Batwing and asymmetric uplight options, Wall Graze
LED	Static White, 2700K - 4000K, 1.5 W - 15 W/ft, constant current, >90 CRI, 3-Step MacAdam Tunable White, 1800K - 4000K / 2700K - 6500K, 1.5 W - 15 W/ft, constant current, >90 CRI L70 (TM21 Projected 85°C) Static White / Tunable White = 50,000 hours
Optic	RML - Recessed Micro-prismatic Lens diffuse illumination with maximum efficiency from deep regress lens RSL - Recessed Satin Opal Lens diffuse illumination from evenly illuminated, deep regress lens ROL - Regressed Opal Lens diffuse illumination from evenly illuminated, slight regress lens RLW/RLB - Recessed Louver White (W) or Black (B) extreme cutoff RNO - Recessed Narrow Optic narrow beam with maximum punch A/W - Snap-on Acrylic Uplight Optic - batwing or asymmetric distribution
Reflector	White: high efficiency (standard with RLW) Black: no brightness (standard with RLB) Silver: low brightness All 15% gloss Custom finish available
Driver	Compatible with quality constant current drivers
Connectivity	Lutron Athena Wireless Node RF Casambi BlueTooth
Weight	4lbs per foot
Operating Temp	Suitable for operation in maximum ambient temperature of 35C (95F)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE
Voltages	120-277VAC

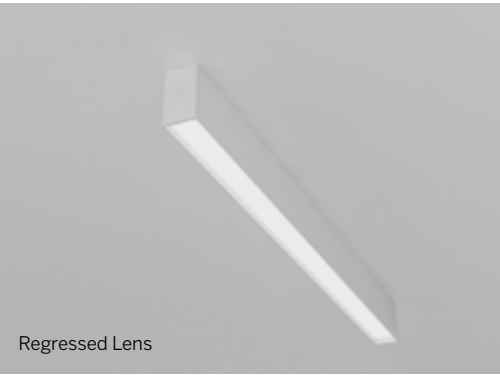

ProTools 60 Linear Downlight Surface Mount

Model	Fixation	Pattern	Length ²	CRI/CCT	Optic ³	Beam	Power ⁴	Driver ⁵	Housing Finish	Reflector Finish	Options
WG-60PTL	SM	S P ¹ PPI ¹ PPO ¹ PI ¹ PO ¹ PZ ¹	24 48 96 XX ³	927 930 935 940 TW1840 TW2765	RML RSL ROL RLW RLB REO	80 105 35 50 WG	P1 P2 P3 P4	E1 L1 D2DT6 D2DT8	W (std) B S F	W B S F	AWNRF BT EW EWP WCY EM

Model

- WG-60PTL = ProTools 60 Linear Downlight

Fixation

- SM = Surface Mount

Pattern

- S = Straight run
- P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane¹
- PPI = Pattern, Plane to Plane, Inside. 2-3-4 sided pattern with inside corners [RML / ROL only]
- PPO = Pattern, Plane to Plane, Outside. 2-3-4 sided pattern with outside corners [RML / ROL only]
- PI = Standard patterns 2, 3 or 4 sided with 90° inside corners on the same plane [WG only]¹
- PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane [WG only]¹
- PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory¹

Length²

- 24 = 24"
- 48 = 48"
- 96 = 96"
- XX = Specify inches to the nearest 0.25"³

CRI/CCT (90+ CRI)

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- TW1840 = Tunable white 1800K - 4000K
- TW2765 = Tunable white 2700K - 6500K

Optic³

- RML = Recessed micro-prismatic lens
- RSL = Recessed satin opal lens
- ROL = Regressed opal lens
- RLW = Recessed louver white (supplied with white reflectors standard)
- RLB = Recessed louver black (supplied with black reflectors only)
- REO = Recessed elliptical optic

Beam

- 80 = 80° (RML, RSL)
- 105 = 105° (ROL)
- 35 = 35° (RLW, RLB)
- 50 = 50° (RLW, RLB)
- WG = Wall Graze (RLW, RLB, REO)

Power⁴

- P1 = 3 W/ft
- P2 = 6 W/ft
- P3 = 10 W/ft
- P4 = 15 W/ft

Driver (Integral)⁵

- E1 = eldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, Ecosystem (120-277V)
- D2DT6 = DALI-2 (DT6) 0.1% dimming (120-277V)
- D2DT8 = DALI-2 (DT8) 0.1% dimming (120-277V) [TW only]

Housing Finish

- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finished trim, specify RAL

Reflector Finish

- W = White, 15% gloss, RAL 9003 (standard with RLW)
- B = Black, 15% gloss, RAL 9005 (standard with RLB)
- S = Silver, 15% gloss, RAL 9006
- F = Custom finished trim, specify RAL

Options

- AWNRF = Lutron Athena Wireless Node RF (specify with E1, D2DT6 or D2DT8)
- BT = Wireless CAS – Casambi (specify with E1, D2DT6 or D2DT8) (Remote)
- EW = End wall bracket
- EWP = End wall power bracket
- WCY = Wood ceiling yoke
- EM = Emergency

Whitegoods reserves the right to change any information without prior notice.

Notes

1 See pattern spec sheet.

2 Individual fixture lengths less than 2' may require remote driver.

3 Specify Lensed products to nearest 0.25". Specify Louvered and Tunable White products in 3" increments for continuous light. Louver supplied in 4" increments, balance of the run will have recessed blank covers on ends. REO only available with WG.

4 Refer to specsheet for delivered lumen data for all product configurations.

5 See power supply page for details.

