



ProTools 60 Linear Perimeter Recessed

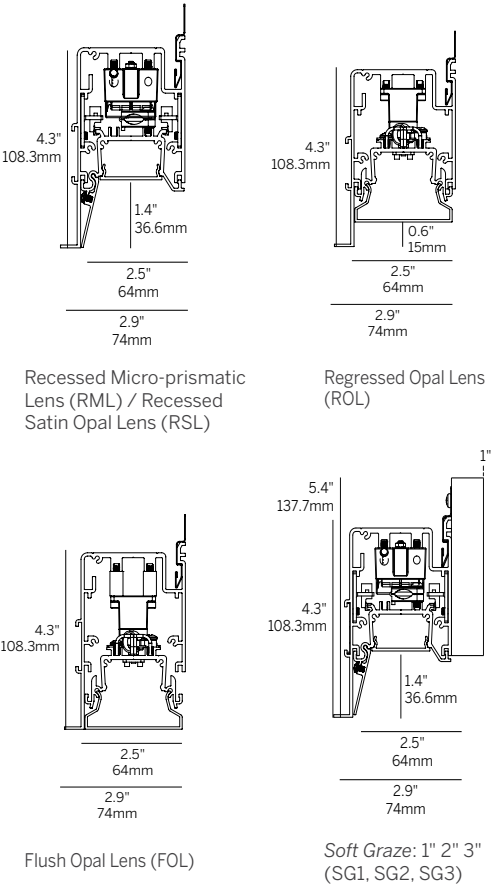

2.4" aperture recessed linear perimeter lensed fixture with flush, recessed or regressed lens compatible with all ceiling types for illuminating walls up to 30' high. Evenly illuminated lens provides consistent illumination for highlighting perimeter walls. *Soft Graze* bracket option provides additional offset when needed.


Housing	Precision extruded aluminum for true dimensions and tolerances Toolless component assembly from below Perfect fit with inserts and lenses Standard and tailored lengths including corner configurations <i>Soft Graze</i> adds 1" - 3" additional set-off for less dramatic graze Recessed snap-in cover for non-illuminated section Finishes: white, black, silver and custom
Integration	Fixation into gypsum, hard ceilings and all grid ceiling types Finished wall continues past the ceiling line
Distribution	Evenly illuminated regressed, recessed lens or <i>Soft Graze</i>
LED	Static White, 2700K - 4000K, 1.5 W - 15 W/ft, constant current, >90 CRI, 3-Step MacAdam Tunable White, 1800K - 4000K / 2700K - 6500K, 1.5 W - 15 W/ft, constant current, >90 CRI L70 (TM21 Projected 85°C) Static White / Tunable White = 50,000 hours
Optic	RML - Recessed Micro-Prismatic Lens diffusion with maximum efficiency RSL - Recessed Satin Opal Lens recessed evenly illuminated line of light ROL - Regressed Opal Acrylic Lens evenly illuminated line of light FOL - Flush Opal Acrylic Lens evenly illuminated line of light
Reflector	White: high efficiency (standard with RLW) Black: no brightness (standard with RLB) Silver: low brightness All 15% gloss Custom finish available
Driver	Compatible with quality constant current drivers
Connectivity	Lutron Athena Wireless Node RF Casambi BlueTooth
Weight	4lbs per foot
Operating Temp	Suitable for operation in maximum ambient temperature of 35C (95F)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Chicago Plenum
Voltages	120-277VAC

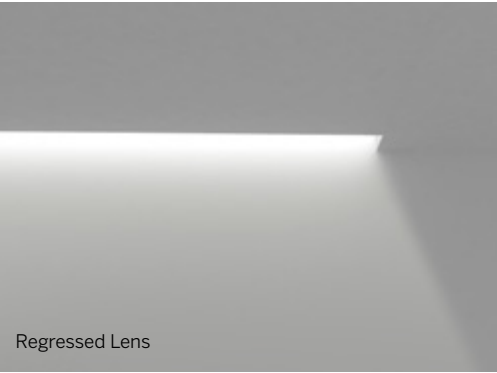

ProTools 60 Linear Perimeter Recessed

Model	Fixation	Pattern	Length ²	CRI/CCT	Optic	Beam	Power ³	Driver ⁴	Housing Finish	Reflector Finish	Options
WG-60PTLP WG-60PTLPSG1 WG-60PTLPSG2 WG-60PTLPSG3	RPT RBT RGT9 RGT15	S PI ¹ PO ¹	24 48 96 XX	927 930 935 940 TW1840 TW2765	RML RSL ROL FOL	80 105	P1 P2 P3 P4	E1 L1 D2DT6 D2DT8	W (std) B S F	W (std) B S F	AWNRF BT CP NYC TF EM

- Model**
- WG-60PTLP = ProTools 60 Linear Perimeter
 - WG-60PTLPSG1 = ProTools 60 Linear Perimeter *Soft Graze* 1" extension
 - WG-60PTLPSG2 = ProTools 60 Linear Perimeter *Soft Graze* 2" extension
 - WG-60PTLPSG3 = ProTools 60 Linear Perimeter *Soft Graze* 3" extension
- Fixation**
- RPT = Recessed plaster trim
 - RBT = Recessed trim for hard ceiling
 - RGT9 = Recessed trim for 9/16" grid
 - RGT15 = Recessed trim for 15/16" grid
- Pattern**
- S = Straight run
 - PI = Standard patterns 2, 3 or 4 sided with 90° inside corners on the same plane¹
 - PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane¹
- Length²**
- 24 = 24"
 - 48 = 48"
 - 96 = 96"
 - XX = Specify inches to the nearest 0.25"
- CRI/CCT (90+ CRI)**
- 927 = 2700K
 - 930 = 3000K
 - 935 = 3500K
 - 940 = 4000K
 - TW1840 = Tunable white 1800K - 4000K
 - TW2765 = Tunable white 2700K - 6500K
- Optic**
- RML = Recessed micro-prismatic lens
 - RSL = Recessed satin opal lens
 - ROL = Regressed opal lens (N/A with *Soft Graze*)
 - FOL = Flush opal lens (N/A with *Soft Graze*)
- Beam**
- 80 = 80° (RML, RSL)
 - 105 = 105° (ROL, FOL)
- Power³**
- P1 = 3 W/ft
 - P2 = 6 W/ft
 - P3 = 10 W/ft
 - P4 = 15 W/ft
- Driver (Integral)⁴**
- E1 = eldoLED 0.1% dimming, 0-10V (120-277V)
 - L1 = Lutron 1% dimming, Ecosystem (120-277V)
 - D2DT6 = DALI-2 (DT6) 0.1% dimming (120-277V)
 - D2DT8 = DALI-2 (DT8) 0.1% dimming (120-277V) [TW only]
- Housing / Trim Finish**
- W = White, 15% gloss, RAL 9003 (standard)
 - B = Black, 15% gloss, RAL 9005
 - S = Silver, 15% gloss, RAL 9006
 - F = Custom finished trim, specify RAL
- Reflector Finish**
- W = White, 15% gloss, RAL 9003
 - B = Black, 15% gloss, RAL 9005
 - S = Silver, 15% gloss, RAL 9006
 - F = Custom finished trim, specify RAL
- Options**
- AWNRF = Lutron Athena Wireless Node RF (specify with E1, D2DT6 or D2DT8)
 - BT = Wireless CAS – Casambi (specify with E1, D2DT6 or D2DT8)
 - CP = Chicago Plenum rated, complies with CCEA requirements
 - NYC = 6' whip per run
 - TF = Top feed
 - EM = Emergency

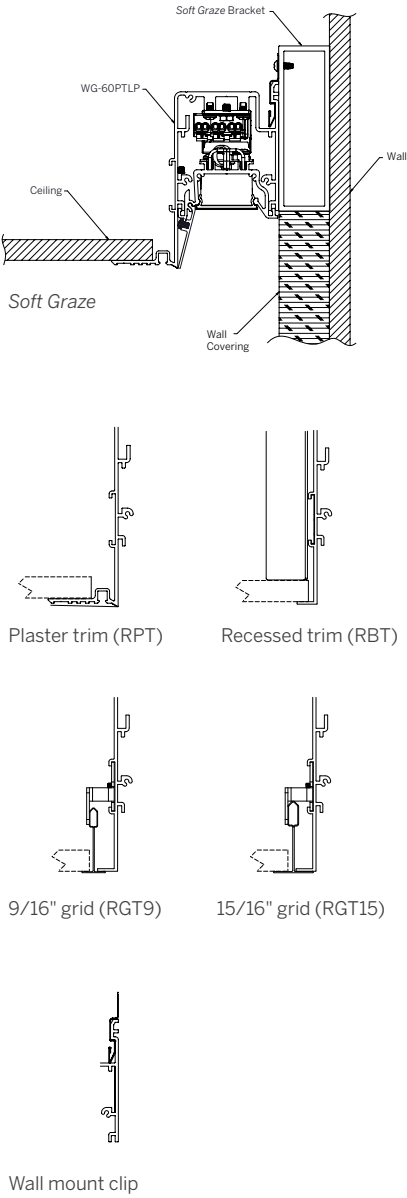

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- See pattern spec sheet.
 - Individual fixture lengths less than 2' may require remote driver.
 - Refer to specsheet for delivered lumen data for all product configurations.
 - See power supply page for details.

