

ProTools 60 Linear Perimeter

Recessed Wet Location



Contents



1	overview
2	specifications / configurator
3	photometry




Regressed Lens

A continuous linear system that delivers even illumination to a wall from above the finished ceiling to illuminate a space and define vertical surfaces.


- 2.4" aperture, integrated solution that is compatible with all ceiling types.
- Standard and tailored run lengths, including corners.
- Evenly illuminated perimeter lighting system with recessed optics minimizes brightness.
- Consistent LED technology throughout the Whitegoods product range.
- Easy to install housing allows the wall to continue above the finished ceiling.
- Flexible design allows exact wall-to-wall dimensions.
- Flicker-free full range dimming with standard driver (eldoLED).
- Efficacy up to 118 lumens per watt (delivered) @ 3000K, see photometry page for details.
- L70 (TM21 Projected 85°C) Static White (2700K-4000K) = 60,000 hours.
- ETL Wet Location for Outdoor applications.

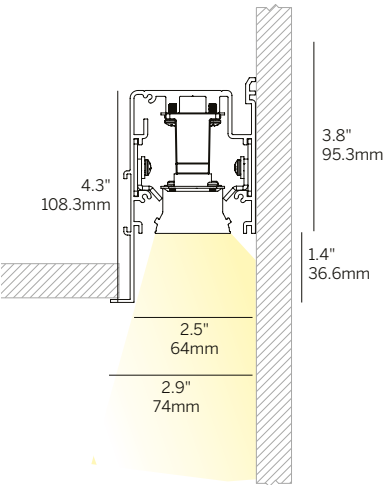

Wet Location (-WL)
Regressed Opal Lens (ROL)



Pattern Inside (PI)



Pattern Outside (PO)

Plaster Trim Cutout

Width: 3 1/8" / Length: fixture length + 1/2"
Ex: 96" fixture = 96 1/2" cutout length

Bezel Trim Cutout

Width: 2 11/16" / Length: fixture length + 1/8"
Ex: 96" fixture = 96 1/8" cutout length

whitegoods

powered by **HOLECTRON**

410 381 1497 inter-lux.com answers@inter-lux.com
Inter-lux reserves the right to make technical changes without notice.



updated 7.2026 1

ProTools 60 Linear Perimeter

Recessed Wet Location

Ordering Information										
WG-60PTLP-WL		S			ROL	105	M			
Model	Fixation	Pattern	Length	CRI/CCT	Optic	Beam	Power ¹	Driver ²	Housing Finish	Options
WG-60PTLP-WL	RPT RBT	S	24 48 96 XX	927 930 935 940	ROL	105	M	X S D010 DPH L3DAE L3DOE EL96 DALI DMX	W (std) B S F	AWNRF BT CP EM

Model

- WG-60PTLP-WL = ProTools 60 Linear Perimeter Wet Location

Fixation

- RPT = Recessed plaster trim
- RBT = Recessed trim for hard ceiling

Pattern

- S = Straight run

Length

- 24 = 24"
- 48 = 48"
- 96 = 96"
- XX = Specify inches to the nearest 2.5"

CRI / CCT (90+ CRI minimum)

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

Beam

- ROL = Regressed opal lens

Beam

- 105 = 105°

Power¹

- M = 6 W/ft

Driver (remote)²

- X = No driver, ordered separately
- S = Standard, non-dim driver 120-277V
- D010 = eldoLED, 10%, 0-10V dimming, 120-277V
- DPH = Phase Dimming, 1% dimming, 120V only
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- EL96 = eldoLED, 24V, 0.1% 0-10V Dimming
- DALI = eldoLED DALI (DT6), 0.1% dimming (120-277V)
- DMX = eldoLED, 24V, 0.1% DMX Dimming

Housing / Trim Finish

- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finished trim, specify RAL

Options

- AWNRF = Lutron Athena Wireless Node RF (specify with D010, EL96 or DALI)
- BT = Wireless CAS – Casambi (specify with D010, EL96, DALI or DMX)
- CP = Chicago Plenum rated, complies with CCEA requirements
- EM = Emergency LED driver (remote only)

¹ See photometric data sheet for delivered lumens.

² See power supply page for details.